



MikroTik hAP ac lite | WiFi Router | RB952Ui-5ac2nD, Dual Band, 5x RJ45 100Mb/s



link to the product:

<https://www.batna24.com/gb/p/routers/mikrotik-hap-ac-lite-wifi-router-rb952ui-5ac2nd-dual-band-5x-rj45-100mb-s>

Price: **195.58 zł** gross / 159.01 zł net



Manufacturer: MIKROTIK

Referention number: DNxEKPIOLRMPP

Information:

Mikrotik Routerboard RB952Ui-5ac2nD hAP ac lite is a compact, dual-band access point operating simultaneously on 2.4 GHz and 5 GHz networks, providing a stable connection and greater operational flexibility. The device is equipped with a 650 MHz processor, 64 MB RAM, five 10/100 Mbps Ethernet ports, and PoE output on port 5. An additional USB port allows a 3G/4G modem to be connected. The router runs on RouterOS with level 4 licence and supports the 2412-2484 MHz and 5150-5875 MHz ranges, making it a practical solution for home and small office use.

Product features

Height	89 mm
Width	113 mm
Depth	28 mm
Maximum data transfer rate	733 Mb/s
Power consumption (max)	8 W
USB 2.0 ports quantity	1
Harmonized System (HS) code	85176990
Networking standards	IEEE 802.11a
Ethernet LAN (RJ-45) ports	5
Antenna gain level (max)	2 gain
Flash memory	16 MB
DC-in jack	Yes
Operating temperature (T-T)	-30 - 70 °C
AC adapter included	Yes
Power over Ethernet (PoE)	Yes
Internal memory	64 MB

Placement	Table
AC input voltage	10 V
Product colour	White
Internal	No
5 GHz	Yes
2.4 GHz	Yes

Full product description


Mikrotik Routerboard RB952Ui 5ac2nD hAP ac lite

Routerboard **RB952Ui** 5ac2nD hAP ac lite is an **access point**, which operates in dual-band mode, in the 2.4 GHz and 5 GHz bands simultaneously.



Well equipped

The routerboard from MikroTik is equipped with a 650 MHz processor, 64 MB RAM, five 10/100 Mbps Ethernet ports (PoE output on port #5). Dual stream in 2.4 GHz wireless network and one stream at 5 GHz. Built-in USB port allows to connect a 3G/4G modem. The hAP ac lite device operates on RouterOS software with a level 4 license.

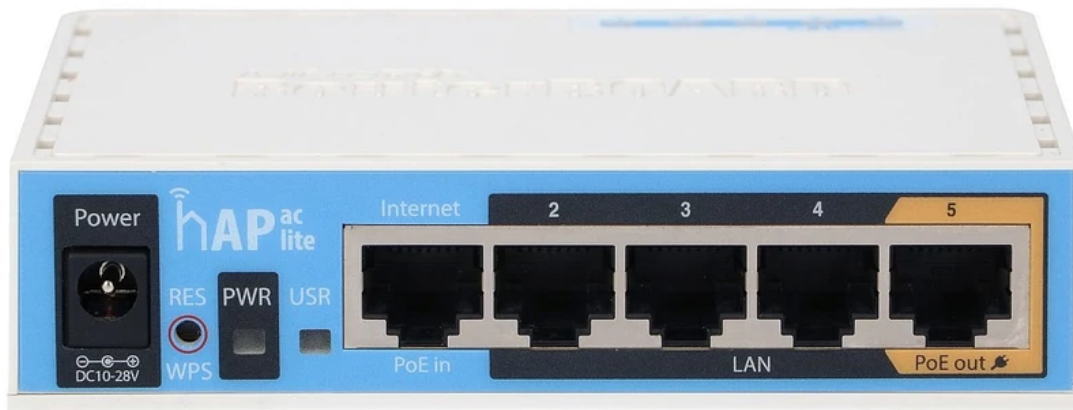

Operating frequency range

The version of RB952Ui-5ac2nD (hAP ac lite) router can operate in the 2412 - 2484 MHz and 5150 - 5875 MHz frequency ranges.

