



MikroTik SXTsq 5 ac | CPE | RBSXTsqG-5acD, 5GHz, 1x RJ45 1000Mb/s



link to the product:

<https://www.batna24.com/gb/p/radio-lines/mikrotik-sxtsq-5-ac-cpe-rbsxtsqg-5acd-5ghz-1x-rj45-1000mb-s>

Price: **220.27 zł** gross / 179.08 zł net



Manufacturer: MIKROTIK

Referention number: DNXFMPOQERMNGO

Product features

Height	34 mm
Antenna type	Internal
Receiver sensitivity	6MBit/s 25 -96 54MBit/s 21 -80 MCS0 25 -96 MCS7 20 -75 MCS9 18 -70
Width	129 mm
Depth	129 mm
Maximum data transfer rate	1000 Mb/s
Power consumption (max)	7 W
Package weight	492 g
Humidity measurement range	-40 - 70%
Harmonized System (HS) code	85176990
Networking standards	IEEE 802.11a
Ethernet LAN (RJ-45) ports	1
Antenna gain level (max)	16 gain
Flash memory	16 MB
Package depth	180 mm
Package height	45 mm
Package width	255 mm
Processor frequency	716 MHz
International Protection (IP) code	IP55
Operating system installed	RouterOS
Power over Ethernet (PoE)	Yes
Internal memory	256 MB

Placement	Pole
AC input voltage	10 V
Built-in processor	Yes
Product colour	White
Internal	No
5 GHz	Yes
2.4 GHz	No
Product weight	295 g

Full product description


MicroTik SXTsq 5 ac - Client device

SXTsq 5 ac is a compact and lightweight 5Ghz 802.11ac wireless device with a built-in antenna, ideal for point-to-point connections or as a **CPE** unit. The device has one 10/100/1000 Mbit Ethernet port to fully utilize the speed that 802.11ac protocol provides.



Antenna 16 dBi

SXTsq 5 ac retains a 16 dBi antenna like the SXT 5 ac, our previous model, but **the design of the antenna has been improved** and its physical size has been drastically reduced - **SXTsq is twice as thin**.

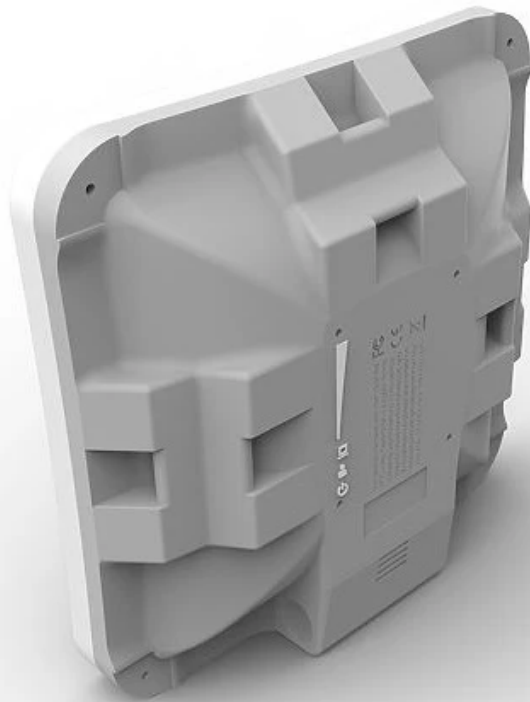

Weather resistant and easy to install - Microtik routerboard sxtsq 5 ac

Weather-resistant The housing has holes for direct fixing of the clamp in three different mounting locations, with the possibility of mounting on horizontal railings. There is also an easily accessible grounding connection that **protects it against lightning**.

