



Extralink SFP+ 10G | SFP+ WDM Module | 10Gbps 1270/1330nm, single mode, 20km, LC, DOM, pair



link to the product:

<https://www.batna24.com/gb/p/sfp-modules/extralink-sfp-10g-sfp-wdm-module-10gbps-1270-1330nm-single-mode-20km-lc-dom-pair>

Price: **230.05 zł** gross / 187.03 zł net

Manufacturer: EXTRALINK



Referention number: DNXXFFHPSERMMKO

Product features

SFP transceiver type	Fiber optic
CD-ROM interface type	SFP+
Maximum data transfer rate	10 Gb/s
Brand compatibility	Cisco
Maximum transfer distance	20 km
Rodzaj złącza światłowodowego	LC

Full product description

A set of economical 10G WDM 1270/1330NM SM 20KM SFP modules.

A set of two single-mode SFP inserts operate bi-directionally on a single fiber at **1270/1330 nm**, over a distance of up to **20 km**. The electrical interface of the 10G SFP fiber optic module conforms to SFI electrical specifications. The receiver converts **10 Gbit/s** serial optical data into PECL/CML serial electrical data. **The single-mode SFP insert** is equipped with a two-wire **I2C serial interface** for serial identification, digital diagnostics and module control. An enhanced digital diagnostics monitoring interface provides **real-time access to the SFP optical module**, allowing monitoring of received optical power, laser beam current, laser output power, etc. The single-mode SFP modules are dedicated to work with 10 Gbps Ethernet, SONET/SDH routers and switches, 10G/8.5G/4.25G/2.125G/1.0625G fiber channels and other 10 Gbps optical links.





Port speed:
10 Gb/s




Transmission
distance:
20km

Wavelength:
1270nm/1330nm

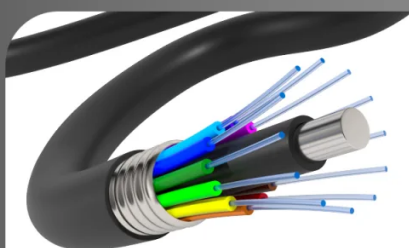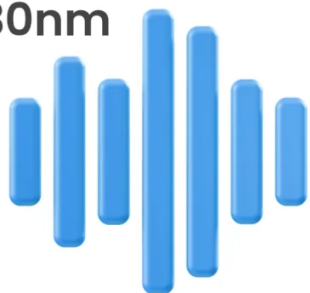

Fiber type:
Single Mode

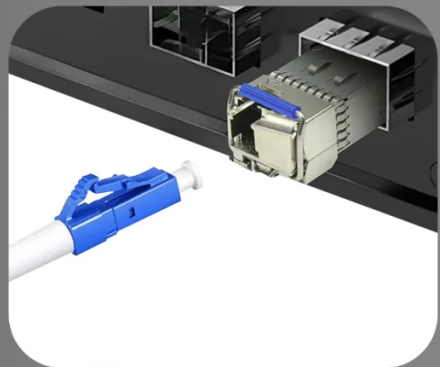


Special features

Wide compatibility

MSA compliant, suitable for switches, routers and fiber optic infrastructure without drivers



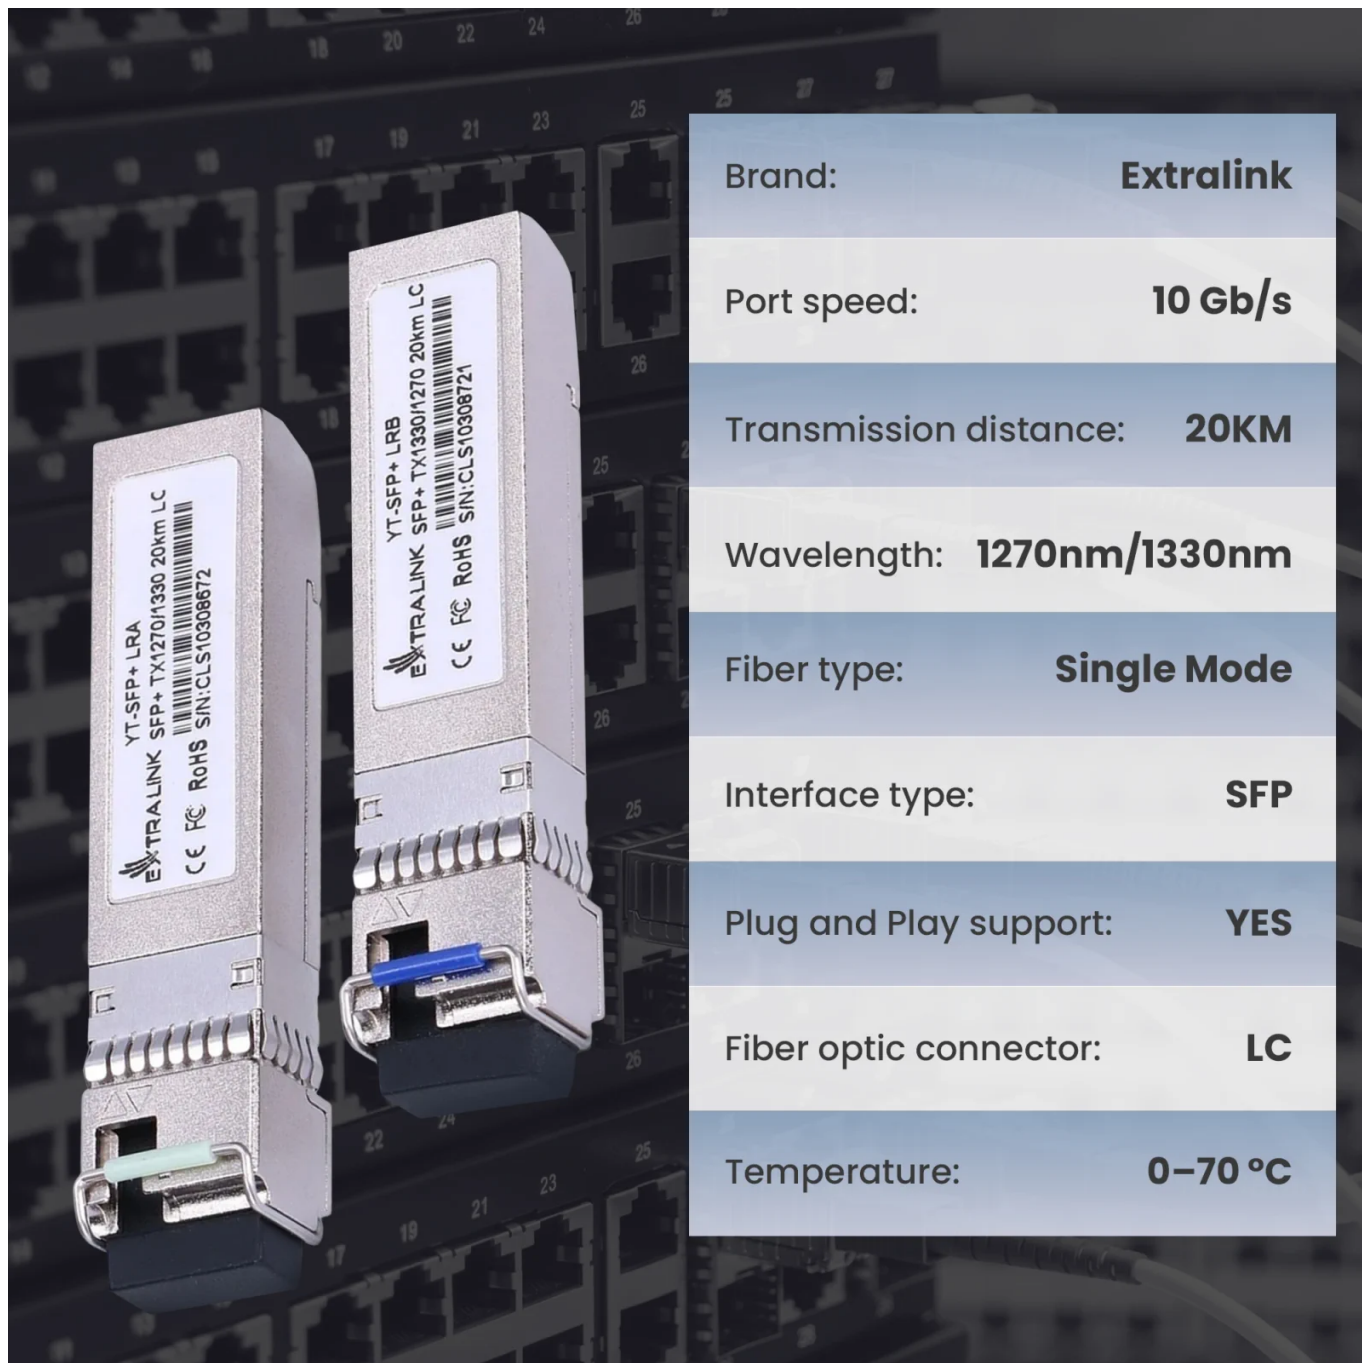

Brand: **Extralink**

Port speed: **10 Gb/s**

Transmission distance: **20KM**

Wavelength: **1270nm/1330nm**


Fiber type: **Single Mode**


Interface type: **SFP**


Plug and Play support: **YES**

Fiber optic connector: **LC**

Temperature: **0-70 °C**

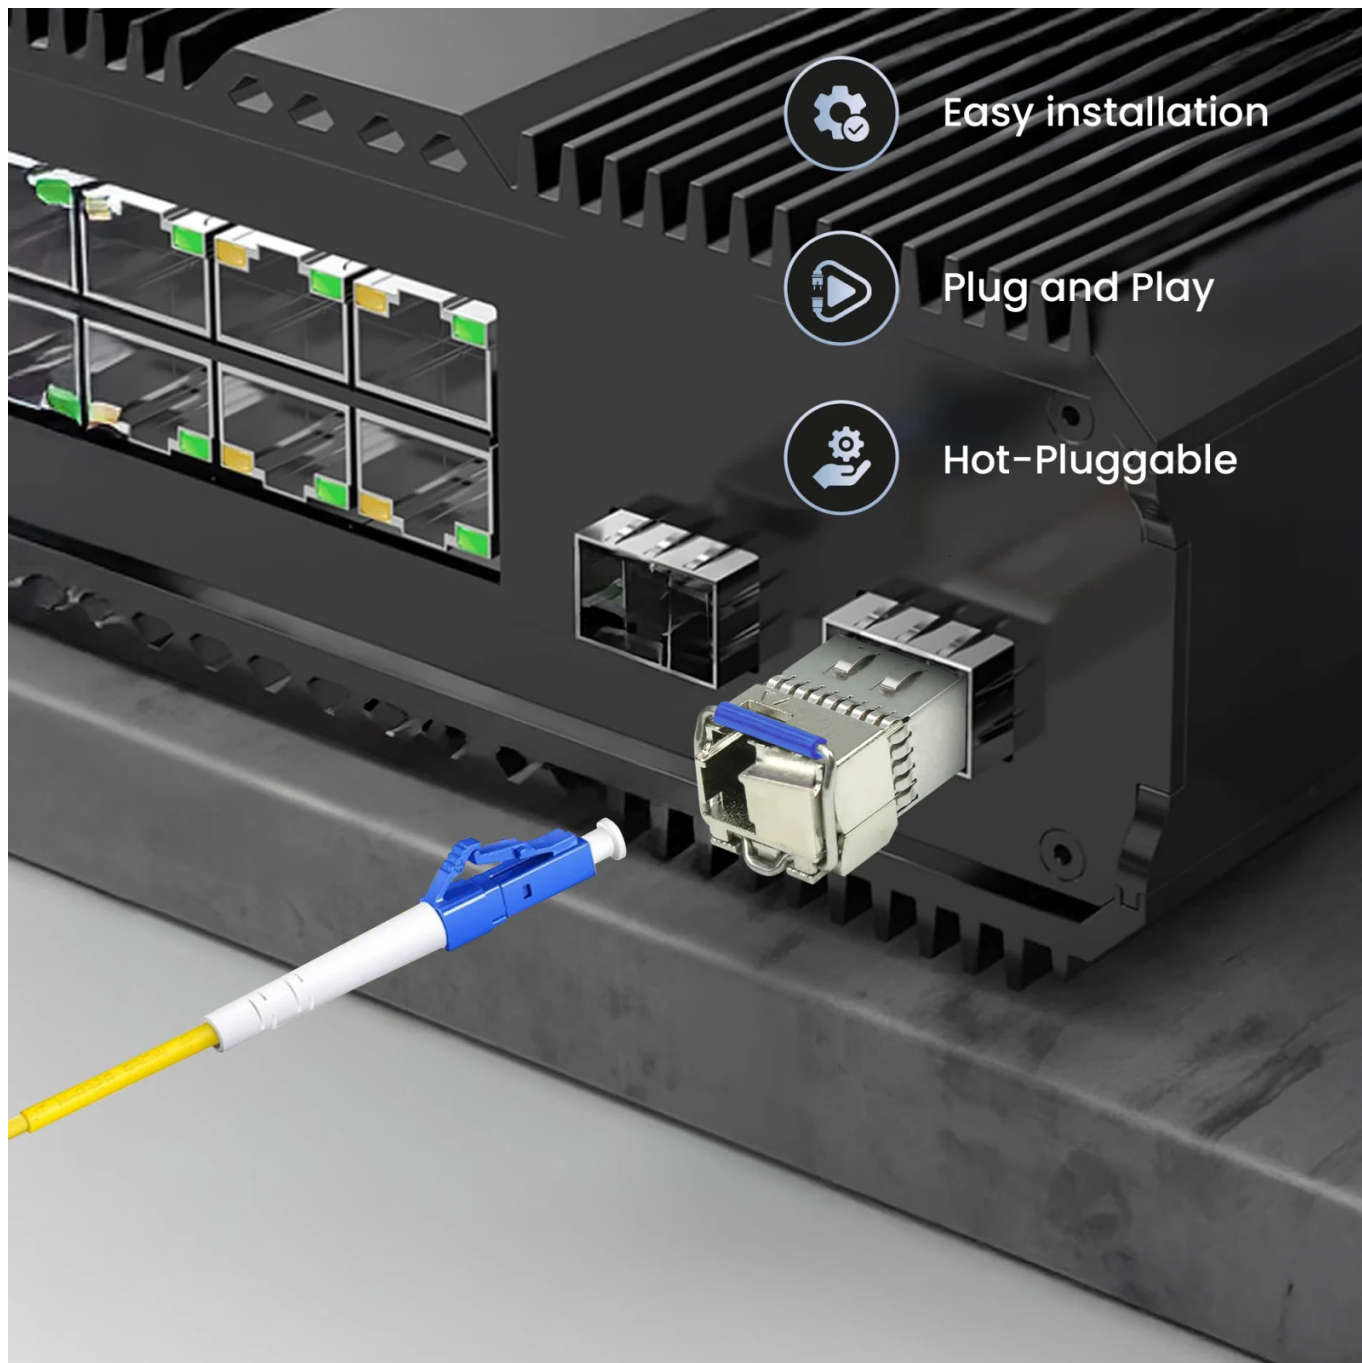

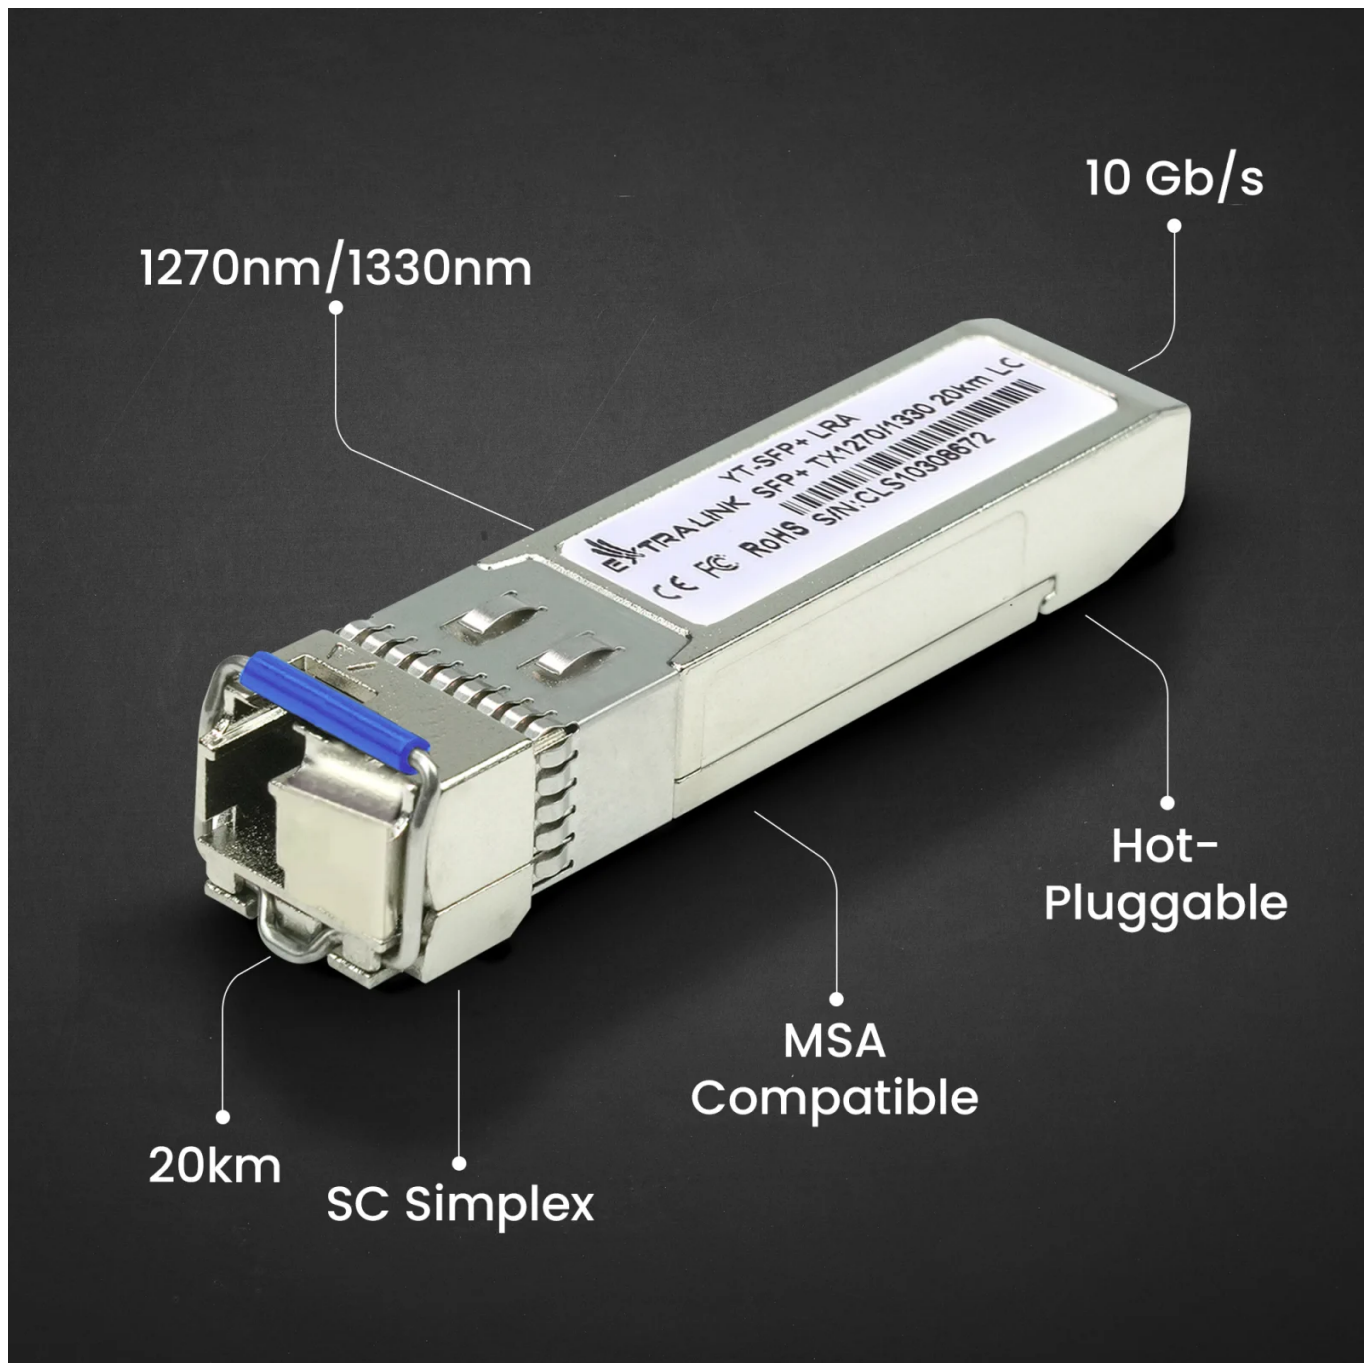

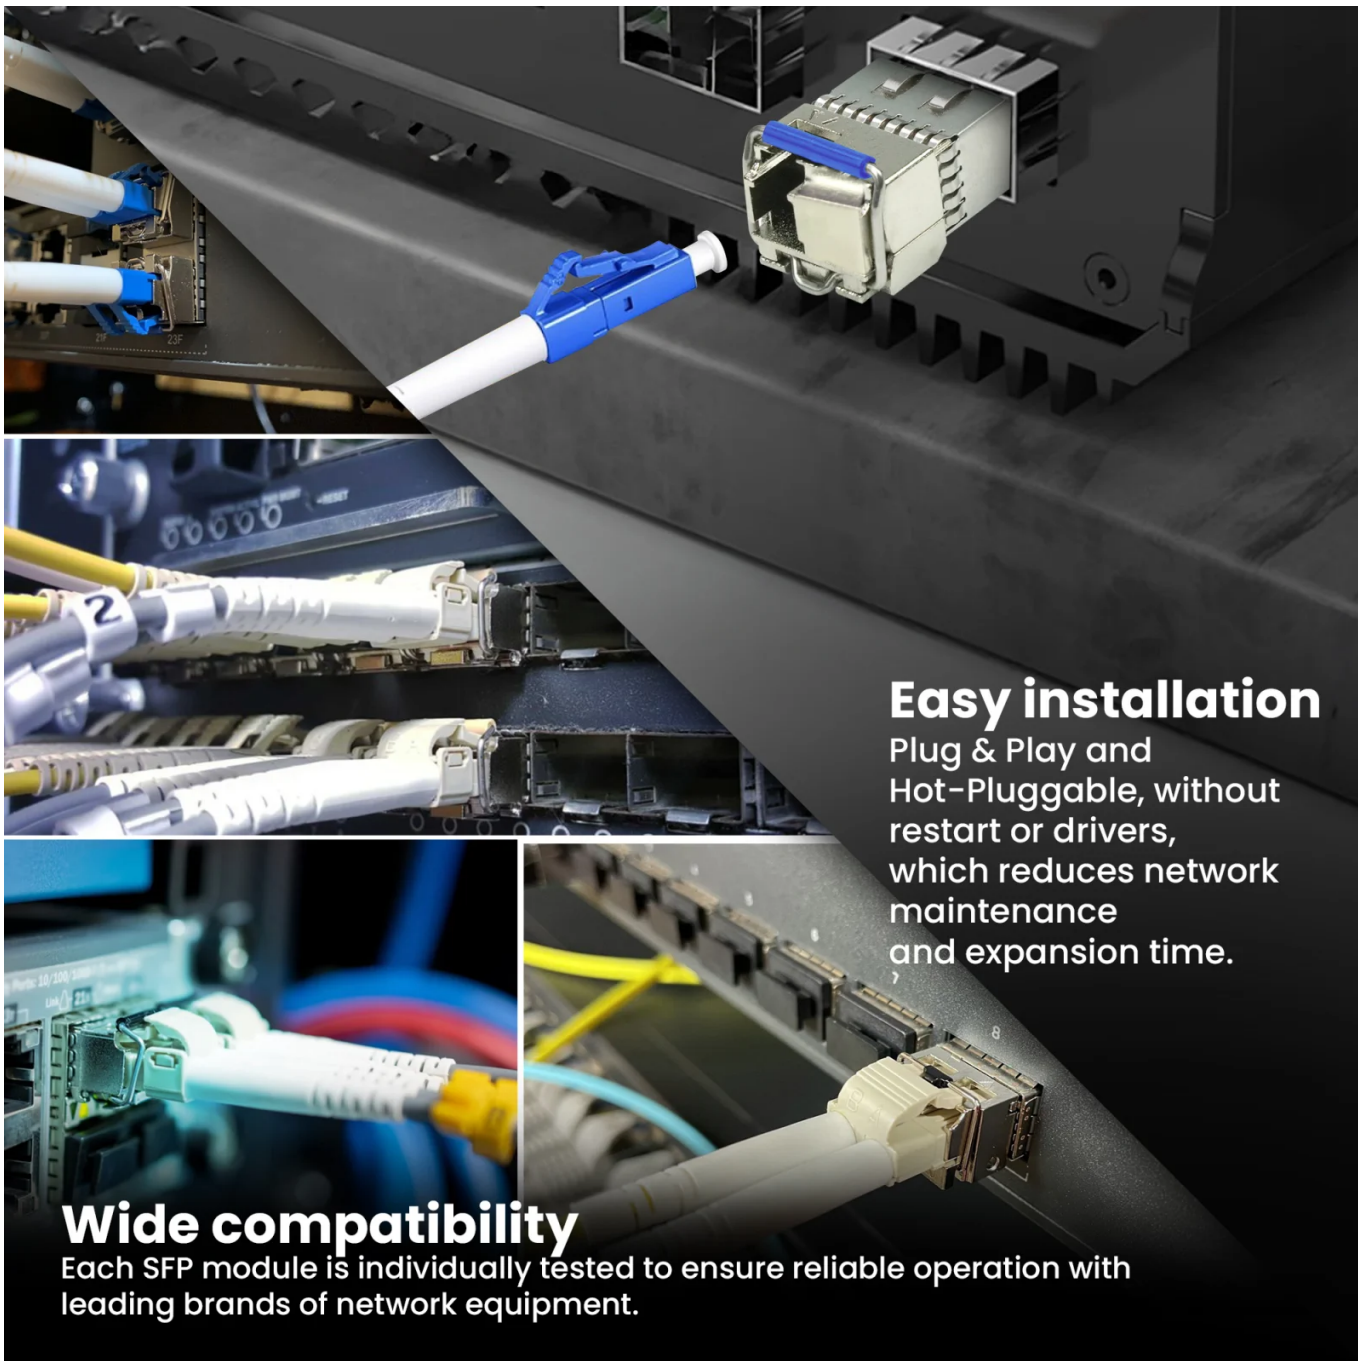

Easy installation

Plug & Play and Hot-Pluggable, without restart or drivers, which reduces network maintenance and expansion time.

Wide compatibility

Each SFP module is individually tested to ensure reliable operation with leading brands of network equipment.