



Extralink SFP28 25G | SFP28 WDM Module | 25Gbps 1270/1330nm, single mode, 10km, LC, DOM, pair



link to the product:

<https://www.batna24.com/gb/p/sfp-modules/extralink-sfp28-25g-sfp28-wdm-module-25gbps-1270-1330nm-single-mode-10km-lc-dom-pair>

Price: **878.71 zł** gross / 714.40 zł net

Manufacturer: EXTRALINK



Referention number: DNXGFQHJDRMLMP


Product features

SFP transceiver type	Fiber optic
CD-ROM interface type	SFP28
Maximum data transfer rate	25 Gb/s
Brand compatibility	Cisco
Wavelength	1310 nm
Maximum transfer distance	10 km
Rodzaj złącza światłowodowego	LC

Full product description

Cost-effective SFP28 25G module

The Extralink SFP28 25G is a cost-effective module that complies with the Gigabit Ethernet and 1000-BASE-T standards as defined by the **IEEE 802.3cc** standard and **supports bit rates up to 25.78 Gbps**. It is designed for use with Category 5 Ethernet cable over distances of up to 10 km. The transceiver designs are optimized for high performance and cost-effectiveness to provide customers with the best solution for single-lane 25 Gbps optical links. **The SFP28 insert** features ultra-low power consumption of no more than 1.5 W and an operating temperature range of 0°C to 70°C.


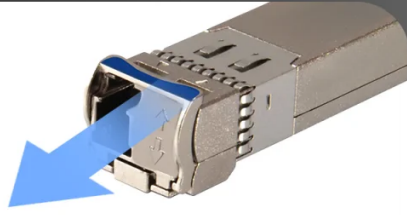


Port speed:
25G/s




**Transmission
distance:**
10km

Wavelength:
1270nm/1330nm

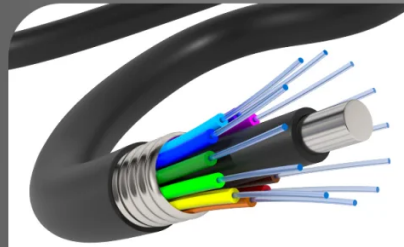

Fiber type:
SINGLE-MODE

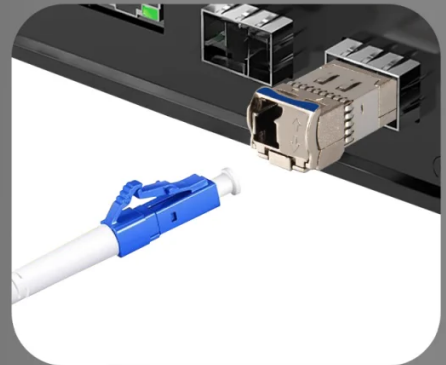


Product Features

- Supports bit rates up to 25.78 Gbps
- Compliant with IEEE 802.3cc
- Digital diagnostic monitor interface with SFF-8472
- 1310 nm DFB transmitter
- 10 km SMF connections
- High transmission margin
- Low power consumption <1.5 W
- Single 3.3 V power source
- Operating temperature range from 0°C to 70°C


Wide compatibility

MSA compliant, suitable for switches, routers, and fiber optic infrastructure without drivers



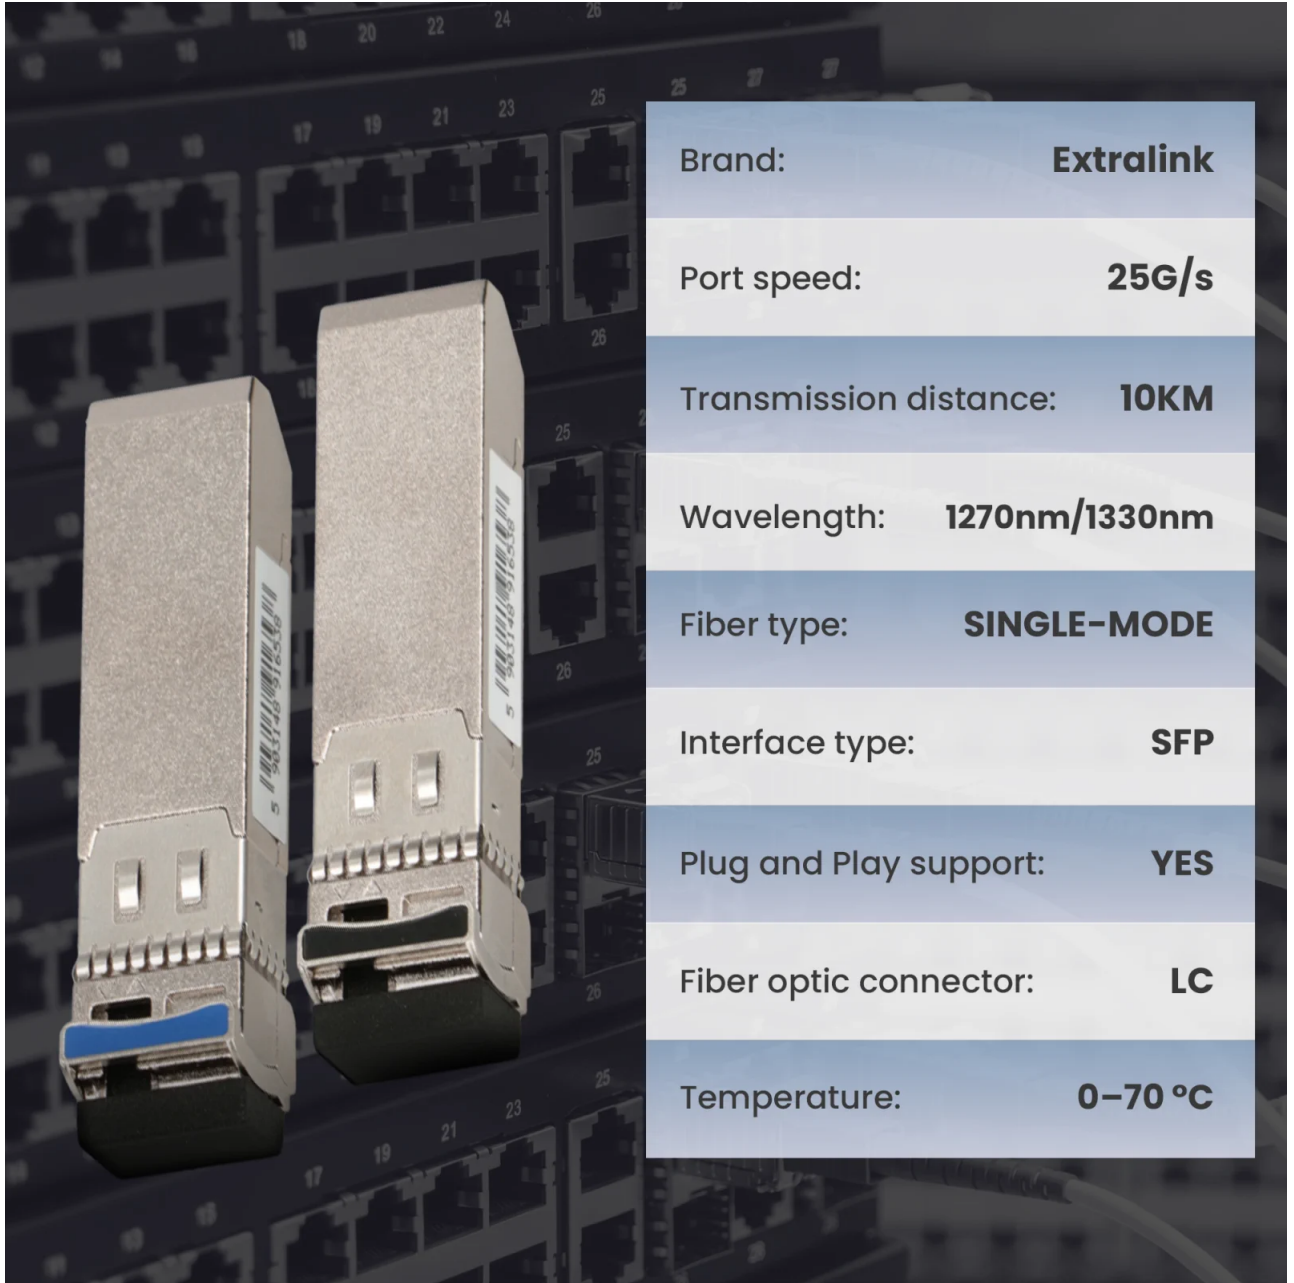

Brand:	Extralink
Port speed:	25G/s
Transmission distance:	10KM
Wavelength:	1270nm/1330nm
Fiber type:	SINGLE-MODE
Interface type:	SFP
Plug and Play support:	YES
Fiber optic connector:	LC
Temperature:	0-70 °C

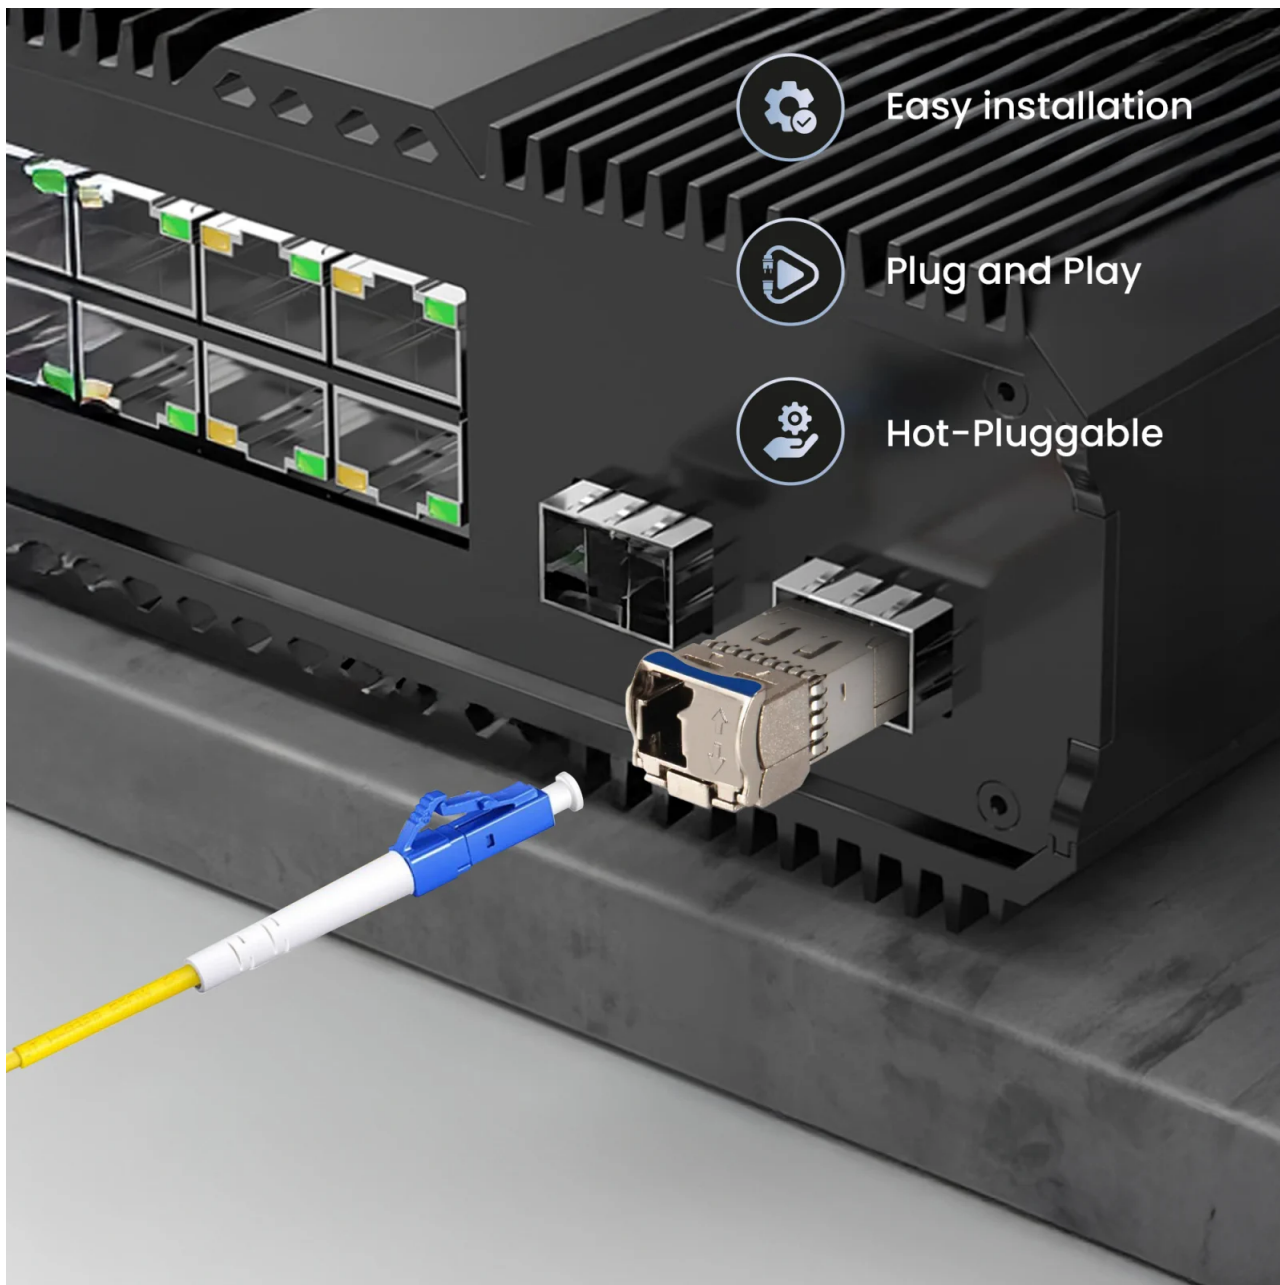





Easy installation

Plug & Play and Hot-Pluggable, without restart and drivers, which shortens network maintenance and expansion time.

Wide compatibility

Each SFP module is individually tested to ensure reliable operation with leading brands of network equipment.