



Teltonika DAP140 | Access point | Wi-Fi 4, passive PoE, 2x RJ45 100Mb/s



link to the product:

<https://www.batna24.com/gb/p/access-points/teltonika-dap140-access-point-wi-fi-4-passive-poe-2x-rj45-100mb-s>

Price: **247.67 zł** gross / 201.36 zł net



Manufacturer: TELTONIKA

Referention number: DNXXGHINKERMLOQ

Product features


Storage relative humidity (H-H)	-50 - 75%
Height	25 mm
Antenna type	External
LED indicators	Power
WAN connection	Ethernet (RJ-45)
Universal Plug and Play (UPnP)	Yes
Width	113.1 mm
Depth	68.6 mm
Security algorithms	OWE
Storage temperature (T-T)	10 - 90 °C
Maximum data transfer rate	300 Mb/s
IPv4 & IPv6 features	Dual stack IPv4/IPv6
Humidity measurement range	10 - 90%
VPN support	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard, Tinc, Tailscale
Networking standards	IEEE 802.11b
Ethernet LAN (RJ-45) ports	2
Flash memory	128 MB
RS-232 interface	No
Operating temperature (T-T)	-40 - 75 °C
Cabling technology	10/100Base-T(X)

Supported network protocols	TCP, UDP, IPv4, IPv6, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSL/TLS, ARP, VRRP, PPP, PPPoE, UPNP, SSH, DHCP, Telnet, SNMP, MQTT, Wake On Lan (WOL)
Reset button	Yes
Processor frequency	580 MHz
Web-based management	Yes
International Protection (IP) code	IP30
Operating system installed	RutOS
Power over Ethernet (PoE)	Yes
Internal memory	16 MB
Placement	Shelf
Wireless meshing	Yes
Built-in processor	Yes
Power over Ethernet (PoE) type supported	Passive PoE
Fast roaming	Yes
Product colour	Black
MAC address filtering	Yes
Antenna connector type	RP-SMA
Command-line interface (CLI)	Yes
Maximum data transfer rate (2.4 GHz)	300
DHCP client	Yes
DHCP server	Yes
Watch case material	Aluminium
6 GHz	No
5 GHz	No
2.4 GHz	Yes
Product weight	150 g

Full product description

Teltonika DAP140 - Wi-Fi Access Point 4 with Passive PoE

Expand your wireless network with the **Teltonika DAP140**, a **Wi-Fi 4 access point** that provides stable connectivity and wide compatibility with network devices. Equipped with **Passive PoE** and **two 100 Mbps RJ45 ports**, it allows for easy installation and efficient management of network traffic. With its **robust design and intuitive configuration**, it will work well in a variety of environments.

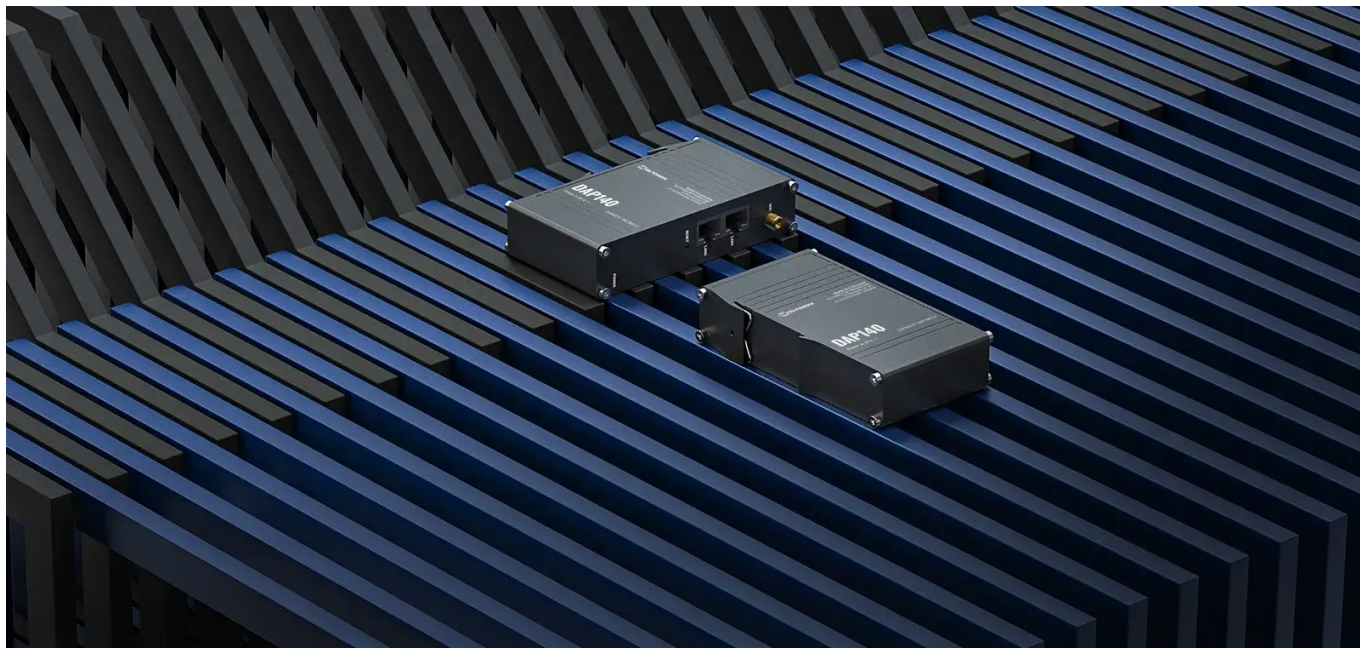

Stable wireless network

The Teltonika DAP140 enables **smooth data transmission with Wi-Fi 4 (IEEE 802.11b/g/n) support**. It can support **up to 50 simultaneous users**, making it a great choice for offices, warehouses and other spaces requiring **a strong Wi-Fi signal**. **Mesh (802.11s)** support provides greater range and connection stability.



Two RJ45 ports and Passive PoE

The device is **equipped with two RJ45 100 Mbps LAN ports** that allow wired connection of additional devices. **Passive PoE support** allows power to be supplied via an Ethernet cable, eliminating the need for an additional power supply. This solution allows for **faster and more flexible installation**.



Advanced security features

The DAP140 supports **modern security protocols**, including **WPA3-SAE, WPA-EAP, OWE, and MAC filtering**, providing a high level of network protection. The ability to hide SSIDs and isolate clients allows for better access control. **Management via WebUI and SNMP interface** provides easy configuration and monitoring.



Easy setup and management

The device can be **remotely managed and monitored via Teltonika RMS**, providing full control over the network. Support for **protocols such as SSH, MQTT and DHCP** allows integration with various network systems. **An intuitive user interface (WebUI)** allows for quick configuration and customization.

