



Teltonika DAP142 | Access point | Wi-Fi 4, passive PoE, 2x RJ45 100Mb/s



link to the product:

<https://www.batna24.com/gb/p/access-points/teltonika-dap142-access-point-wi-fi-4-passive-poe-2x-rj45-100mb-s>

Price: **276.48 zł** gross / 224.78 zł net



Manufacturer: TELTONIKA

Referention number: DNXXGHINKFRMLPP

Product features


Height	25 mm
Antenna type	External
LED indicators	Power
Width	113.1 mm
Depth	68.6 mm
Security algorithms	OWE
Maximum data transfer rate	300 Mb/s
IPv4 & IPv6 features	Dual stack IPv4/IPv6
Ethernet LAN (RJ-45) ports	2
RS-232 interface	Yes
Cabling technology	10/100Base-T(X)
Reset button	Yes
International Protection (IP) code	IP30
Power over Ethernet (PoE)	Yes
Placement	Pole
Power over Ethernet (PoE) type supported	Passive PoE
Product colour	Black
Antenna connector type	RP-SMA
DHCP client	Yes
DHCP server	Yes
Watch case material	Aluminium
6 GHz	No

5 GHz	No
2.4 GHz	Yes
Product weight	150 g

Full product description

Teltonika DAP142 - Wi-Fi Access Point 4 with Passive PoE

Ensure a stable and fast network connection in your office, warehouse or other industrial facility. The Teltonika DAP142 is a Wi-Fi 4 access point that allows you to effectively manage your network and extend your wireless coverage. With Passive PoE power and two 100 Mbps RJ45 ports, the device is great for a variety of applications.

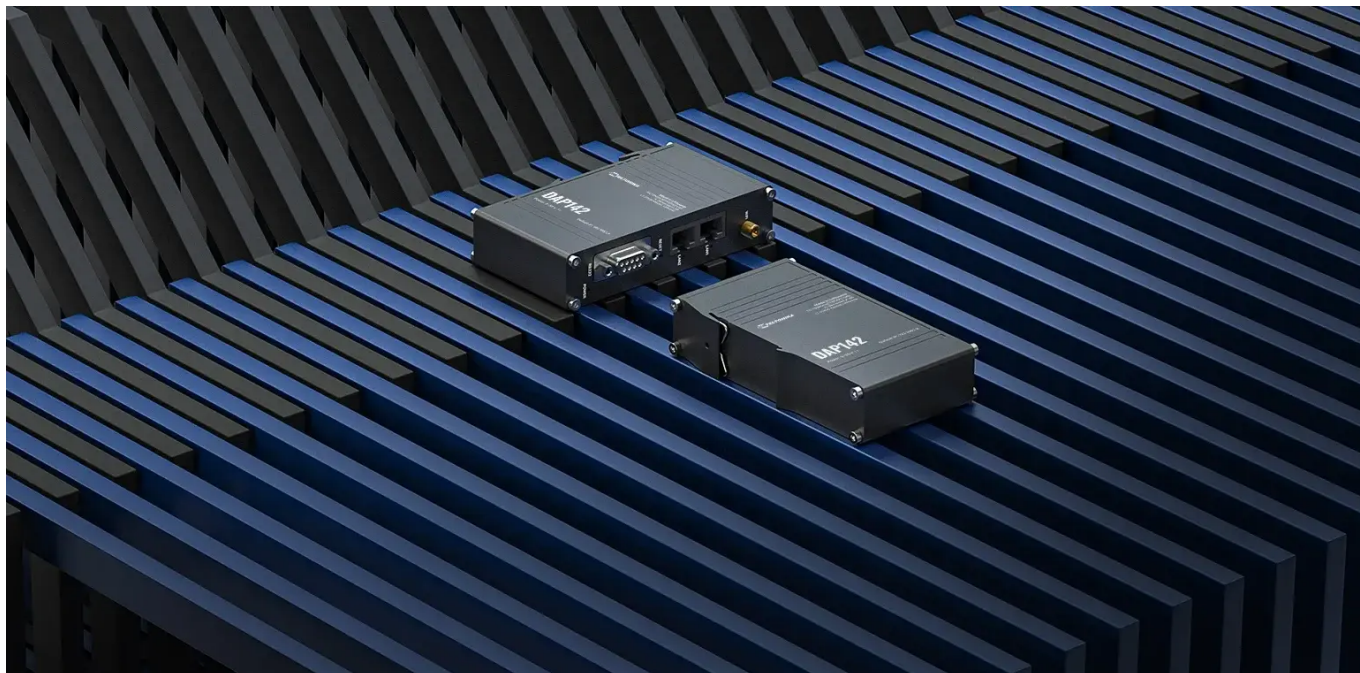

Stable wireless connection

The Teltonika DAP142 supports **Wi-Fi 4 (IEEE 802.11b/g/n)** for smooth data transfer and stable network connection. The device can support **up to 50 simultaneous users**, making it ideal for offices, production halls or service facilities. In addition, **the built-in bandwidth management system** improves the quality of the connection, even with a larger number of connected devices.



Two RJ45 ports and Passive PoE

The DAP142 is equipped with **two RJ45 (100 Mbps) LAN ports**, allowing other devices to be wired into the network. With **Passive PoE support**, the device can be powered without the need for an additional power supply, simplifying installation. This configuration makes **the access point** ideal for locations where space saving and installation convenience are key.



Advanced security features

The device supports a **wide range of security protocols**, including **WPA-PSK, WPA2-PSK, WPA3-SAE and WPA-EAP**, allowing for effective network protection. In addition, **MAC address filtering mechanisms** allow selective network access for specific devices. The option to **generate QR codes** for easy login makes managing network access even simpler.



Easy setup and management

The DAP142 allows for **quick configuration** through an **intuitive WebUI interface**. The ability to integrate with Teltonika RMS facilitates remote management and monitoring of the device. In addition, support for **protocols such as SSH, SNMP and MQTT** provides extensive integration with other network systems.

