



Tenda TEF1118P-16-150W | Switch | 10/100MBPS PoE, 2x 10/100/1000MBPS, 1x SFP, 150 W



link to the product:

<https://www.batna24.com/gb/p/switches/tenda-tef1118p-16-150w-switch-10-100mbps-poe-2x-10-100-1000mbps-1x-sfp-150-w>

Price: **625.82 zł** gross / 508.80 zł net

Tenda[®]


Manufacturer: TENDA

Referention number: DNXGFQIPMRMNL

Full product description

PoE switch TEF118P

The Tenda TEF1118P is an unmanaged **PoE switch with 16 10/100 Mbps ports** compliant with IEEE 802.3af and IEEE 802.3at with PoE support. The switch can intelligently identify devices, with a maximum PoE output of 150 W and 30 W per port, and can deliver power while transferring data via access points, IP cameras and IP phones. **The switch supports 4 operating modes, including Standard, Priority, Enhanced and VLAN**, and has 6kV surge protection. TEF1118P has been designed for small and medium businesses and households.

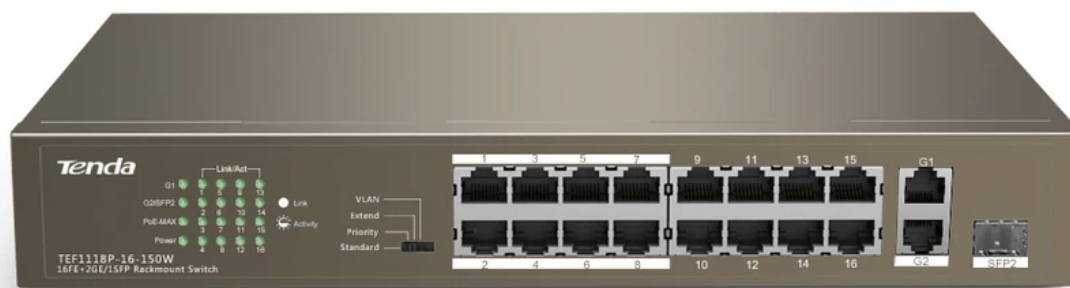


SFP port

The switch has been equipped with one SFP 10/100/1000 Mbps port, so that the switch can meet the current demand for Gigabit WLAN capacity and digital HD monitoring. The switch supports maximum transmission distance up to 20 km, in cooperation with Tenda TEG311SM fiber optic module.



Cascading with 6 devices can support up to 96 IP cameras

In the number of about 100 terminals available in the network, cascading 6 devices through G1, G2 / SFP2 can reach up to 96 monitoring channels. It supports 300/500W and provides stable video transmission without interruption. If both ends of the devices are connected to the NVR, video can be viewed locally.

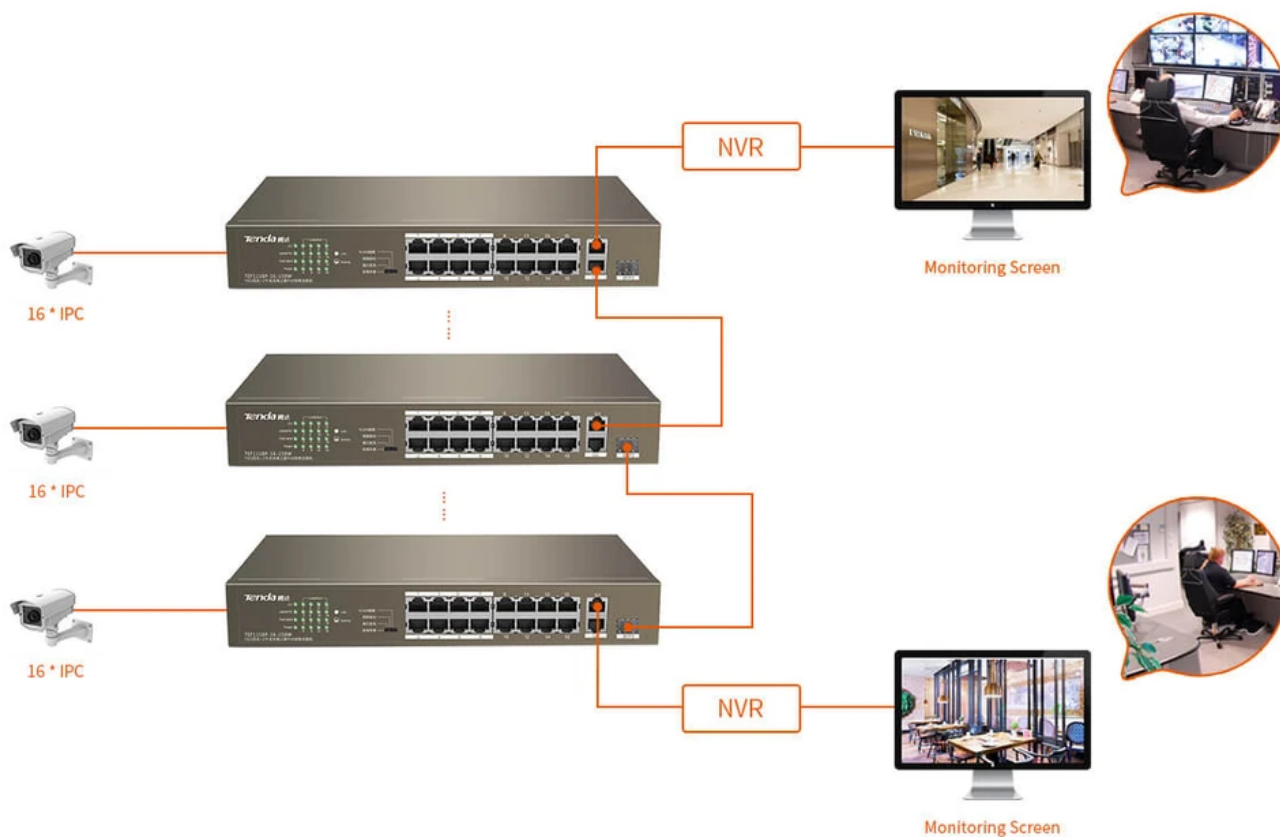

Many modes of operation

The Tenda TEF1118P-16-150W includes a selection of one of four modes: CCTV / Standard / VLAN / Extend.

- CCTV mode - Ports 1 to 8 support QoS, it is recommended to use these ports.
- Standard mode - In this mode the switch works as a classic device, all ports have auto-negative.

- VLAN mode - in this mode VLANs are active on each PoE port.
- Extended mode - PoE port speed from 1 to 8 is 10 mbps, autonegation is active and range to end device is increased to 250 m



Cicha konstrukcja bez wentylatora



Wykonany w całości ze stali i
trójstronna wentylacja



Konstrukcja rack 13"



Plug & Play