



Totolink S505 | Switch | 5x RJ45 100Mb/s, Desktop



link to the product:

<https://www.batna24.com/gb/p/switches/totolink-s505-switch-5x-rj45-100mb-s-desktop>


Price: **47.99 zł** gross / 39.02 zł net

Manufacturer: TOTOLINK



The Smartest Network Device

Referention number: DNXELLSMRMNI

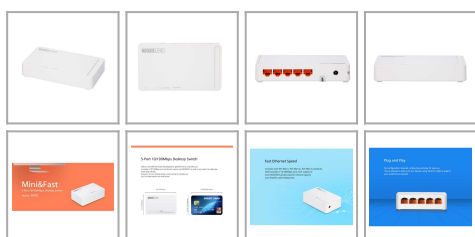

Product features

Storage relative humidity (H-H)	5 – 95%
Power source	AC/DC
Height	24 mm
Input voltage	9 V
LED indicators	Activity
Wall mountable	Yes
Width	75 mm
Depth	132 mm
Auto-negotiation	Yes
Input current	0.5 A
Storage temperature (T-T)	-20 to 70 °C
Cables included	DC
Rack mounting	No
Humidity measurement range	10 – 90%
Switching capacity	0.6 Gb/s
Networking standards	IEEE 802.3
Switch type	Unmanaged
10G support	No
Full duplex	Yes
MAC address auto-learning supported	Yes
MAC address auto-aging supported	Yes
IFU / User manual	Yes

Auto MDI/MDI-X	Yes
DC input voltage	9 V
Plug and Play	Yes
Operating temperature (T-T)	0 – 60 °C
Package type	Box
MAC address table	1000 entries
Power supply included	Yes
Power over Ethernet (PoE)	No
AC input frequency	50 Hz
AC input voltage	100 V
Fast Ethernet (copper) ports quantity	5
Cable types supported	Cat5
Store-and-forward	Yes
Product colour	White
Power connector	DC-in jack
Switch layer	L2+
Basic switching RJ-45 Ethernet ports type	Fast Ethernet (10/100)
Watch case material	Plastic
Basic switching RJ-45 Ethernet ports quantity	5
Stackable	No

Full product description


Totolink S505 - 5-port 10/100 Mbps switch

Totolink S505 is a five-port, unmanaged switch. It is equipped with five 10/100 Mbps ports, with Auto MDI/MDIX support on each port. This switch eliminates the need for crossover cables or uplink ports. It transfers and filters packets at full cable speed. Each port can be used as a general port or uplink port. Of course it can also be connected to a server, hub or switch using an Ethernet or crossover cable.



Features:

- Supports IEEE 802.3x, with flow control for full duplex mode, is backwards compatible with half duplex mode
- Supports MAC address autolearning and autoaging
- Plastic housing, wall mountable
- LEDs to monitor power, link status and activity
- Powered by a power supply
- Ease of operation and configuration

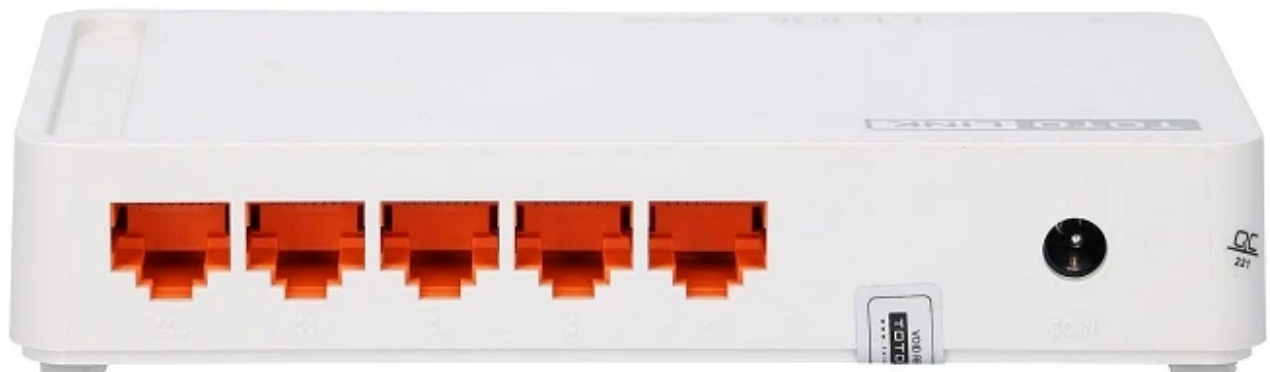


High performance and small size

The switch is compliant with **IEEE 802.3**, **IEEE 802.3u**, **IEEE 802.3x** standards and is equipped with five 10/100 Mbps RJ45 ports, which have an automatic reconciliation function with LED controls to monitor link status and activity. The auto MDI/ MDIX function on all ports helps to recognize if the connection requires a crossover or straight cable. In addition, the ports can detect the network speed and autonegotiate the network between 10BaseT and 100BaseTX to ensure the maximum possible speed for each device connected to the network. Thanks to its miniature design, the S505 is space-saving and easy to carry.



Easy to use and plug and play option

The switch is easy to use, even for people who do not have technical knowledge about network devices. Just plug in the cable to expand your wired network at home. With a simple Ethernet cable, you can add up to four devices without additional configuration.

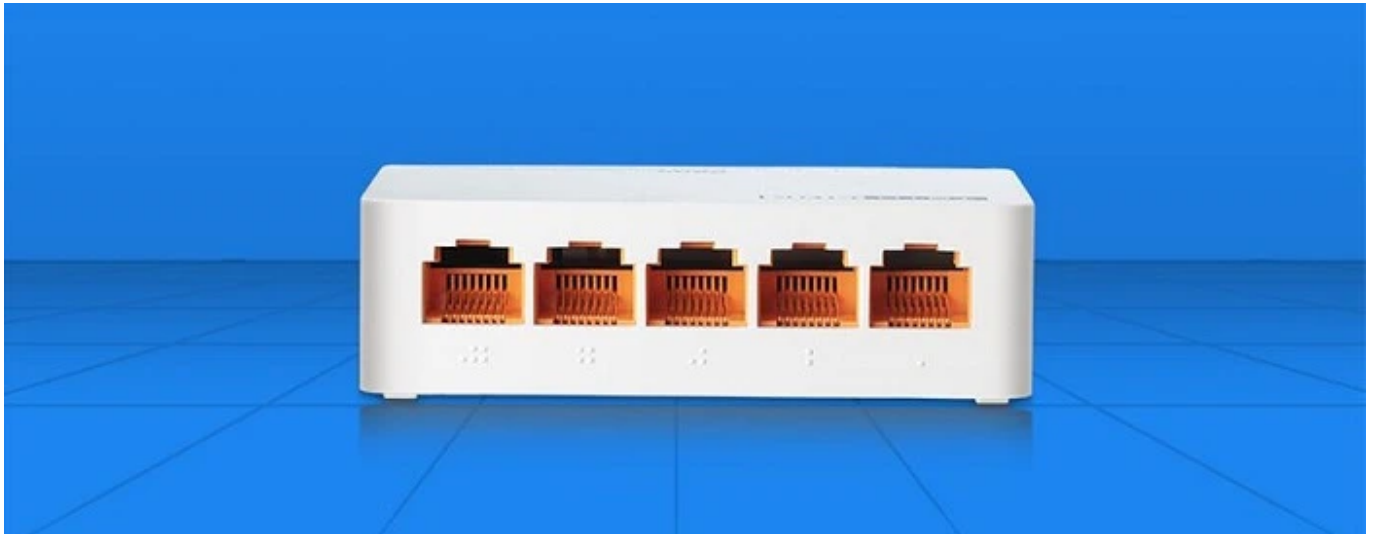

High-speed Ethernet connection

Compliant with IEEE 802.3, IEEE 802.3u, IEEE 802.3x, S505 offers 5 10/100 Mbps ports with Auto-MDI/MDIX support, which significantly increases network throughput and simplifies cable placement.

