



Totolink S505-V5 | Switch | 5x RJ45 100Mb/s, Desktop



link to the product:

<https://www.batna24.com/gb/p/switches/totolink-s505-v5-switch-5x-rj45-100mb-s-desktop>

Price: **29.02 zł** gross / 23.59 zł net

Manufacturer: TOTOLINK



Referention number: DNXGGJKKJRMHL

Product features

Storage relative humidity (H-H)	5 - 95%
Power source	AC/DC
Height	25 mm
Input voltage	5 V
LED indicators	Activity
Wall mountable	Yes
Width	54 mm
Depth	84 mm
Auto-negotiation	Yes
Input current	0.6 A
Storage temperature (T-T)	-40 to 70 °C
Cables included	DC
Rack mounting	No
Power consumption (typical)	3 W
Humidity measurement range	5 - 95%
Switching capacity	1 Gb/s
Networking standards	IEEE 802.3
Switch type	Unmanaged
10G support	No
Full duplex	Yes
IFU / User manual	Yes
Auto MDI/MDI-X	Yes

DC input voltage	5 V
Plug and Play	Yes
Operating temperature (T-T)	0 – 50 °C
Package type	Box
MAC address table	1000 entries
Power supply included	Yes
Power over Ethernet (PoE)	No
AC input frequency	50 Hz
AC input voltage	100 V
Fast Ethernet (copper) ports quantity	5
Cable types supported	Cat3
Store-and-forward	Yes
Copper ethernet cabling technology	100BASE-TX
Product colour	White
Power connector	DC-in jack
Basic switching RJ-45 Ethernet ports type	Fast Ethernet (10/100)
Watch case material	Plastic
Basic switching RJ-45 Ethernet ports quantity	5
Stackable	No

Full product description


Totolink S505, which is a 5-port 10/100Mbps switch

The **S505** is a 5-port unmanaged switch. Equipped with 5 10/100Mbps switch ports with Auto MDI / MDIX support on each port, the switch can eliminate the need for patch cables or uplink ports. It can forward and filter packets at full cable speed. Each port can be used as a general port or an uplink port. What's more, it can also simply be connected to a server, hub or switch using an Ethernet cable or crossover cable.



Features:

- Supports IEEE 802.3x flow control for full duplex mode and is backward compatible with half duplex mode
- Supports autolearning and autoaging of MAC addresses
- Plastic housing, can be mounted to the wall
- LED lights for power, link status and activity monitoring
- Powered by a power supply
- Ease of use and configuration

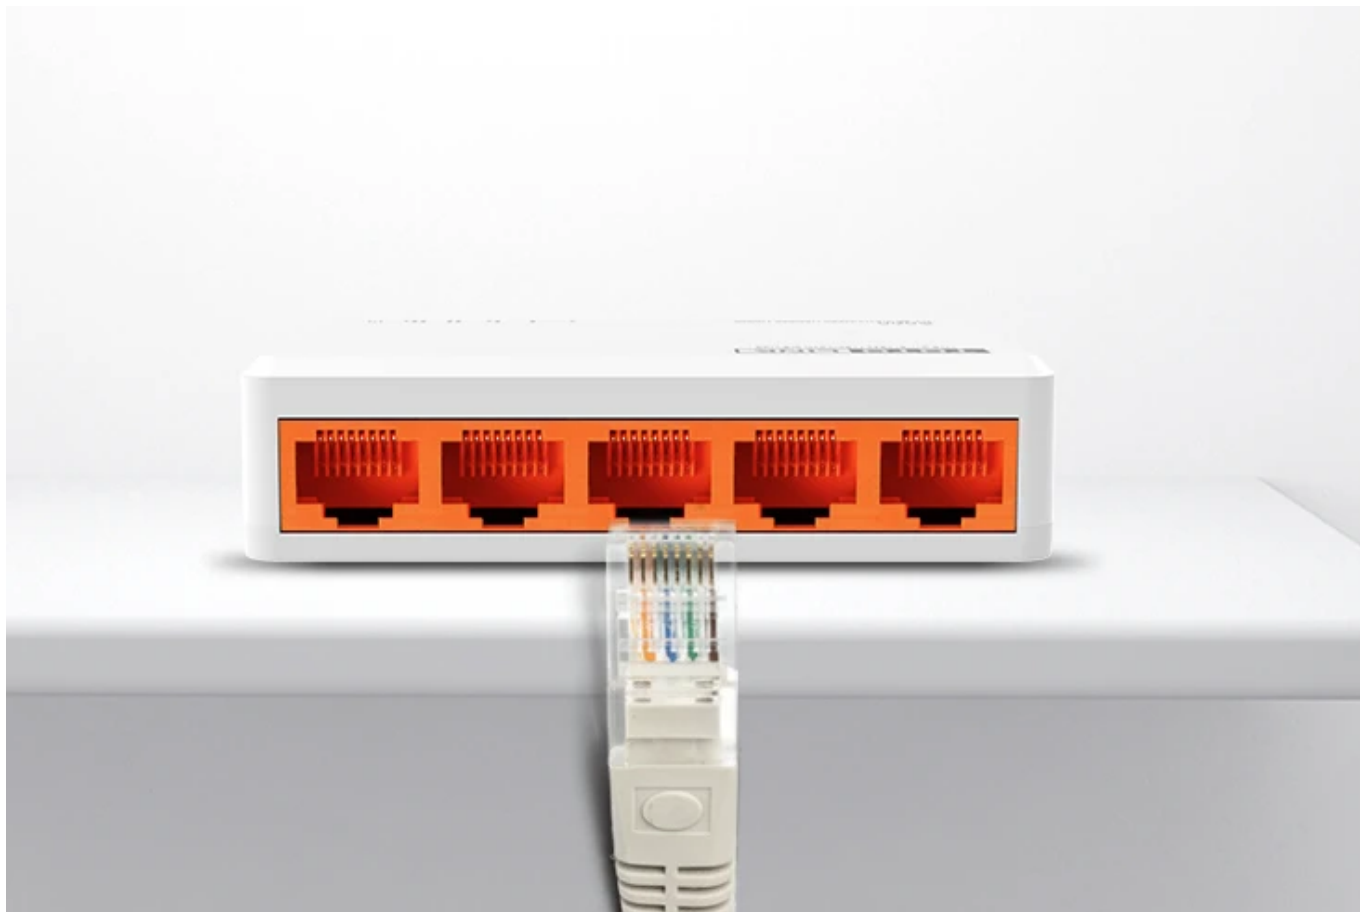


High performance and small size

The switch complies with IEEE 802.3, IEEE 802.3u, IEEE 802.3x standards, and has 5 10/100Mbps RJ45 ports having auto reconciliation with LED lights to monitor link status and activity. The auto MDI / MDIX function on all ports helps identify whether the connection requires a crossover cable or a straight cable. Besides, the ports can detect the network speed and auto-negotiate the network between 10BaseT and 100BaseTX to ensure the maximum possible speed for each device connected to the network. Moreover, thanks to its miniature design, the device can be easily carried. The S505 will fit anywhere.



Easy to use and plug and play option

The switch is easy for anyone to use, even for people who have no technical knowledge of network equipment. Just plug in the cable, it is convenient for expanding a wired network at home. You can add up to four devices with a simple Ethernet cable without additional configuration. No configuration is required, just plug and play to use the device. You can add up to four devices with an Ethernet cable to expand your wired network.

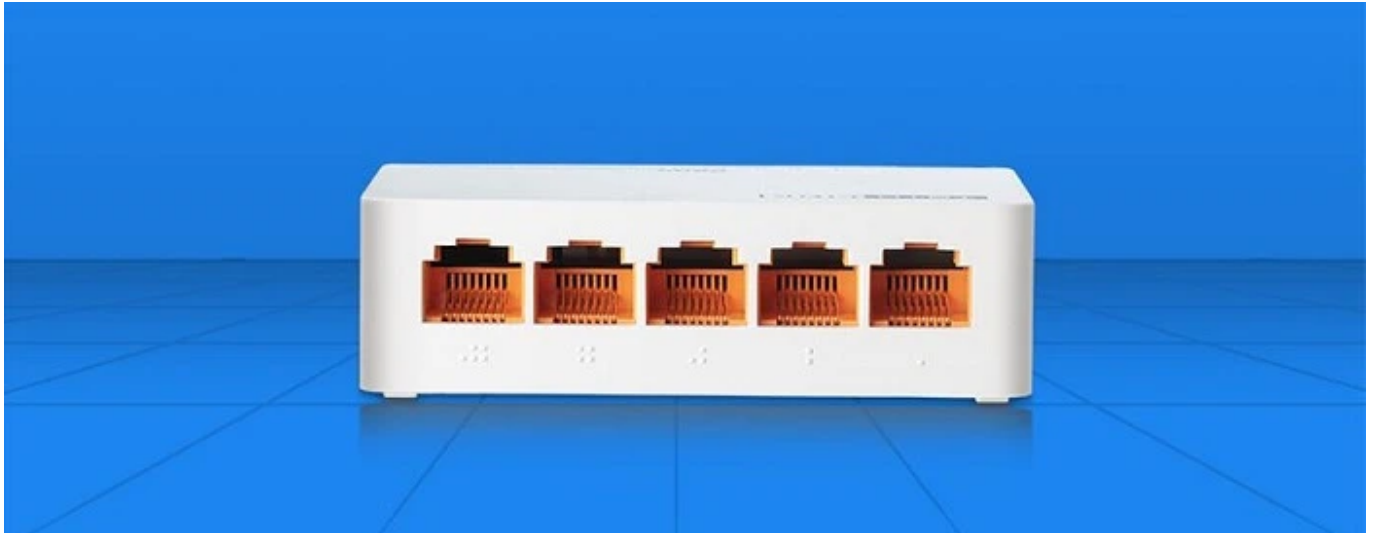

High Speed Ethernet Link

Compliant with IEEE 802.3, IEEE 802.3u, IEEE 802.3x standards, the S505 offers 5 10/100 Mbps ports with Auto-MDI/MDIX support, greatly increasing network throughput and simplifying cable deployment.

