



TP-Link CPE210 | Access point | MIMO, N300, 1x RJ45 100Mb/s, 9dBi



link to the product:

<https://www.batna24.com/gb/p/radio-lines/tp-link-cpe210-access-point-mimo-n300-1x-rj45-100mb-s-9dbi>

Price: **189.28 zł** gross / 153.89 zł net



Manufacturer: TP-LINK

Referention number: DNXEDKPPFRMMJN

Product features

Regulatory Approvals	CE/FCC/UL/IC/GS/PSB/C-tick/SAA/S-Mark/KC-mark CE, FCC, RoHS
Storage relative humidity (H-H)	5 - 95%
Manageability features	Pharos Control
Height	60 mm
Output voltage	24 V
Antenna type	Internal
LED indicators	Status
Universal Plug and Play (UPnP)	Yes
Width	224 mm
Depth	79 mm
Security algorithms	AES
Auto Wireless Distribution System (WDS)	Yes
Mounting kit	Yes
Storage temperature (T-T)	-40 - 70 °C
Cables included	AC
Maximum data transfer rate	300 Mb/s
Package weight	760 g
Humidity measurement range	10 - 90%
Networking standards	IEEE 802.11b
Ethernet LAN (RJ-45) ports	2

Antenna gain level (max)	9 gain
Flash memory	8 MB
DC-in jack	Yes
Operating temperature (T-T)	-30 - 70 °C
Package depth	270 mm
Package height	106 mm
Package width	132 mm
VLAN support	Yes
Reset button	Yes
Firmware upgradeable	Yes
IGMP snooping	Yes
Processor frequency	560 MHz
Web-based management	Yes
Service Set Identifier (SSID) features	SSID broadcast
Dynamic Frequency Selection (DFS)	Yes
Maximum outdoor range	5000 m
Output current	0.25 A
International Protection (IP) code	IPX5
Power over Ethernet (PoE)	Yes
MIMO	Yes
Internal memory	64 MB
Placement	Pole
AC input frequency	50 Hz
AC input voltage	100 V
Wireless isolation	Yes
Processor architecture	MIPS 74Kc
Processor model	Qualcomm Atheros
Built-in processor	Yes
Power over Ethernet (PoE) type supported	Passive PoE
Antenna direction type	Directional
Product colour	White
MAC address filtering	Yes
Automatic channel selection	Yes
Polarization	Dual polarization
Automatic channel scanning	Yes
6 GHz	No
5 GHz	No
2.4 GHz	Yes

Full product description


TP-Link CPE210 - strong antennas for long-distance transmissions

Access point from TP-Link **CPE** operates in 2.4 GHz band, achieving data transfer speeds up to 300 Mbps. **TP-Link CPE210** has been designed to provide effective solution for external wireless networks. With its central management system, it is ideal for point-to-point and point-to-multipoint wireless connections. **Access point** The CPE210 is a great choice for both business and home clients - wherever you need to receive a signal from a distance.





Advanced antenna system and TP-Link MAXtream TDMA technology

Designed for outdoor applications, the CPE210 has antennas with **profit 9 dBi**, which allow to increase transmission range and reduce signal interference. Thanks to this, the device provides wireless transmission over long distances, even those whose distance exceeds **5 km**. To prevent collisions at such long distances between CPE and other transmitters, the product uses **TP-Link MAXtream TDMA** technology, which effectively prevents network bandwidth reduction.

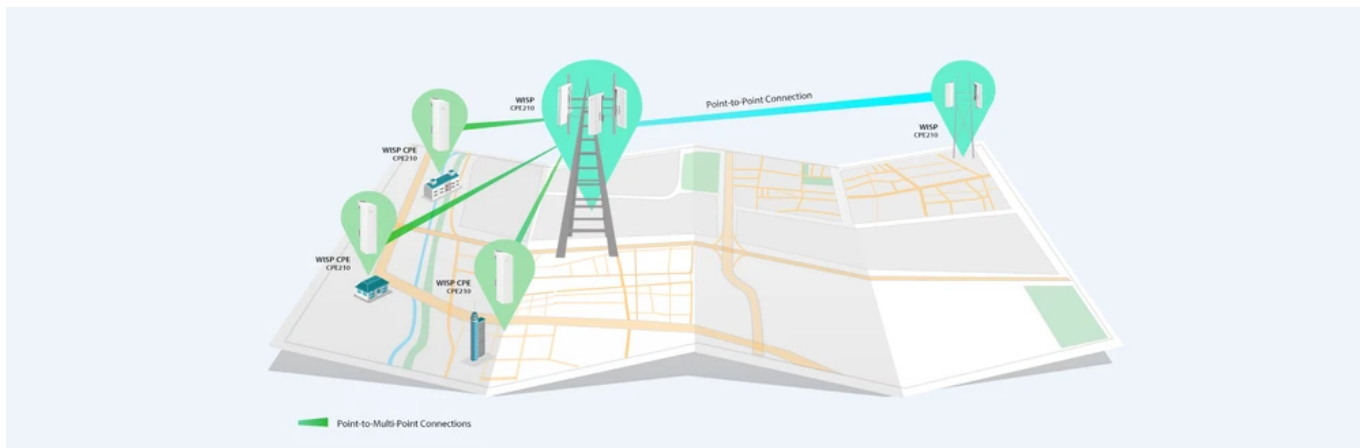

Central management system

A convenience for CPE210 is **Pharos Control**. This software allows for central management of all devices in the network from one computer. With **Pharos Control**, activities such as **detection of devices**, **status monitoring**, **software update** and **network management** can be handled.

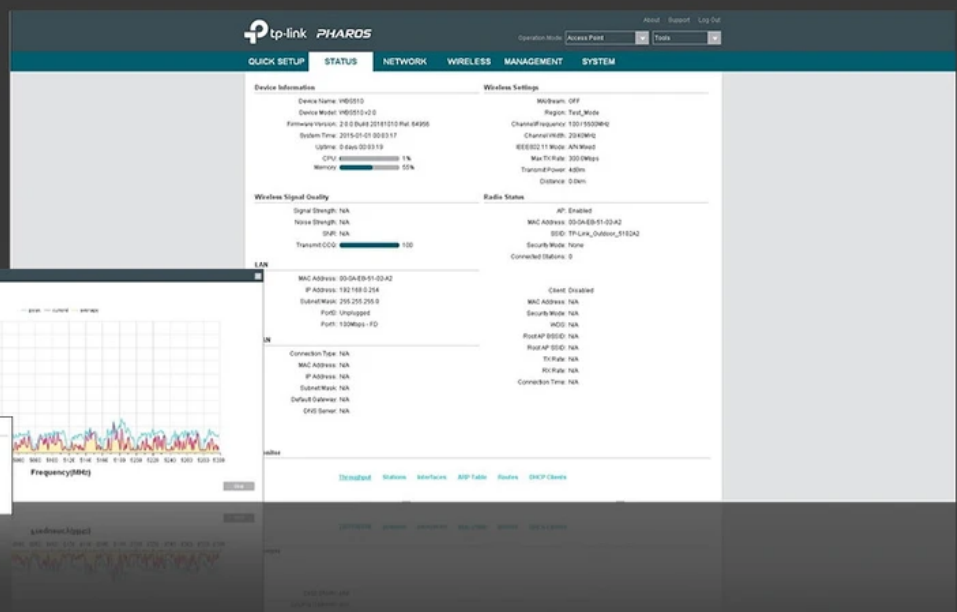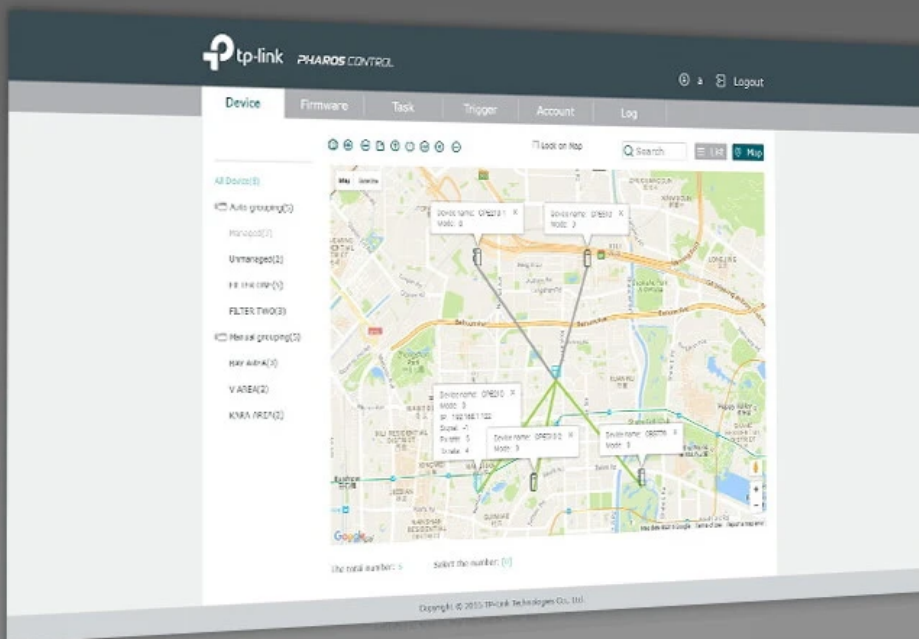

External CPE210 9 dBi, 2.4 GHz, 300 Mbps

