



TP-Link EAP115 | Access point | N300, 1x RJ45 100Mb/s



link to the product:

<https://www.batna24.com/gb/p/access-points/tp-link-eap115-access-point-n300-1x-rj45-100mb-s>

Price: **127.82 zł** gross / 103.92 zł net



Manufacturer: TP-LINK

Referention number: DNXFMJPQJRMNIK

Product features

Regulatory Approvals	CE, FCC, RoHS
Storage relative humidity (H-H)	5 - 90%
Cable lock slot type	Kensington
Height	47.5 mm
Output voltage	12 V
Antenna type	Internal
LED indicators	Yes
Receiver sensitivity	300M: -71dBm@10% PER 150M: -75dBm@10% PER 54M: -78dBm@10% PER 11M: -93dBm@8% PER 6M: -92dBm@10% PER 1M: -96dBm@8% PER
WAN connection	Ethernet (RJ-45)
Width	180 mm
Depth	180 mm
Security algorithms	128-bit WEP
Virtual LAN features	VLAN mapping
Wi-Fi Multimedia (WMM)/(WME)	Yes
Mounting kit	Yes
Storage temperature (T-T)	-40 - 70 °C
Syslog	Yes
Compliance certificates	CE
Maximum data transfer rate	300 Mb/s
Rate limiting	Yes
Package weight	600 g

Power consumption (typical)	5 W
Humidity measurement range	10 - 90%
Harmonized System (HS) code	85176990
Quick start guide	Yes
Networking standards	IEEE 802.11b
Ethernet LAN (RJ-45) ports	1
Antenna gain level (max)	3 gain
Operating temperature (T-T)	0 - 40 °C
Package depth	268 mm
Package height	69 mm
Package width	246 mm
Cabling technology	10/100Base-T(X)
Quality of Service (QoS) support	Yes
VLAN support	Yes
Reset button	Yes
Minimum system requirements	Microsoft Windows 10/8/7/Vista/XP
System status alarm	Yes
Cable lock slot	Yes
Web-based management	Yes
Service Set Identifier (SSID) features	Multiple SSIDs
On/off switch	Yes
Output current	1 A
Power over Ethernet (PoE)	Yes
PoE adapter included	Yes
Placement	Ceiling
Wireless isolation	Yes
Power over Ethernet (PoE) type supported	Passive PoE
Antennas quantity	2
Number of SSID supported	8
Antenna direction type	Omni-directional
Antenna features	Integrated antenna
Product colour	White
Access Control List (ACL)	Yes
MAC address filtering	Yes
Automatic channel selection	Yes
Maximum data transfer rate (2.4 GHz)	300
6 GHz	No
5 GHz	No
2.4 GHz	Yes
Sustainability compliance	Yes

Full product description


TP-Link EAP 115 - wireless, wall-mounted access point

TP-Link EAP115 is a wall mounted access point. It was designed for the convenience of both business and home users. Simplified configuration and automatic radio band management make it easy to use in various network environments. Thanks to **PoE** support, installation of the device does not require much effort and allows for **fast and convenient installation, without the need for additional cables**. Convenience and ease of installation are the advantages of this access point. EAP115 access point is a solution dedicated for business networks, hotels, university campuses, hospitals.




Convenient identification of guests

Authentication of wireless users via the **welcome page** is extremely convenient. This method requires the Client to perform appropriate actions, such as **approving the terms of use**, providing a **SMS code** or **logging into the system** in order to gain access to the network. All these actions are then checked by the appropriate server or network administrator database.

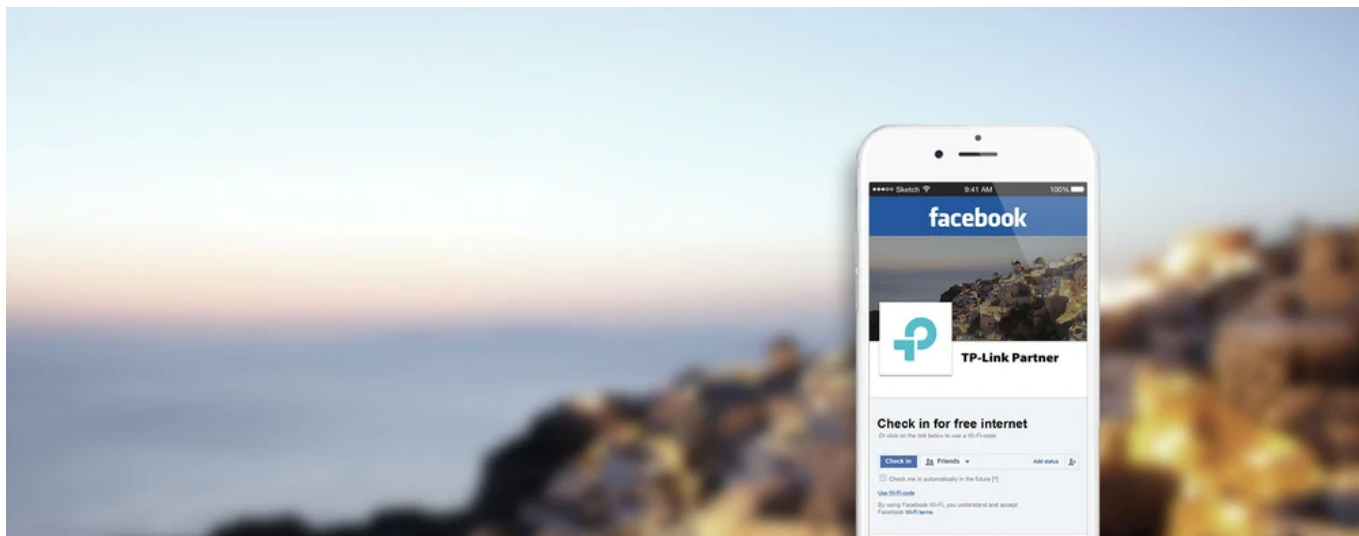

One network for multiple users

Omada business devices are designed to meet the requirements of large numbers of users in larger areas. They work without the problems sometimes caused by home routers, such as link instability. EAP access points are an excellent solution for **hotels, shops, schools** and **restaurants**.

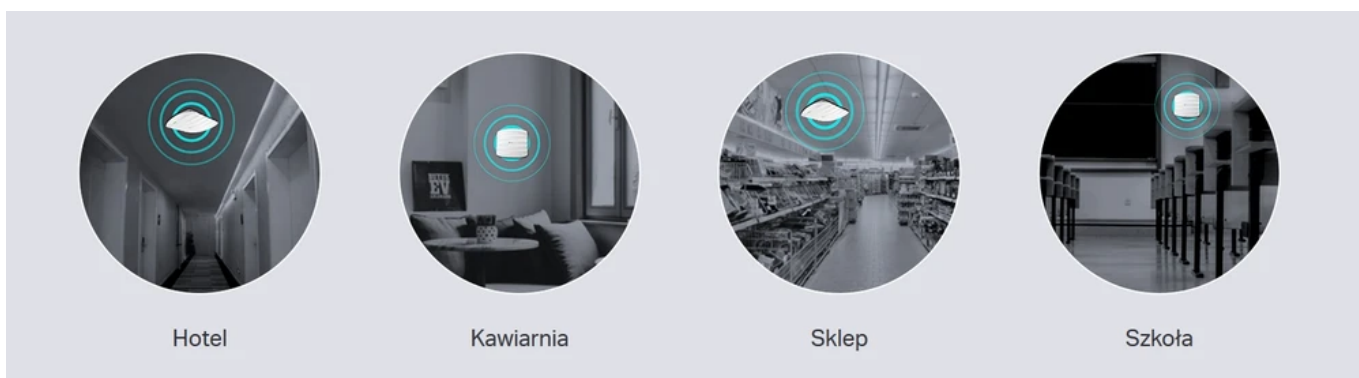

Wireless access point with ceiling mounting option TP-Link EAP115

- The management program allows for central management of the wireless network
- Device configuration from the administrator level
- Multi-SSID to create a subnet for different users
- Business-class security to protect your Wi-Fi network against attacks
- Support for PoE power supply
- Innovative design to suit any room
- Easy wall or ceiling mounting

