



TP-Link EAP230-Wall | Access point | MU-MIMO, AC1200, Dual Band, 2x RJ45 1000Mb/s, Wall mounted



link to the product:

<https://www.batna24.com/gb/p/access-points/tp-link-eap230-wall-access-point-mu-mimo-ac1200-dual-band-2x-rj45-1000mb-s-wall-mounted>

Price: **319.86 zł** gross / 260.05 zł net



Manufacturer: TP-LINK

Referention number: DNXXGGHIRHRMMIN

Product features

Storage relative humidity (H-H)	5 - 90%
Height	30.2 mm
Antenna type	Internal
LED indicators	Operation
WAN connection	Ethernet (RJ-45)
Width	86.8 mm
Depth	86.8 mm
Security algorithms	128-bit WEP
BeamForming	Yes
Virtual LAN features	Port-based VLAN
Wi-Fi Multimedia (WMM)/(WME)	Yes
Mounting kit	Yes
Storage temperature (T-T)	-40 - 70 °C
Syslog	Yes
Compliance certificates	CE
Maximum data transfer rate	1167 Mb/s
Power consumption (max)	25.5 W
Rate limiting	Yes
Package weight	210 g
Power consumption (typical)	9 W
Humidity measurement range	10 - 90%
Harmonized System (HS) code	85176990

Quick start guide	Yes
Networking standards	IEEE 802.11ac
Ethernet LAN (RJ-45) ports	1
Antenna gain level (max)	3.6 gain
Operating temperature (T-T)	0 - 40 °C
Package depth	130 mm
Package height	47 mm
Package width	118 mm
Cabling technology	10/100/1000Base-T(X)
Quality of Service (QoS) support	Yes
VLAN support	Yes
Reset button	Yes
Band steering	Yes
Web-based management	Yes
Service Set Identifier (SSID) features	Multiple SSIDs
Power over Ethernet (PoE)	Yes
MIMO type	Multi User MIMO
MIMO	Yes
Placement	Wall
Antennas quantity	2
Number of SSID supported	16
Antenna features	Integrated antenna
Product colour	White
Access Control List (ACL)	Yes
MAC address filtering	Yes
Automatic channel selection	Yes
Automatic channel scanning	Yes
Maximum data transfer rate (5 GHz)	867 Mb/s
Maximum data transfer rate (2.4 GHz)	300
6 GHz	No
5 GHz	Yes
2.4 GHz	Yes
Operating system	Microsoft Windows XP, Vista, Windows 7, Windows 8, Windows10
Sustainability compliance	Yes

Full product description

Omada AC1200 MU-MIMO Gigabit Wall Mounted Wireless Access Point

The EAP230-WALL is designed to meet all networking needs in environments with many separate rooms, such as hotels, offices and dormitories. **The device in each room provides a sophisticated, high-speed WI-FI connection for every user.**



Zadziwiająco cienka obudowa o grubości 11 mm


Omada EAP230-Wall
Punkt dostępowy AC

 Dwa pasma sieci
Multi-User MIMO

 Zgodność z
802.3af/802.3at PoE

MU-MIMO + Dual-Band: faster connection for more devices

802.11lac Wave technology enables multiple users to access the Internet simultaneously. Speeds up to 1200 Mbps **and 2.4GHz and 5GHz** wireless bands provide simultaneous high-speed Internet access for multiple devices.

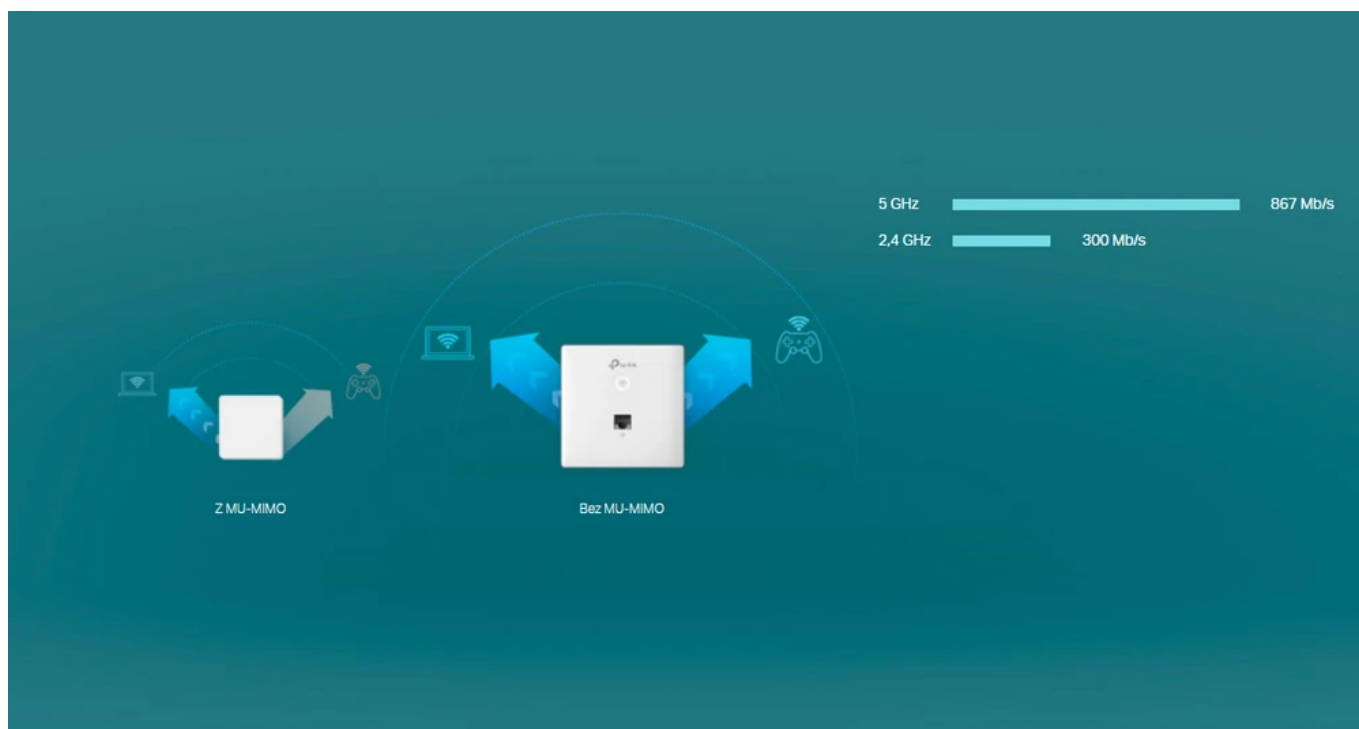

Versatile design that blends in with any decor

The size and shape of the **EAP230-WALL** is reminiscent of a light switch or power socket, so that it fits perfectly into any room.




High speed gigabit port

The AP is equipped with a **Gigabit port** for the fastest possible wired transmission.



Hassle-free deployment with Power over Ethernet

PoE 802.3af / 802.3at support allows the device to operate without additional cabling. Connect existing Ethernet cables to transmit both power and Internet to the access point.

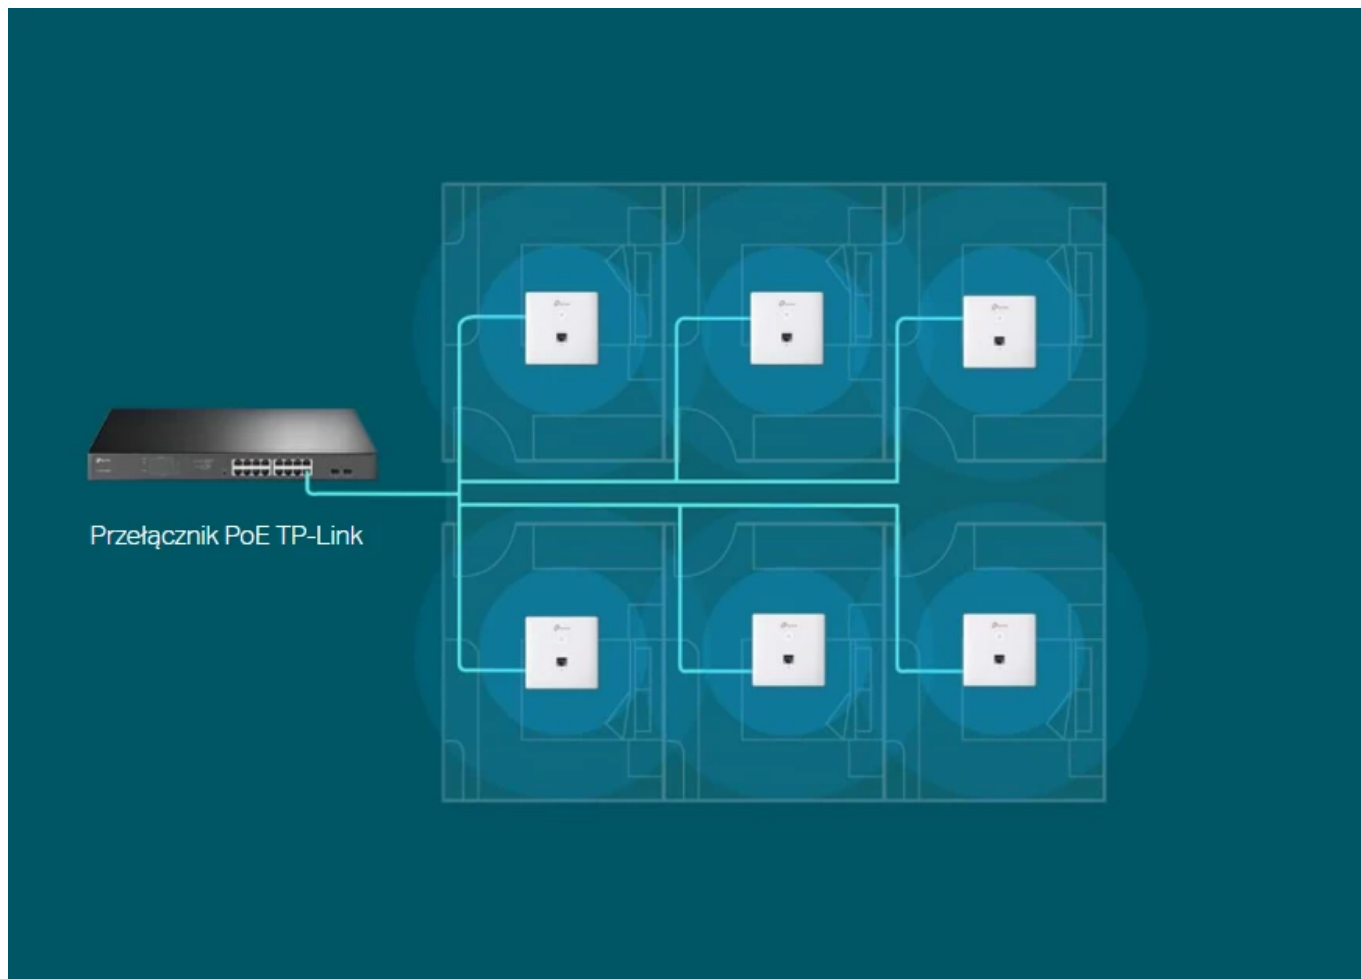

Omada SDN - a smarter cloud solution for business networks

Omada 's **Software Defined Networking (SDN)** platform integrates network devices, including access points, switches and gateways. Guaranteeing a powerful business network with higher performance, higher security and higher reliability.



Special features

- High-speed dual-band Wi-Fi.

- Gigabit ports.
- Omada SDN integrated device.
- Centralized management.
- Private connection for each room.
- Elegant design.
- Easy installation and PoE support.
- Secure network for guests.