



TP-Link TL-SF1008LP | Switch | 8x RJ45 100Mb/s, 4x PoE



link to the product:

<https://www.batna24.com/gb/p/switches/tp-link-tl-sf1008lp-switch-8x-rj45-100mb-s-4x-poe>

Price: **208.89 zł** gross / 169.83 zł net



Manufacturer: TP-LINK

Referention number: DNXGGHJMFRMLNM

Product features


Storage relative humidity (H-H)	5 - 90%
Power source	DC/PoE
Height	27 mm
LED indicators	Yes
Routing protocols	OSPF
Bandwidth	1.6 Gb/s
Wall mountable	Yes
Width	171 mm
Depth	98 mm
Auto-negotiation	Yes
Input current	0.81 A
Storage temperature (T-T)	-40 to 70 °C
Cables included	AC
Rack mounting	No
Compliance certificates	CE
Fanless	Yes
Power consumption (max)	47.1 W
IPv4 & IPv6 features	IPv6 portal
Package weight	750 g
Humidity measurement range	10 - 90%
Harmonized System (HS) code	85176990
Switching capacity	1.6 Gb/s

Networking standards	IEEE 802.3af
Switch type	Unmanaged
10G support	No
Full duplex	Yes
MAC address auto-learning supported	Yes
MAC address auto-aging supported	Yes
Auto MDI/MDI-X	Yes
Operating temperature (T-T)	0 – 40 °C
Package depth	280 mm
Package height	68 mm
Heat dissipation	160.61 British thermal unit per hour
AC adapter included	Yes
Package width	223 mm
Total Power over Ethernet (PoE) budget	41 W
User guide	Yes
Half duplex	Yes
Flow control support	Yes
Jumbo frames	2000
Jumbo frames support	Yes
MAC address table	2000 entries
Power supply included	No
Power over Ethernet (PoE) ports quantity	4
Power over Ethernet (PoE)	Yes
AC input frequency	50 Hz
AC input voltage	220 V
Fast Ethernet (copper) ports quantity	8
DHCP features	DHCPv6 relay
Store-and-forward	Yes
Copper ethernet cabling technology	100BASE-TX
Product colour	Black
Power connector	DC-in jack
Basic switching RJ-45 Ethernet ports type	Fast Ethernet (10/100)
Watch case material	Metal
Basic switching RJ-45 Ethernet ports quantity	8
Stackable	No
Sustainability compliance	Yes

Full product description

Fast Ethernet professional switch with four PoE ports

802.1af PoE compliance provides up to 15.4W per PoE port. The total PoE power budget is **41W** for 4 ports, giving the switch a wide range of applications, from office monitoring, dormitories and small businesses. The device is fully compatible with IP cameras, access points, IP phones, computers and printers.

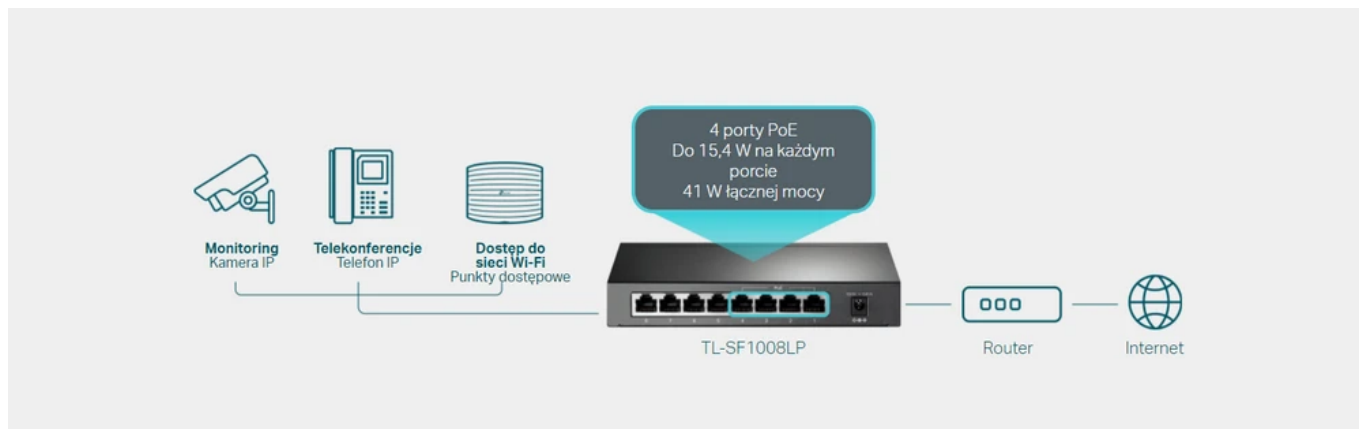


Ideal for surveillance

In extended range mode, PoE transmission reaches up to 250m, making the switch ideal for IP camera sensing over large areas.




Priority video - quality guaranteed

Quality assurance for sensitive applications, such as video monitoring in critical business areas, is guaranteed by offering higher priority options for ports 1-2.

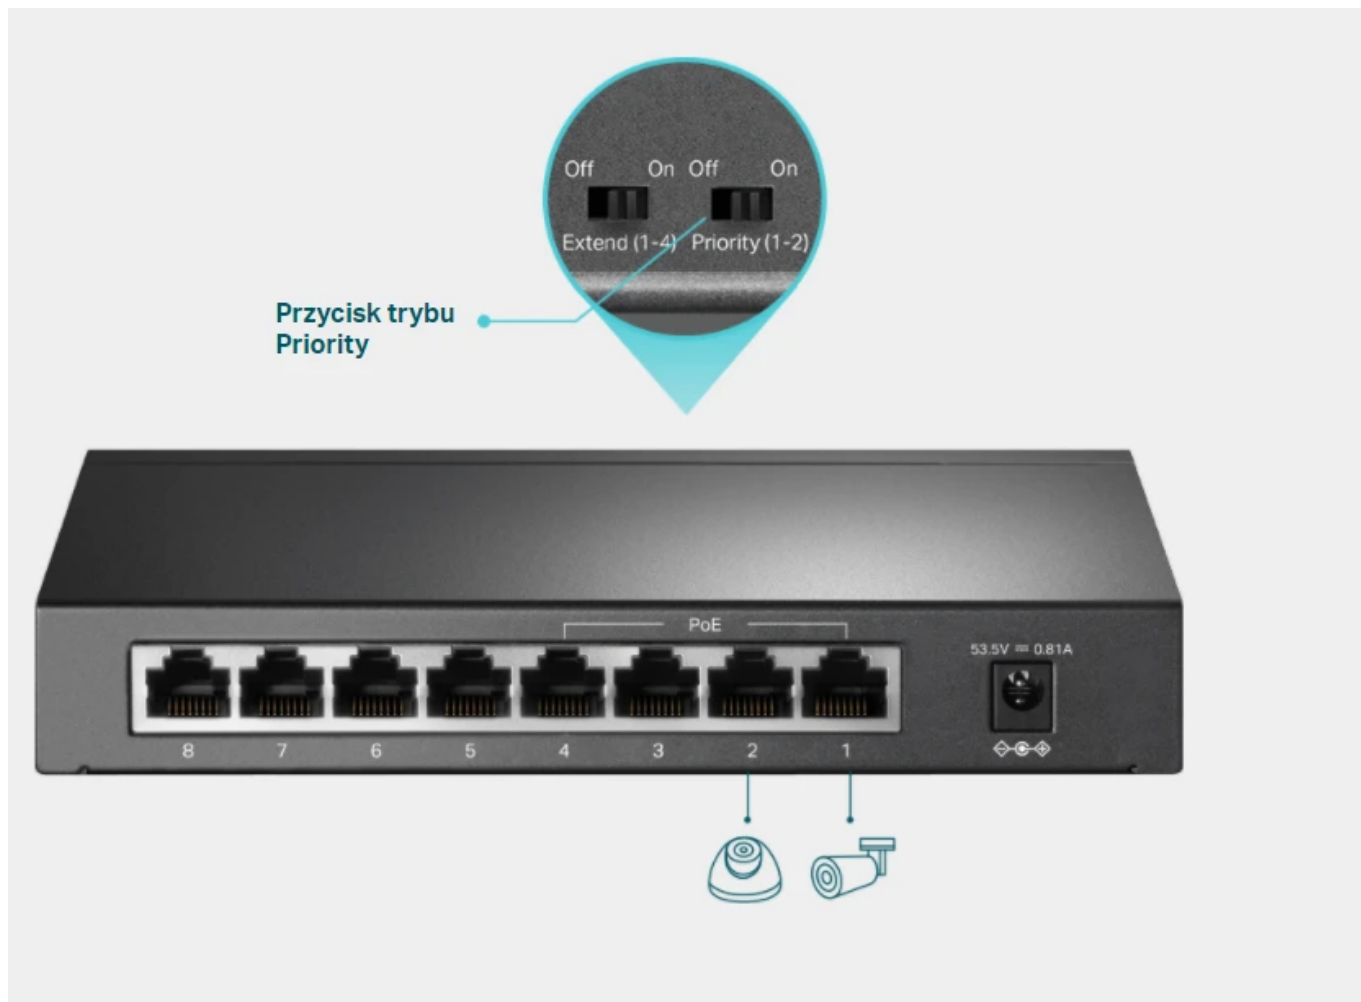

Intelligent energy management

When the total power consumption exceeds 41W, **intelligent power management** cuts power to the lower priority port. This provides power to the high priority ports and protects the device from overloading. The **TL-SF1008LP** automatically detects and provides the required power to PoE devices while protecting the devices.

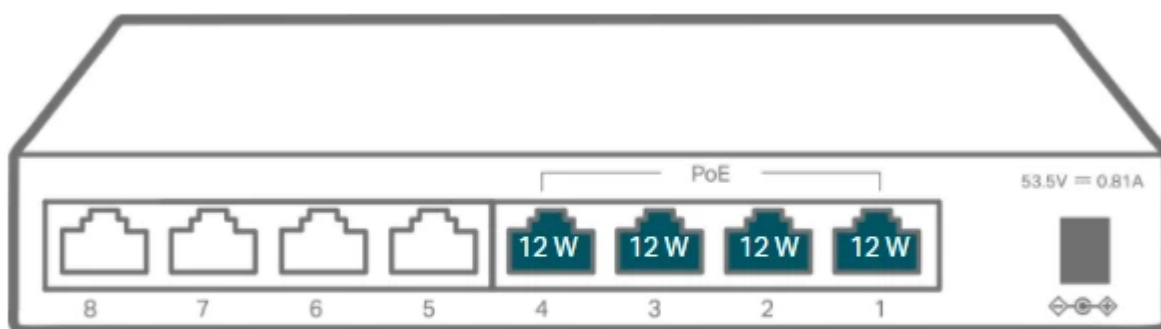

Durable metal housing

The **TL-SF1008LP** 's internal components are protected by a high quality metal chassis that ensures a long product life. Having passed a series of rigorous reliability tests, the TL-SF1008LP delivers high performance that you can rely on.

Wysoka jakość wykonania

