



TP-Link TL-SL1218MP | Switch | 16x RJ45 100Mb/s PoE+, 2x RJ45 1000Mb/s, 2x SFP Combo, Rack, Unmanaged



link to the product:

<https://www.batna24.com/gb/p/switches/tp-link-tl-sl1218mp-switch-16x-rj45-100mb-s-poe-2x-rj45-1000mb-s-2x-sfp-combo-rack-unmanaged>

Price: **972.63 zł** gross / 790.76 zł net



Manufacturer: TP-LINK

Referention number: DNXGFOODRMMKM

Product features

Storage relative humidity (H-H)	5 – 90%
Power source	mains electricity
Height	44 mm
LED indicators	LAN
Width	440 mm
Depth	180 mm
Packet buffer memory	4.1 MB
Storage temperature (T-T)	-40 to 70 °C
Cables included	LAN (RJ-45)
Rack mounting	Yes
Power consumption (typical)	18.7 W
Humidity measurement range	10 – 90%
Harmonized System (HS) code	85176990
Switching capacity	7.2 Gb/s
Quick start guide	Yes
Networking standards	IEEE 802.3af
Switch type	Unmanaged
10G support	No
IFU / User manual	Yes
Auto MDI/MDI-X	Yes
Operating temperature (T-T)	0 – 40 °C
Heat dissipation	741.15 British thermal unit per hour

Total Power over Ethernet (PoE) budget	192 W
User guide	Yes
Flow control support	Yes
Jumbo frames	10000
Jumbo frames support	Yes
MAC address table	8000 entries
Power supply included	Yes
Power over Ethernet (PoE)	Yes
Combo SFP ports quantity	2
AC input frequency	50 Hz
AC input voltage	100 V
Fast Ethernet (copper) ports quantity	16
Gigabit Ethernet (copper) ports quantity	2
Power over Ethernet plus (PoE+) ports quantity	16
Store-and-forward	Yes
Copper ethernet cabling technology	1000BASE-T
Product colour	Black
MAC address filtering	Yes
Basic switching RJ-45 Ethernet ports type	Fast Ethernet (10/100)
Basic switching RJ-45 Ethernet ports quantity	16
Stackable	No

Full product description

Unmanaged PoE switch

TP-LINK TL-SL1218MP is an unmanaged Fast Ethernet switch with 16 PoE+ ports, 2 Gigabit RJ45 ports and 2 Gigabit SFP combo slots. The device allows for power and data transmission over a distance **250 m** in **PoE Extend** mode. Total PoE power budget is **192 W**, which is 30 W per port. The switch is easy to use, no configuration or installation required.




High budget for the power provided

TL-SL1218MP works in **802.3af/at (PoE+)** standard. The switch is able to power devices with **192 W** total, as each port provides up to **30 W** of power. Such a solution will be ideal for small and medium company monitoring systems.



250 meters range

TL-SL1218MP has been designed for IP monitoring. With the PoE switch, installation of the surveillance system is easy, secure and less expensive. With the **PoE Extend** mode, the PoE transmission range reaches **250 m**, so TL-SL1218MP is the perfect solution when you need to deploy IP cameras over a large area.

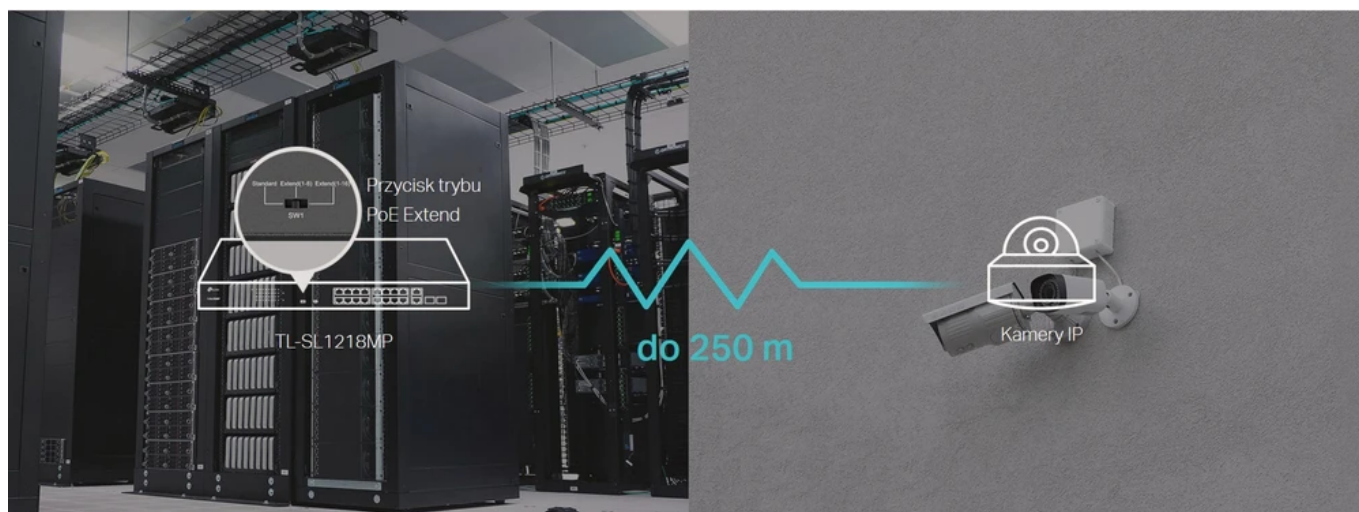

Video quality at the highest level

For more demanding applications, e.g. video surveillance, the TL-SL1218MP gives higher priority to selected ports, ensuring smooth and high quality transmission.

