



TP-Link TL-WA1201 | Access point | AC1200, Dual Band, 1x RJ45 1000Mb/s, Passive PoE



link to the product:

<https://www.batna24.com/gb/p/routers/tp-link-tl-wa1201-access-point-ac1200-dual-band-1x-rj45-1000mb-s-passive-poe>

Price: **178.20 zł** gross / 144.88 zł net



Manufacturer: TP-LINK

Referention number: DNXGGHJOHRMMGQ

Product features

Storage relative humidity (H-H)	10 - 90%
Height	37 mm
Output voltage	12 V
Antenna type	External
Universal Plug and Play (UPnP)	Yes
Width	225 mm
Depth	145.5 mm
Security algorithms	128-bit WEP
Virtual LAN features	Multicast VLAN
Auto Wireless Distribution System (WDS)	Yes
Wi-Fi Multimedia (WMM)/(WME)	Yes
Storage temperature (T-T)	-40 - 70 °C
Cables included	LAN (RJ-45)
Compliance certificates	CE
Maximum data transfer rate	867 Mb/s
IPv4 & IPv6 features	Dual stack IPv4/IPv6
Package weight	860 g
Humidity measurement range	10 - 90%
Quick start guide	Yes
Networking standards	IEEE 802.11a
Ethernet LAN (RJ-45) ports	1
Operating temperature (T-T)	0 - 40 °C

Package depth	255 mm
Package height	69 mm
AC adapter included	Yes
Package width	400 mm
Quality of Service (QoS) support	Yes
VLAN support	Yes
Reset button	Yes
WPS push button	Yes
Service Set Identifier (SSID) features	Multiple SSIDs
On/off switch	Yes
Output current	1.5 A
Power over Ethernet (PoE)	Yes
MIMO type	Multi User MIMO
MIMO	Yes
PoE adapter included	Yes
Placement	Table
Power over Ethernet (PoE) type supported	Active PoE
Antennas quantity	4
Product colour	White
Access Control List (ACL)	Yes
Maximum data transfer rate (5 GHz)	867 Mb/s
Maximum data transfer rate (2.4 GHz)	300
DHCP client	Yes
DHCP server	Yes
6 GHz	No
5 GHz	Yes
2.4 GHz	Yes
Operating system	Microsoft Windows 98SE, NT, 2000, XP, Vista™ or Windows 7, 8, 8.1, 10, MAC OS, NetWare, UNIX or Linux Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0, or other Java-enabled browser
Sustainability compliance	Yes

Full product description

Wireless Access Point AC1200

TP-Link TL-WA1201 Wireless Access Point is an ideal device not only for home use, but also for public spaces, such as workshops and laboratories. The device operates in two bands, which together ensure data transfer speeds up to **1167 MB/s**. With the use of **MU-MIMO** technology, the device sends data to even more connected devices. **Beamforming** technology together with four external antennas can effectively extend the coverage area.

Special Features

- Compact modern design.
- **The device operates in 2.4 and 5 GHz bands.**
- Possibility of **PoE** power supply via Ethernet cable
- Wide range of operating modes
- Four external antennas




Dual-band operating range

The access point, supporting **802.11ac Wave 2** standard, operates in two bands, **2.4 and 5GHz**, which combined allow to transfer data at up to 1167 MB/s. All this allows for simultaneous connection of many wireless devices to the access point without the risk of overloading or delay.




Gigabit performance

In addition to the wireless connection, the device also supports a **Gigabit Ethernet port**. This reliable and fast connection is sufficient even for the most demanding devices such as computers, game consoles or IPTV.

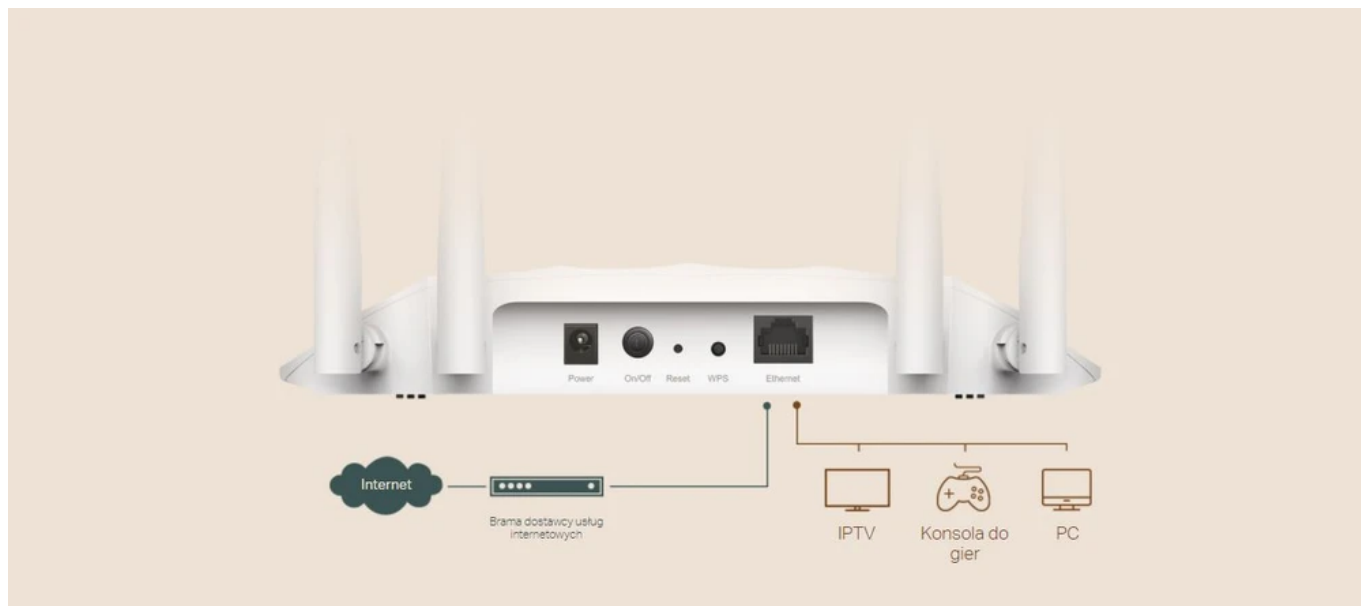


Easy start-up

Only one cable is needed to set up and run the access point. The device supports the **PoE** standard, meaning power is supplied through the Ethernet cable, which is used for both power and data transmission. This allows the **TL-WA1201** to be placed in the most convenient location, regardless of whether there is a power outlet nearby.

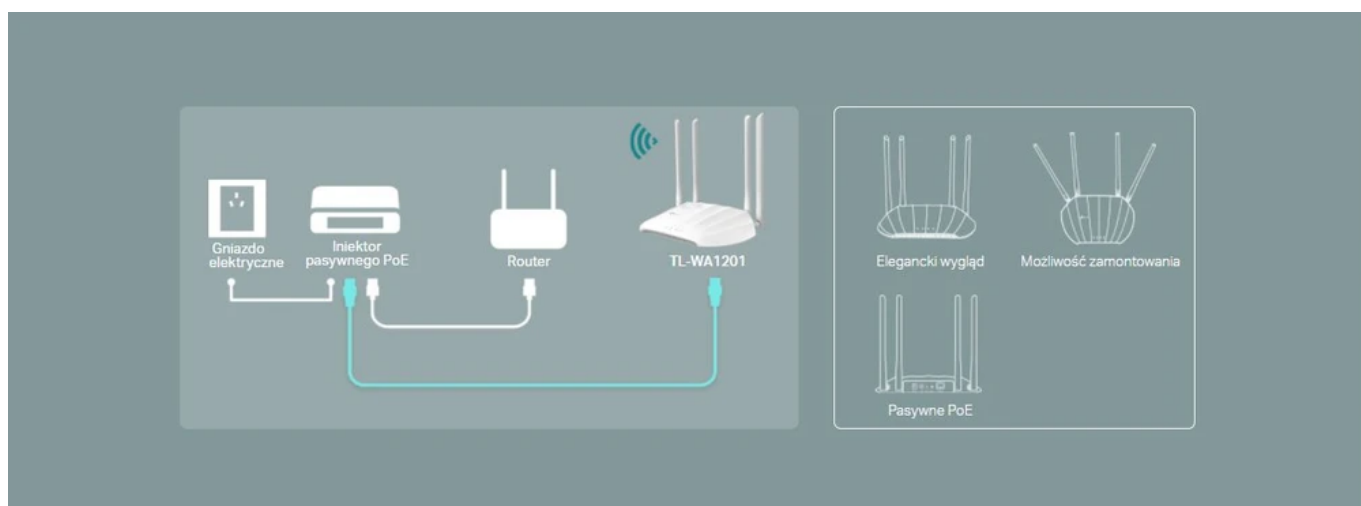

Increased range

The device is equipped with four external antennas. Together with the **Beamforming** technology, they provide even wider and more stable wireless coverage. The **TL-WA1201** Access Point is ideal for data transmission even over long distances.



TL-WA1201



Wspólny punkt dostępu

