



TP-Link TL-WR841N | WiFi Router | N300, 5x RJ45 100Mb/s



link to the product:

<https://www.batna24.com/gb/p/routers/tp-link-tl-wr841n-wifi-router-n300-5x-rj45-100mb-s>

Price: **79.53 zł** gross / 64.66 zł net



Manufacturer: TP-LINK

Referention number: DNXEHHKUEKMK



Product features

Regulatory Approvals	CE, FCC, RoHS
Storage relative humidity (H-H)	5 - 90%
Product type	Tabletop router
Height	28 mm
Output voltage	9 V
LED indicators	Power
USB charging port	No
Firewall	Yes
Memory card slot(s)	No
Universal Plug and Play (UPnP)	Yes
Firewall security	SPI
Width	174 mm
Depth	119 mm
4G	No
Security algorithms	128-bit WEP
Input current	0.6 A
Storage temperature (T-T)	-40 - 70 °C
Cables included	LAN (RJ-45)
Rack mounting	No
VPN Passthrough	Yes
Package weight	520 g
Power consumption (typical)	8 W

Humidity measurement range	10 - 90%
xDSL connection	No
Harmonized System (HS) code	85176990
Ethernet LAN interface type	Fast Ethernet
Quick start guide	Yes
VPN support	PPTP, L2TP, IPSec
Networking standards	IEEE 802.11b
Ethernet LAN (RJ-45) ports	4
Antenna gain level (max)	5 gain
Full duplex	Yes
Filtering	Yes
DC-in jack	Yes
Operating temperature (T-T)	0 - 40 °C
Package depth	202 mm
Package height	86 mm
AC adapter included	Yes
Package width	288 mm
Cabling technology	10/100Base-T(X)
Quality of Service (QoS) support	Yes
Reset button	Yes
Stateful Packet Inspection (SPI)	Yes
Dynamic DNS (DDNS)	Yes
Web-based management	Yes
On/off switch	Yes
Output current	0.6 A
Wi-Fi band	Single-band (2.4 GHz)
Wi-Fi standards	802.11b
Ethernet LAN	Yes
Linux operating systems supported	Yes
Mac operating systems supported	macOS
Windows operating systems supported	Windows 2000
SIM card slot	No
Port triggering	Yes
Top Wi-Fi standard	Wi-Fi 4 (802.11n)
Power source type	DC
Antenna design	External
3G	No
Antennas quantity	2
Detachable antenna(s)	No
Product colour	Black
DoS attack prevention	Yes
DMZ support	Yes
Filtering description	IP, MAC, URL
MAC address filtering	Yes
Ethernet WAN	Yes
Port forwarding	Yes
WLAN data transfer rate (max)	300 Mb/s
DHCP client	Yes

DHCP server	Yes
3G/4G USB modem compatibility	No
DSL WAN	No
Mobile network connection	No
Product weight	700 g

Full product description

TP-Link TLWR841N - fast N-standard Wi-Fi router

TL-WR841N is a high speed **TP-Link** router that supports the IEEE 802.11 b/g/n standard. Thanks to 802.11n technology, the TL-WR841N router achieves a wireless transmission speed of **300 Mbps**, such a transfer will perfectly meet the highest requirements of a home network, providing smooth HD video transmission, stable operation of online games or downloading large files.



High speed wireless connection

The **IEEE 802.11n** standard allows connections even **15 times faster** than 11g products. This router, combined with two **antennas with 5 dBi** gain, gives us incredible range and better wireless performance. TP-Link TLWR841N will satisfy every user, especially the enthusiastic **g> online game**.




No signal loss

Losses of wireless network signal that are caused by long distances or obstacles, e.g. in the form of concrete or steel walls, have been significantly reduced. Thanks to the technology used in the construction of the router we can create **long-distance wireless connection**.



Ease of configuration with the application

With **Tether** you can set up the TLWR841N Wi-Fi network in minutes. Download it to your device with [iOS](#) or [Android](#), and you will be able to monitor network operation and use features such as parental control or access control via your smartphone or laptop. The **WPS button** placed on the router makes it much easier to connect wireless devices to the router, just press it when connecting to the network for the first time and there is no need to enter a password.

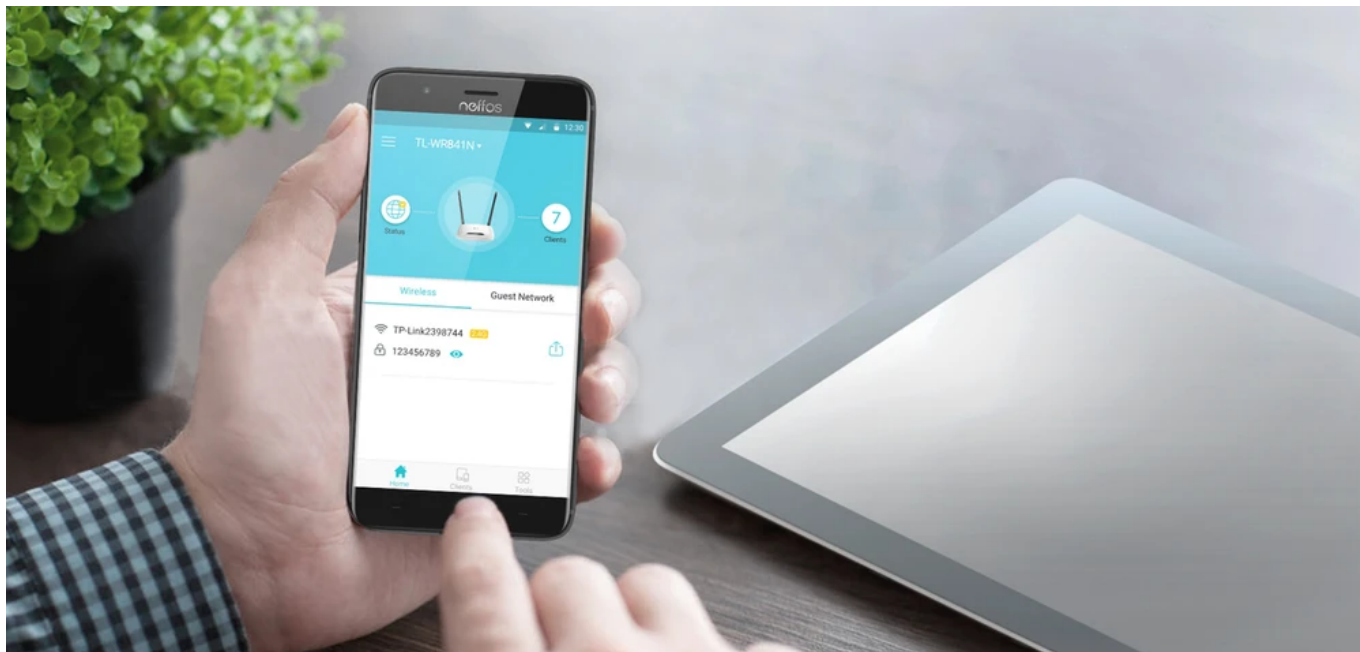

Features of TP-Link TLWR841N 300 Mbs router:

- Wireless N300 Wi-Fi router
- 4 LAN ports 100 Mb/s and 1 WAN port 100 Mb/s
- High speed and connection stability for smooth HD video transmission and seamless online gaming
- Ease of configuration with TP-Link Tether application
- Multiple modes of operation
- Access control configuration (parental control)