



**Ubiquiti LBE-5AC-LR |
Directional antenna |
LiteBeam 5AC, 5GHz, 26dBi,
2x2 MIMO**



link to the product:

<https://www.batna24.com/gb/p/radio-lines/ubiquiti-lbe-5ac-lr-directional-antenna-litebeam-5ac-5ghz-26dbi-2x2-mimo>

Price: **435.08 zł** gross / 353.72 zł net



Manufacturer: UBIQUITI

Referention number: DNXGFOLJDRMLOL

Product features

Regulatory Approvals	CE, FCC, IC
Height	385.75 mm
Input voltage	24 V
Antenna type	Directional antenna
LED indicators	LAN
Width	512 mm
Depth	258.3 mm
Power consumption (max)	7 W
Humidity measurement range	5 – 95%
Harmonized System (HS) code	85177100
Antenna gain level (max)	26 gain
Operating temperature (T-T)	-40 - 70 °C
Cabling technology	10/100/1000Base-T(X)
Internal memory	64 MB
Product colour	White
Internal memory type	DDR2
Product weight	1360 g

Full product description

Wi-Fi radio management

LiteBeam AC integrates separate Wi-Fi for quick and easy configuration with a mobile device.

Improved installation and surge protection

Equipped with increased protection against **ESD damage**. Designed for long distance applications, the LBE-5AC-LR has a larger reflector size and height adjustment. (Azimuth is adjustable by rotation around the pole).




Now with airOS 8 and airView.

airOS 8 offers advanced features, including **airMAX ac** protocol support, real-time signal analysis and a completely new design for **enhanced functionality**.

2x2 MIMO directional antenna with high gain.

LiteBeam AC LR provides **26 dBi** gain for long-distance calls and uses a directional antenna to increase resistance to interference.

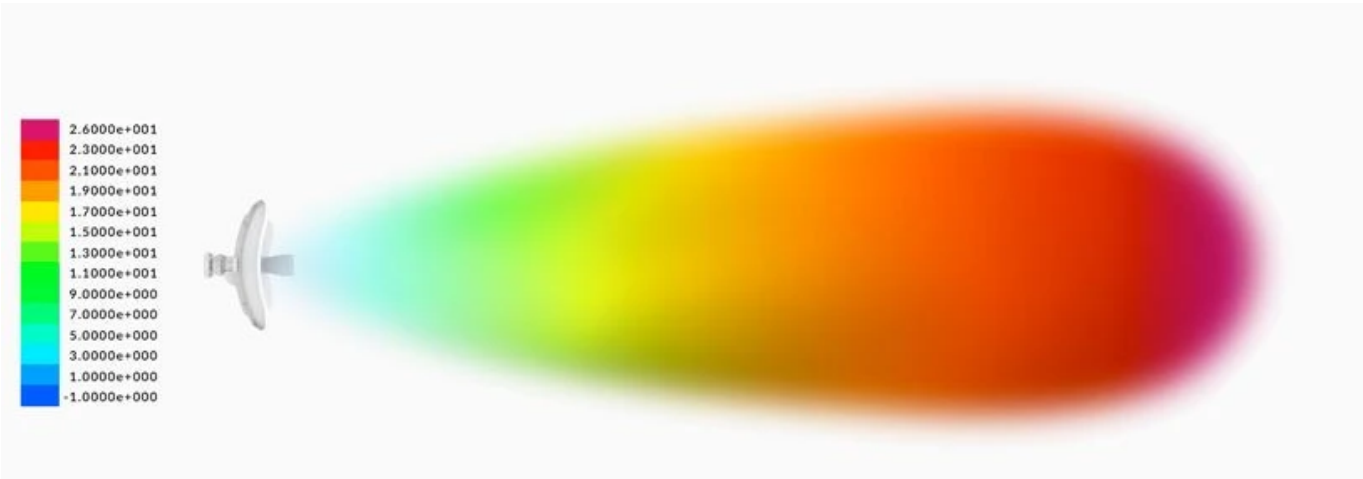



- PtMP airMAX access point mixed mode
- AirMAX ac protocol support
- Long-distance point-to-point (PtP)
- Selectable channel width
- PtP: 10/20/30/40/50/60/80 MHz
- PtMP: 10/20/30/40 MHz
- Automatic channel selection
- Power control: automatic/manual
- Automatic distance selection (ACK Timing)
- WPA2