



Ubiquiti UISP-S-EU | Switch | MicroPoP, 8x RJ45 1000Mb/s, 1x SFP, 110W



link to the product:

<https://www.batna24.com/gb/p/switches/ubiquiti-uisp-s-eu-switch-micropop-8x-rj45-1000mb-s-1x-sfp-110w>

Price: **486.11 zł** gross / 395.21 zł net



Manufacturer: UBIQUITI

Referention number: DNXXGJJQFRMMHQ

Product features


Regulatory Approvals	CE, FCC, IC
Power source	mains electricity
Height	29 mm
LED indicators	LAN
Width	210.4 mm
Depth	95 mm
Input current	4.4 A
Power consumption (typical)	8 W
Humidity measurement range	5 - 95%
Quick start guide	Yes
Switch type	Managed
IFU / User manual	Yes
DC input voltage	20 V
Operating temperature (T-T)	-10 °C - 50 °C
User guide	Yes
Fiber optic connector	SFP+
Power over Ethernet (PoE) ports quantity	8
Power over Ethernet (PoE)	Yes
SFP module slots quantity	1
Fiber uplink ports quantity	1
Power over Ethernet (PoE) type supported	Passive PoE
Product colour	White

Power connector	DC-in jack
Switch layer	L2+
Basic switching RJ-45 Ethernet ports type	Gigabit Ethernet (10/100/1000)
Watch case material	Polycarbonate (PC)
Basic switching RJ-45 Ethernet ports quantity	8
Product weight	610 g

Full product description


Gigabit PoE switch for MicroPoP applications.

Ideal for wireless Internet service providers (WISPs), the **UISP®** switch is a fanless Layer 2 PoE switch with **8 GbE RJ45 ports and 1 1G SFP port** for an additional fiber connection option. The UISP switch is a cost-effective solution for WISP companies that want to provide gigabit wireless speeds to their customers quickly and cost-effectively.

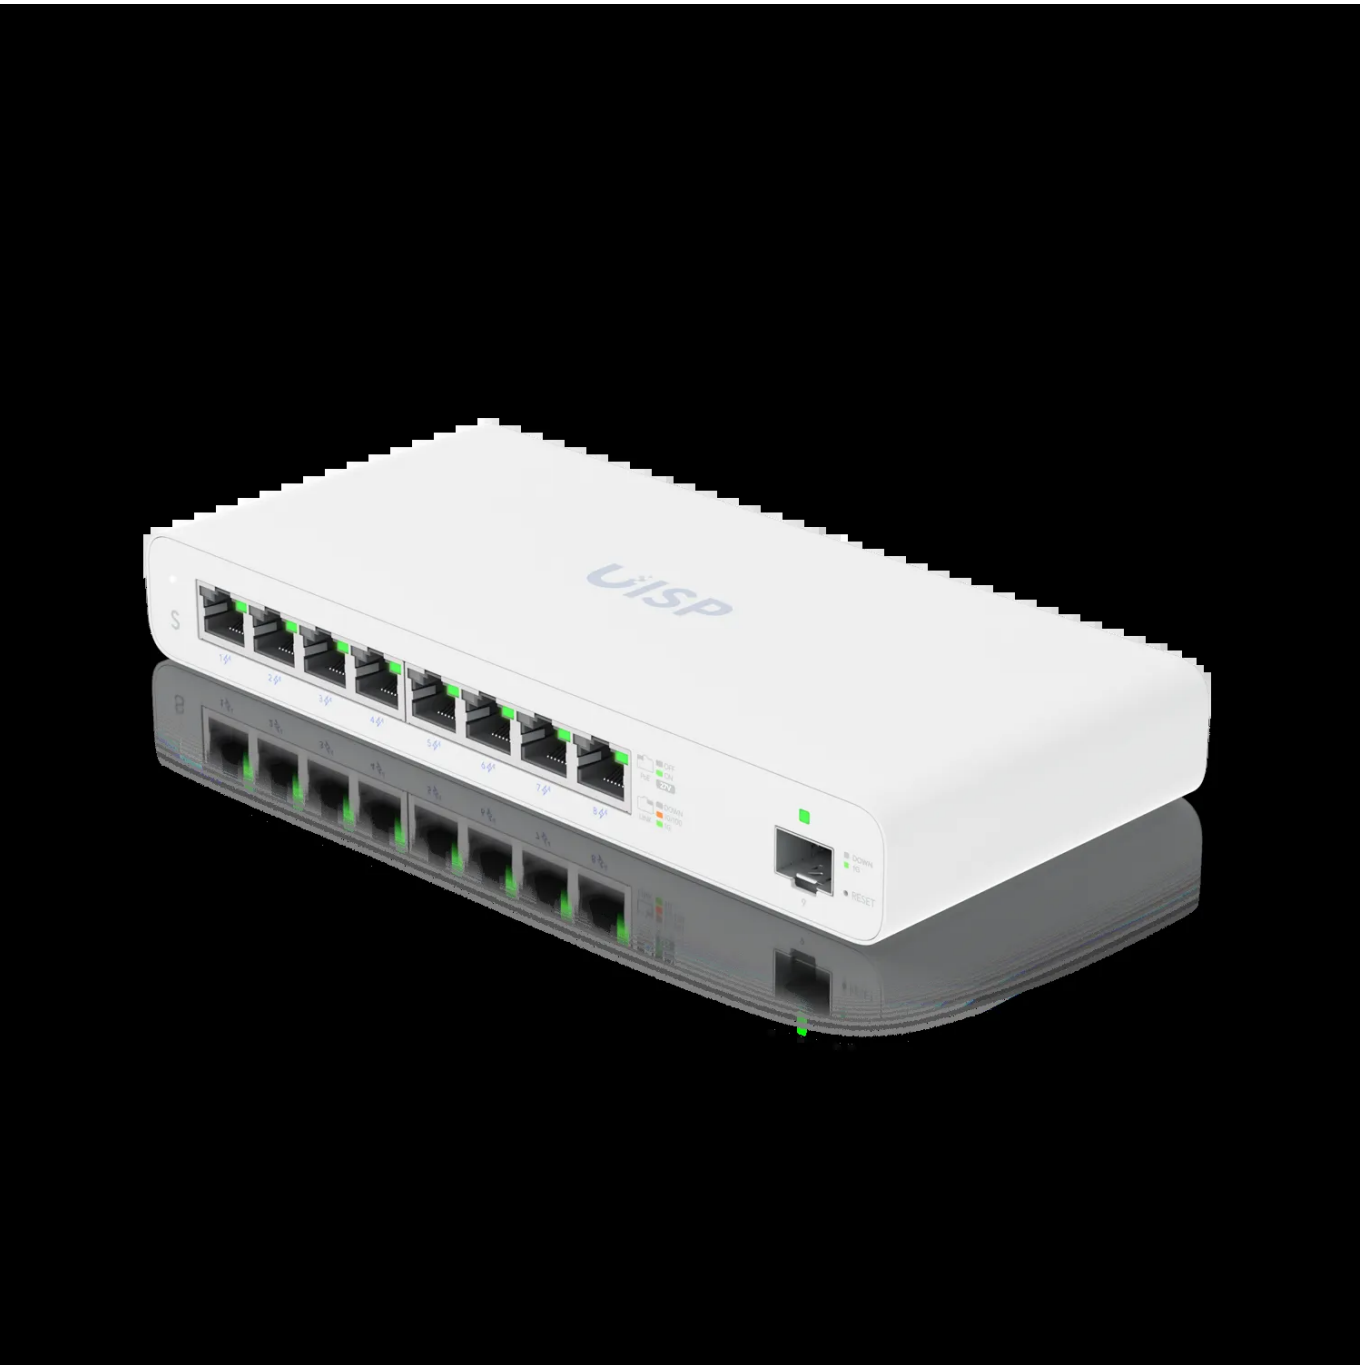

Ubiquiti UISP Switch

With a hefty **110 W** of total PoE power, the UISP switch provides significant power to any radio in a service network. For larger deployments, pair it with the UISP console to create a consistent routing and switching hub. **The UISP switch** is managed through the UISP application, a centralized platform where all UISP devices can be monitored and managed.

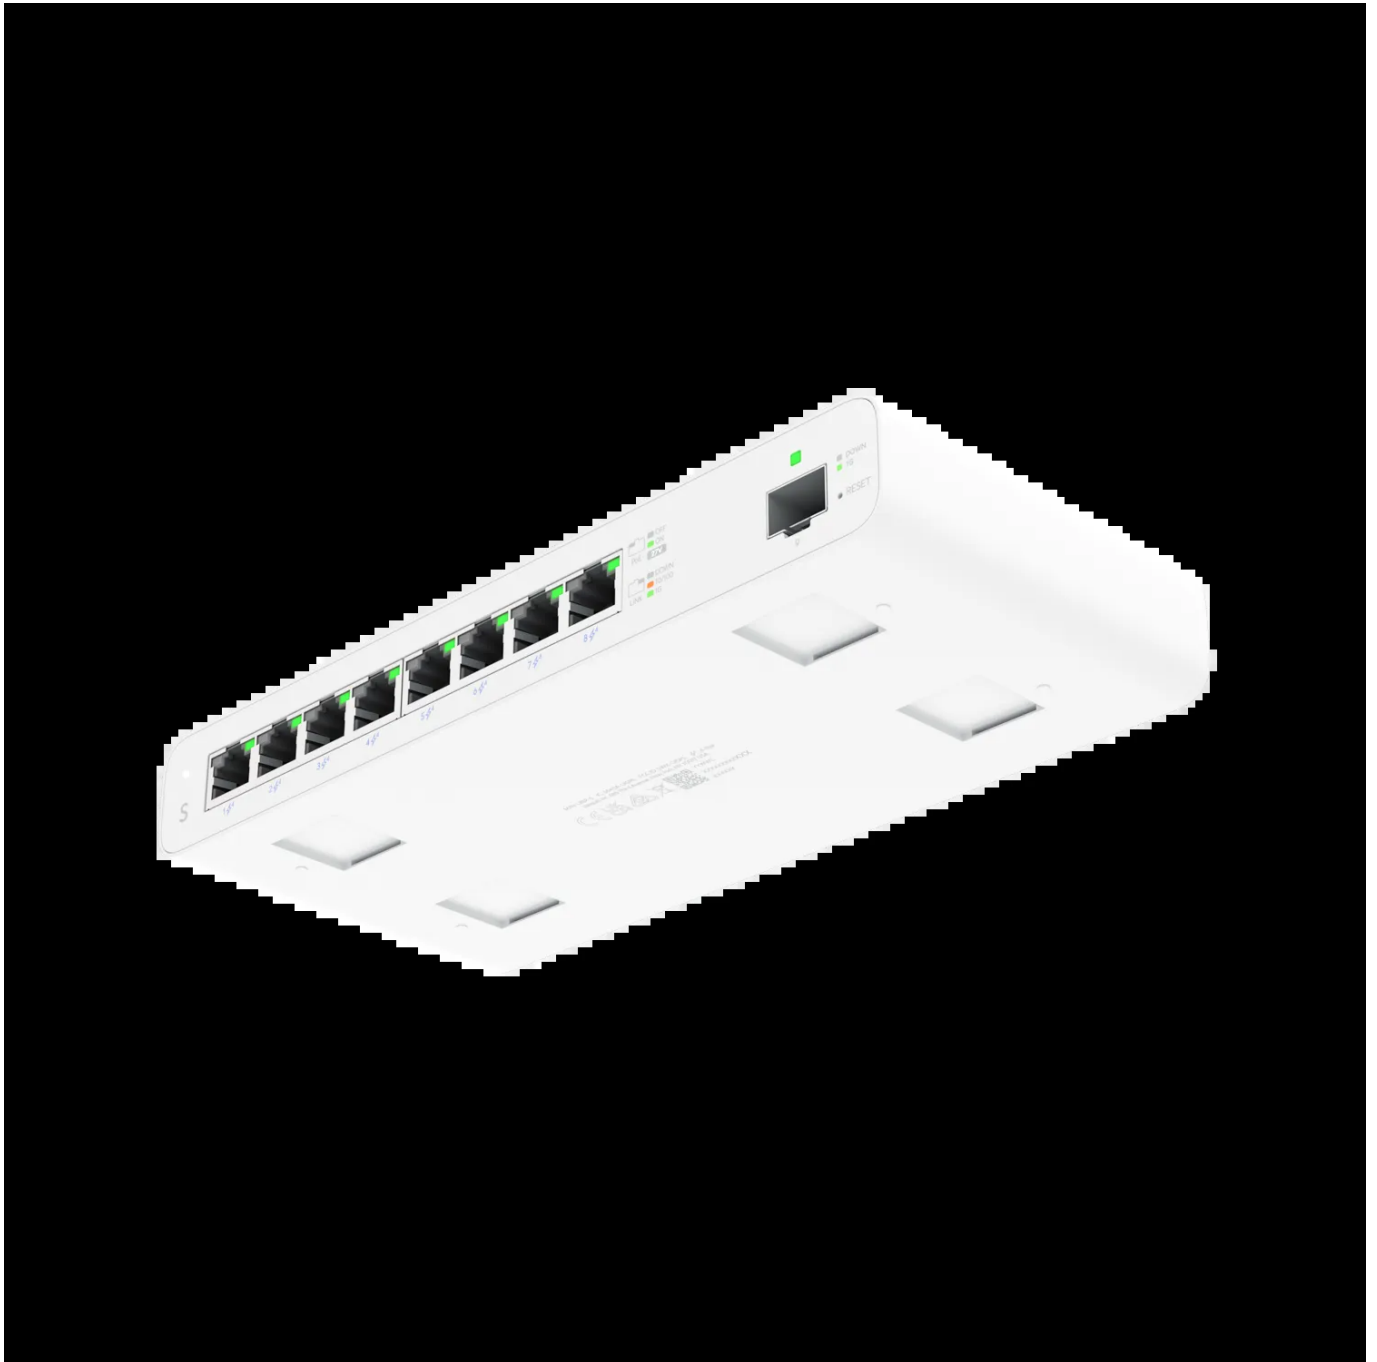

Features:

- GbE RJ45 ports with 27V passive PoE, supporting 2-pair and 4-pair modes
- 1G SFP port
- 110W PoE power supply when powered by the included AC/DC adapter
- Fanless, thermal cooling for quiet operation
- Wall-mountable
- Layer 2 switching functions
- Easy configuration via Bluetooth using the UISP Mobile app