



Ubiquiti USW-PRO-48 | Switch | UniFi GEN2, 48x RJ45 1000Mb/s, 4x SFP+



link to the product:


<https://www.batna24.com/gb/p/switches/ubiquiti-usw-pro-48-switch-unifi-gen2-48x-rj45-1000mb-s-4x-sfp>

Price: **2,651.13 zł** gross / 2,155.39 zł net



Manufacturer: UBIQUITI

Referention number: DNXXGFQMMFRMMKM

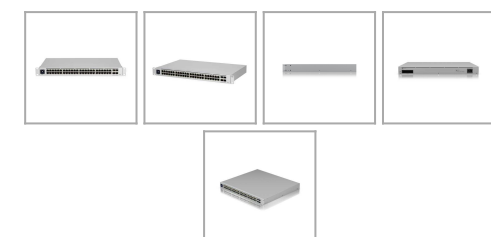

Product features

Regulatory Approvals	CE, FCC, IC ETSI300-019-1.4
Height	43.7 mm
LED indicators	Activity
Width	442.4 mm
Depth	285.4 mm
Backlight display	Yes
Input current	5.22 A
Rack mounting	Yes
Power consumption (max)	60 W
Authentication type	IEEE 802.1x
Humidity measurement range	10 - 90%
Harmonized System (HS) code	85176990
Switching capacity	176 Gb/s
Networking standards	IEEE 802.1x
Switch type	Managed
10G support	Yes
Spanning tree protocol	Yes
Broadcast storm control	Yes
Operating temperature (T-T)	-5 to 45 °C
VLAN support	Yes
Link aggregation	Yes
User guide	Yes

SFP+ module slots quantity	4
Flow control support	Yes
Port mirroring	Yes
Power supply included	Yes
Power over Ethernet (PoE)	No
AC input frequency	50 Hz
AC input voltage	100 V
Product colour	Silver
Switch layer	L2+/L3
Basic switching RJ-45 Ethernet ports type	Gigabit Ethernet (10/100/1000)
Basic switching RJ-45 Ethernet ports quantity	48
Product weight	4000 g

Full product description

Ubiquiti USW-PRO-48

The USW-PRO-48 by Ubiquiti is a switch with **48 x Gigabit Ethernet ports** and **4 x 10 GB SFP ports** .



It offers everything you need

UniFi Switch**Pro 48** is a **Layer 2 and Layer 3** managed gigabit switch that offers a rich set of features such as **inter-VLAN routing, static routing and DHCP server**. UniFi Switch Pro 48 is the ideal aggregation and access layer switch for any **UniFi** solution and combines innovative near-silent cooling with UniFi **SmartPower RPS** power redundancy.

Touchscreen LC module - instant diagnosis

The USW-Pro-48 switch's **1.3-inch touchscreen LCM module** provides link status information for easy monitoring and quick troubleshooting. The compact size, fanless design and included mounting brackets make the unit easy to install in a **SOHO rack**.



Can be configured from anywhere in the world

UniFi Pro Switch 48 PoE is managed and configured by the UniFi Network Controller **with support for UniFi mobile apps**. The switch offers an extensive suite of advanced Layer 3 switching protocols and features including mode of operation (switching, mirroring or aggregation) for each

port, **inter-VLAN routing, static routing server and DHCP**. The UniFi OS Console and mobile app allow administrators from anywhere to configure and monitor virtually all switch functions in a graphical user interface.

Key features

- 48 x Gigabit RJ45 ports
- 4 x 10G SFP ports
- Layer 2 and Layer 3 functions
- UniFi SmartPower RPS DC input
- Nearly silent cooling
- Touch screen display 1.3"
- Management via UniFi Network Controller
- Guest/hotspot portal maintenance