



Ubiquiti UVC-G3-Flex-3 | IP Camera | Unifi Video Camera, Full HD 1080p, 25 fps, 1x RJ45 100Mb/s, 3-pack



link to the product:

<https://www.batna24.com/gb/p/ip-cameras/ubiquiti-uvc-g3-flex-3-ip-camera-unifi-video-camera-full-hd-1080p-25-fps-1x-rj45-100mb-s-3-pack>

Price: **896.02 zł** gross / 728.47 zł net



Manufacturer: UBIQUITI

Referention number: DNXXGFPJNMRMMOQ



Product features

Height	107.5 mm
Width	48 mm
Depth	48 mm
Connectivity technology	Wired
Maximum resolution	1920 pixels
Frame rate	25 frames per second
Power consumption (max)	4 W
Night mode	Yes
Humidity measurement range	20 - 90%
Harmonized System (HS) code	85258900
Ethernet LAN (RJ-45) ports	1
Number of cameras	3
Operating temperature (T-T)	-20 - 50 °C
Built-in microphone	Yes
Lens viewing angle, diagonal	104 °
Total megapixels	2 MP
Lens viewing angle, vertical	47 °
Fixed focal length	3.4 mm
Ethernet LAN	Yes
Power source type	PoE
Product colour	White
Mounting hardware type	Wall/Pole

Type	IP security camera
Designation	Indoor & outdoor
Product weight	170 g

Full product description

A small camera with a wide range of capabilities

The UniFi Video Camera G3 Flex has a wide-angle lens and 1080p video resolution, which provides a wide surveillance range. Mounting options include desktop, wall or pole mounting, for both indoor and outdoor installations. Infrared LEDs and an automatic infrared filter provide high-quality day and night surveillance. The G3 Flex also has an adjustable lens and swivel base for vertical and horizontal viewing angle adjustment.



Manage cameras with the UAS-XG application server and the UVC-NVR-2TB DVR

The UniFi application server and the UniFi NVR are equipped with the pre-installed UniFi Video software, which allows the immediate deployment of a UniFi application server to configure and manage UniFi video cameras.



The angle of view or monitoring range of the G3 Flex can be changed at any time.


Tilt the lens up or down for vertical adjustment. Rotate the base left or right for horizontal adjustment.



Protect the installation against surges with Ubiquiti surge protection ETH-SP-G2

Surge protection should be used in all outdoor installations. We recommend using two Ethernet surge protections, model ETH-SP-G2, one near

the camera and the other at the point of entry to the building. The ETH-SP-G2 will absorb the surges and safely discharge them to earth.

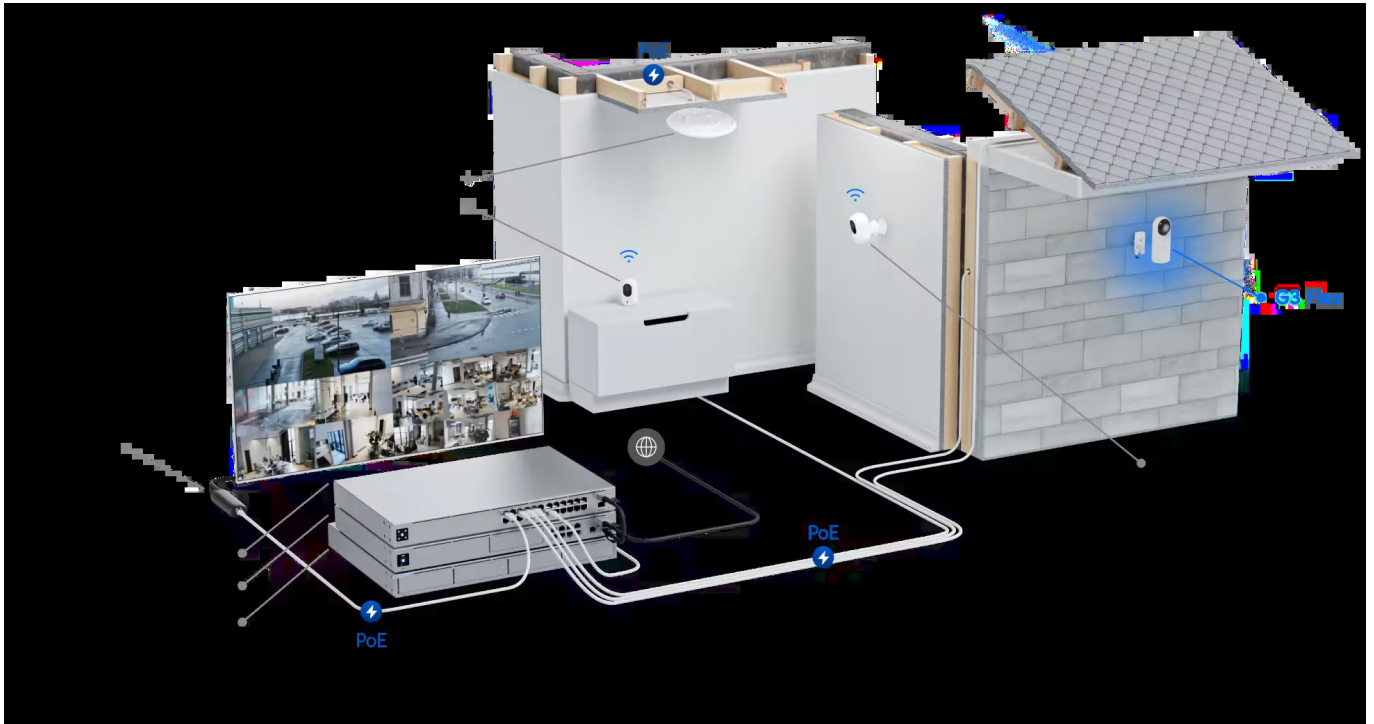

Special features of UVC-G3-FLEX

- Video resolution: 1080p Full HD, 25 FPS, 25 FPS
- EFL 4 mm, $f/2.0$
- Wide angle lens
- 802.3af PoE
- Built-in microphone
- Desk, wall or mast mounting
- Adjustable lens and swivel base for vertical and horizontal angle of view adjustment