



Extralink ZEUS V2 | PoE Switch | 24x Gigabit PoE/PoE+, 4x 10G SFP+, 1x Console Port, 440W, L2/L3, Managed



link to the product:

<https://www.batna24.com/gb/p/switches/extralink-zeus-v2-poe-switch-24x-gigabit-poe-poe-4x-10g-sfp-1x-console-port-440w-l2-l3-managed>

Price: **1,699.00 zł** gross / 1,381.30 zł net

Manufacturer: EXTRALINK



Referention number: DNXGFOKMMRMMOJ

Full product description

Extralink ZEUS V2 24-port, manageable switch

Extralink ZEUS V2 is a manageable PoE switch with 24 Gigabit ports and 4 SFP+ ports with 10 G. **The ZEUS v2** Switch is ideal for connecting IP cameras, Wi-Fi access points, Wi-Fi bridges, IP phones and other PoE-powered devices.



Features:

- Ports 1-8 support PoE power up to 250 meters (recommended cat 5e or 6 power cable)
- Supports VLAN, ports 1-24 are isolated from each other, which can effectively stop network storms and improve network efficiency

- IEEE 802.3af/at standard automatically detects and identifies IEEE 802.3af/at compliant devices
- Auto MDI/MDIX functions
- Transfer mode: store-and-forward
- Intelligent power supply
- Power circuit protection to protect the safety of the connected devices
- Saving energy in an unconnected port
- All ports are configurable with link speed
- Plug and play, easy to use



Functional buttons:

- QOS: Improved video processing capabilities - the ideal mode for monitoring
- EXTEND: ports 1-8 lower the throughput to 10 Mbps, but the PoE power transmission range is increased to 250 meters
- VLAN: port separation 1-24 - effectively suppressing network storms and improving network performance
- AI PS: detection of a power failure of the device and restarting the power supply on a given port



Switch with layer 3 routing functions

The ZEUS V2 switch offers support for Layer 3 routing protocols, comprehensive security mechanisms, improved ACL/QoS strategy, numerous VLAN capabilities and ease of function management.




24 RJ45 Gigabit RJ45 ports with PoE power and 4 SFP+ ports with 10 Gb/s throughput

Extralink ZEUS V2 has 24 PoE 10/100/1000 Mbps, IEEE802.3af and IEEE802.3at ports. When the switch mode is EXTEND, ports 1 to 8 support PoE power up to 250 meters at 10 Mbps. The device also has four 10 Gigabit SFP+ optical ports (XG1, XG2, XG3, XG4), which can be equipped with appropriate 10 Gigabit SFP+ modules.



Management through a console port

Zeus V2 has a console port that is used to connect to a computer or other terminal to manage or configure the switch.

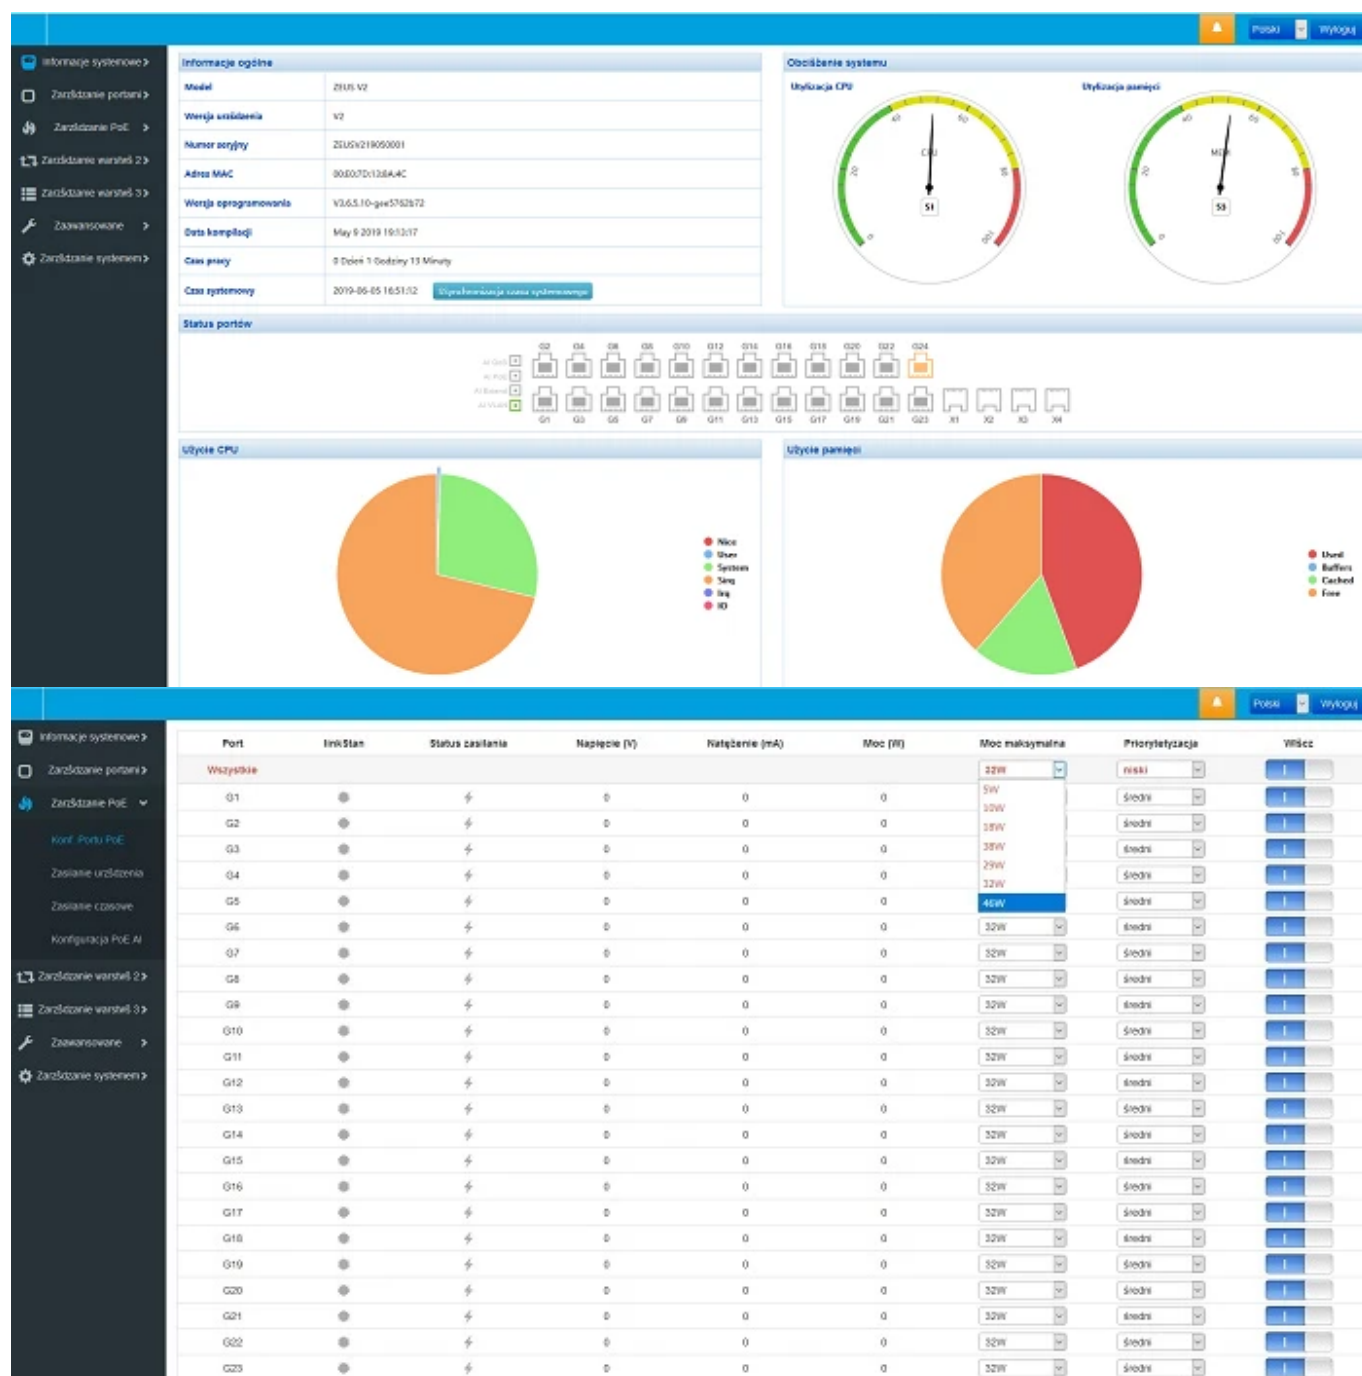

Informacje systemowe >

Zarządzanie portami >

Zarządzanie PoE >

Zarządzanie wstążkami >

Lista adresów MAC

Konfiguracja VLAN

Konfiguracja GVRP

Agregacja połączeń

Konfiguracja MSTP

Ochrona przed pętlą

DHCP Snooping

IGMP Snooping

Konfiguracja 802.1x

Zarządzanie wstążkami >

Zaawansowane >

Zarządzanie systemem >

Stany VLAN

Konfiguracja VLAN

Konfiguracja Voice VLAN

Konfiguracja MAC-VLAN

Konfiguracja IP-VLAN

Port	Typ VLAN	PVID	vlan untag	vlan tag
G1	access	1	1	
G2	access	1	1	
G3	trunk	1	1	
G4	access	1	1	
G5	access	1	1	
G6	access	1	1	
G7	access	1	1	
G8	access	1	1	
G9	access	1	1	
G10	access	1	1	
G11	access	1	1	
G12	access	1	1	
G13	access	1	1	
G14	access	1	1	
G15	access	1	1	
G16	access	1	1	
G17	access	1	1	
G18	access	1	1	
G19	access	1	1	
G20	access	1	1	

Informacje systemowe >

Zarządzanie portami >

Zarządzanie PoE >

Zarządzanie wstążkami >

Zarządzanie wstążkami >

Konfiguracja interfejsu

Konfiguracja trasy

Konfiguracja ARP

Konf. Serwer DHCP

Konf. DHCP Relay

Konfiguracja RRP

Konfiguracja OSPF

Zaawansowane >

Zarządzanie systemem >

Widok trasy

Tabela statystyk

Nie	Powód	Maska	Znak	Brana domyślna	Out interface
1	127.0.0.0	8	0*		lo
2	192.168.254.0	24	0*		vlan1

Kod: K - kernel route, C - connected, S - static, R - RRP, O - OSPF, I - IS-IS, B - BGP, P - PM, A - Babel, N - NARP, * - selected route, * - full route

Odkaz