



Zyxel NWA1123-AC V2 | Access point | Dual Band, 1x RJ45 1000Mb/s



link to the product:

<https://www.batna24.com/gb/p/access-points/zyxel-nwa1123-ac-v2-access-point-dual-band-1x-rj45-1000mb-s>

Price: **606.99 zł** gross / 493.49 zł net



Manufacturer: ZYXEL

Referention number: DN XF MH QL MR M NG M

Product features

Regulatory Approvals	FCC Part 15C, FCC Part 15E; ETSI EN 300 328, EN 301 893; LP0002, EN 60601-1-2, FCC Part 15B, EN 301 489-1; EN 301 489-17, EN55022, EN55024, EN61000-3-2/-3, BSMI CNS13438, EN 60950-1, IEC 60950-1; BSMI CNS14336-1
Storage relative humidity (H-H)	10 - 90%
Height	54.7 mm
Output voltage	12 V
Modulation	16-QAM
Receiver sensitivity	2.4 GHz: - 802.11b/g, -99 dBm - 802.11n/20 MHz, -93 dBm - 802.11n/40 MHz, -88 dBm 5 GHz: - 802.11a, -95 dBm - 802.11ac/n/20 MHz, -94 dBm - 802.11ac/n/40 MHz, -92 dBm - 802.11ac/80 MHz, -89 dBm
Width	130 mm
Depth	130 mm
Security algorithms	EAP-AKA
Auto Wireless Distribution System (WDS)	Yes
Mounting kit	Yes
Input current	0.3 A
Storage temperature (T-T)	-30 - 70 °C
Maximum data transfer rate	1200 Mb/s
Package weight	700 g
Power consumption (typical)	9 W
Humidity measurement range	10 - 90%

Networking standards	IEEE 802.11a
Ethernet LAN (RJ-45) ports	1
DC-in jack	Yes
Operating temperature (T-T)	0 - 50 °C
Package depth	209 mm
Package height	72 mm
AC adapter included	Yes
Package width	278 mm
VLAN support	Yes
Reset button	Yes
Management protocols	ZAC, SNMP, CLI, AP
Output current	1 A
Power over Ethernet (PoE)	Yes
MIMO type	Multi User MIMO
MIMO	Yes
Placement	Ceiling
AC input frequency	50 Hz
AC input voltage	100 V
Antennas quantity	2
Number of SSID supported	16
Antenna features	Integrated antenna
Fast roaming	Yes
Product colour	White
MAC address filtering	Yes
DHCP client	Yes
Internal	No
5 GHz	Yes
2.4 GHz	Yes
Product weight	300 g

Full product description

Zyxel NWA1123-ACv2 802.11ac - hybrid access point

Hybrid access point **Zyxel NWA1123-ACv2** allows for data transmission - with maximum speed of 1.2 Gb/s. The device's antenna has been developed by Zyxel in the "RF First" approach, ensuring reliability of the connection and increasing the achieved speed and range. With **NebulaFlex** technology, you can easily manage the operation of the access point, between standalone operation and cloud-managed mode - with **free license**.



A stylish access point

Access point **Zyxel NWA1123-ACv2** is characterized not only by high performance, but also by modern design. The device resembles a regular smoke detector - it hides excellent parameters.




Optimal solutions

Innovative solutions in wireless technology **Wi-Fi** allowed to improve radio parameters in the access point. Equipped with **DCS** and load balancing mechanism **Zyxel NWA1123-ACv2** provides the best quality wireless network. Installing the device through a three-stage ZON configuration will allow the access point to operate autonomously, without the need for additional management tools. The administrator can easily monitor the device via SNMP - accessible to every user.



Many options to choose from

NWA1123-ACv2 supports **repeater** and **root-AP** compatible **Zyxel Unified** and **Zyxel Unified Pro**. This allows you to expand wireless connectivity through a premium **WDS** system - working under severe installation conditions. **NWA1123-ACv2** also has additional useful functions: **multi-profile SSID** and a number of robust Wi-Fi security features.

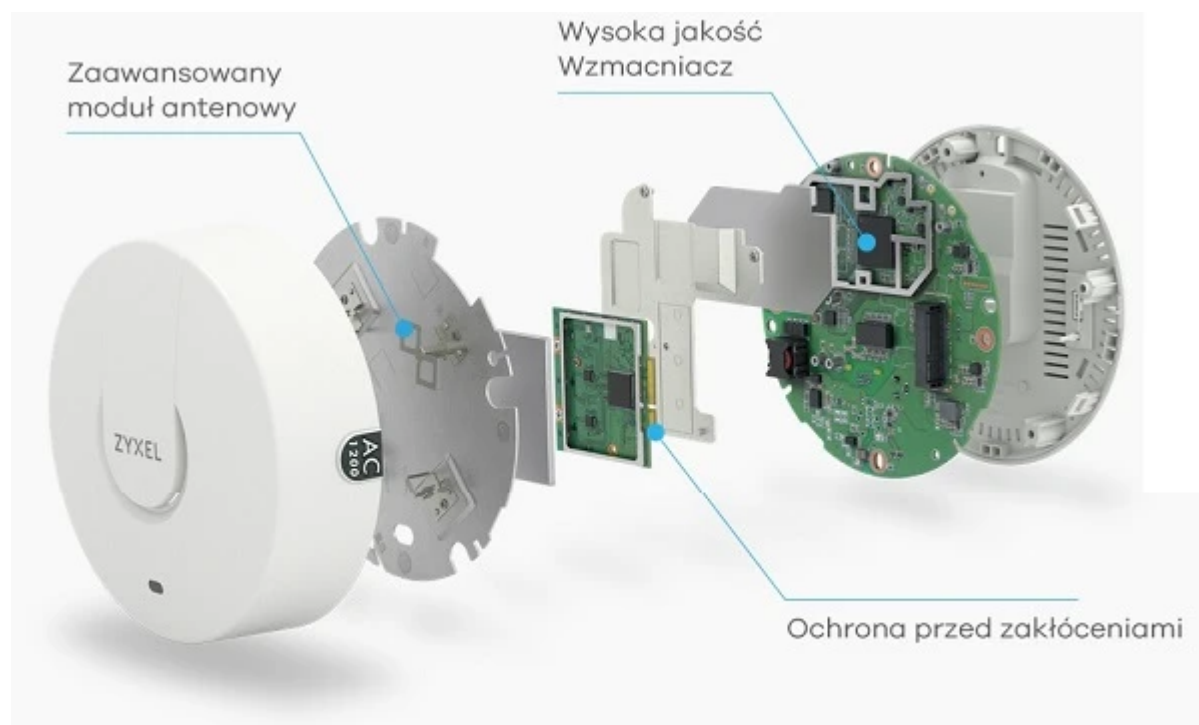

Excellent performance

NWA1123-AC PRO is equipped with a double-optimized **aerial module** as well as a **power amplifier** and low-noise components - ensuring the highest quality connection.