



Cisco SPA112 | VoIP Gateway | 2x RJ11, 1x RJ45, CISCO Official partner



link to the product:

<https://www.batna24.com/gb/p/voip/cisco-spa112-voip-gateway-2x-rj11-1x-rj45-cisco-official-partner>

Price: **81.20 zł** gross / 66.02 zł net



Manufacturer: CISCO

Referention number: DNXEIKHQHSPJ

Product features


Regulatory Approvals	FCC, CE, ICES, A-Tick, RoHS, UL
Storage relative humidity (H-H)	10 - 90%
Height	28 mm
Output voltage	5 V
LED indicators	Yes
Authentication method	SIP
Width	101 mm
Depth	101 mm
Security algorithms	SSL/TLS
Storage temperature (T-T)	-25 - 70 °C
Humidity measurement range	10 - 90%
Call waiting	Yes
Modem (RJ-11) ports	2
VPN support	802.1p
Ethernet LAN (RJ-45) ports	1
Fax compatibility	T.38
Power LED	Yes
Operating temperature (T-T)	0 - 45 °C
Quality of Service (QoS) support	Yes
Supported network protocols	IPv4, IPv6, ARP, DNS, SRV, DHCP, PPPoE, ICMP, TCP, UDP, RTP, RTCP, SNTP
Reset button	Yes
Voice codecs	G.711

Conference call	Yes
Output current	2 A
AC input frequency	50 Hz
AC input voltage	100 V
MAC address filtering	Yes
DHCP client	Yes
Caller ID	Yes
Product weight	153 g

Full product description

Two-port VoIP gateway Cisco SPA112

The two-port Cisco adapter offers trouble-free and convenient use of the phone over the Internet. **The SPA112** gateway guarantees high quality voice transmission via **IP (VoIP)**. The adapter created by Cisco ensures ideal sound quality and the use of fax and telephone functions - without the need to upgrade existing analog phones.

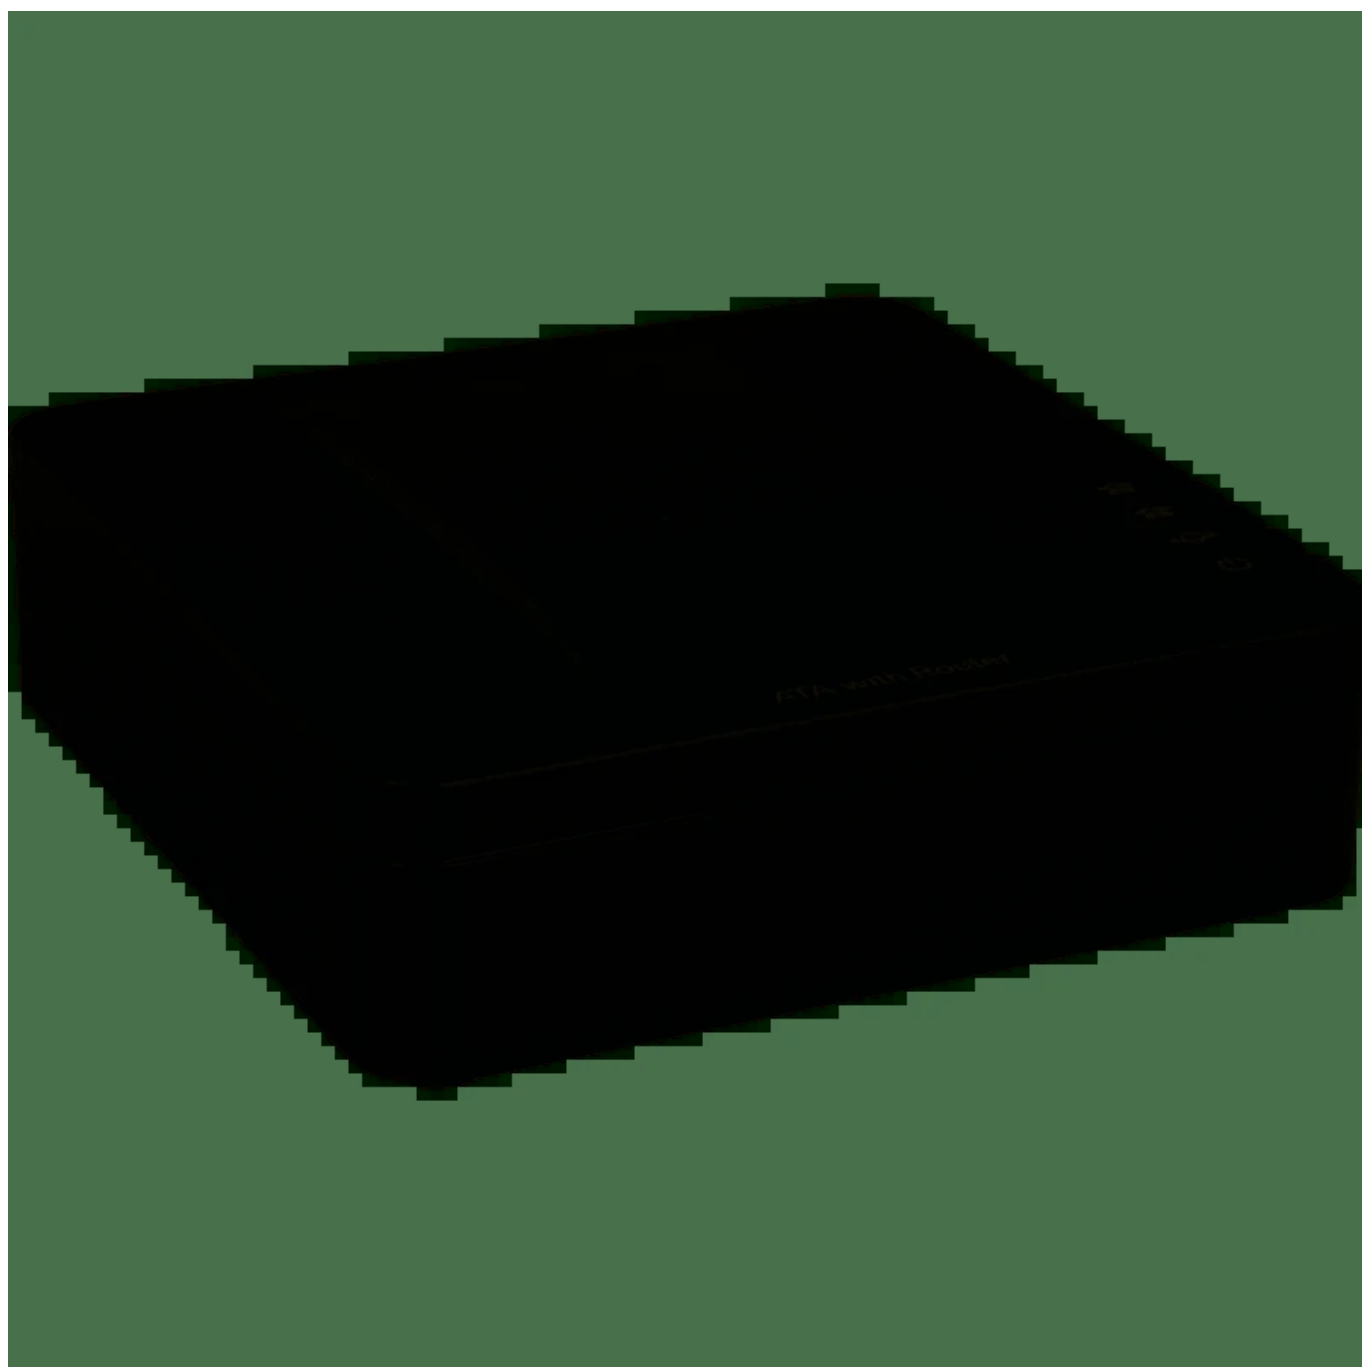

Ergonomics and compatibility

Cisco SPA112 has a compact housing. It is compatible with international standards for voice and data transmission. It is equipped with **2 FXS** ports - i.e. inputs enabling connection of two independent **wireless** or **wireless** telephones.



Simplicity in every way

The SP112 VoIP gateway is easy to use and install. By operating via **IP** the connection of phones and faxes to the VoIP provider is extremely simple. It also does not have any blockages - which allows you to connect to any **VoIP** operator. The adapter has been designed mainly for **households** and **small businesses**.



Functions SPA112:

- Caller ID Blocking
- Caller ID
- Echo cancellation (LEC)
- Do not disturb (DND)
- Call Waiting
- Call switching
- Noise Generation System (CNG)
- Three-way Conference Calling
- Cooperation with fax
- Voice Activity Detection (VAD)