



## Extralink EGH-3000 | Power generator | hybrid, 3kW 1F



link to the product:

<https://www.batna24.com/gb/p/generators/extralink-egh-3000-power-generator-hybrid-3kw-1f>

Price: **2,500.00 zł** gross / 2,032.52 zł net

Manufacturer: EXTRALINK



Referention number: DNXGGJORFRMMJ

### Product features

|                               |                               |
|-------------------------------|-------------------------------|
| Rated current                 | 8.3 A                         |
| Number of strokes             | 4                             |
| Number of cylinders           | 1                             |
| Frame material                | Metal                         |
| Rated power                   | 2800 W                        |
| Rated frequency               | 50 Hz                         |
| Engine power                  | 7 hp                          |
| Package weight                | 48000 g                       |
| Cooling type                  | Air                           |
| Package depth                 | 440 mm                        |
| Package height                | 440 mm                        |
| Package width                 | 605 mm                        |
| Maximum power                 | 3000 W                        |
| Castor wheels                 | Yes                           |
| Rated voltage                 | 220 V                         |
| Fuel tank material            | Steel                         |
| Number of batteries supported | 1                             |
| Fuel consumption              | 1.2 l/h                       |
| Product colour                | Black                         |
| Fuel type                     | Liquefied Petroleum Gas (LPG) |

|                     |         |
|---------------------|---------|
| Ignition system     | Manual  |
| Rated DC voltage    | 12 V    |
| Inverter technology | Yes     |
| Product weight      | 45000 g |

## Full product description

### Your reliable power source in the event of a power outage

Specially designed to be one of the most valuable tools at home or work. **With a power output of 3kW, lack of electricity will no longer be a problem.** Hybrid generators (**CNG/LPG/petrol**) are ideal for powering a variety of equipment, at the campsite or at home. With a maximum output of 3000W and a rated output of 2800W, this generator **runs for up to 11 hours** at 100% load! **The Extralink EGH-3000 hybrid generator** will become your reliable power source in case of power outages.



**FUEL TYPE**

 Petrol
  LPG
  CNG

**Tank capacity**  
**15L**


**Oil tank capacity**  
**0,6L**

**Fuel consumption**  
**395 g/kW.H**

### Key features of the Extralink EGH-3000 generator set

- Stable and robust
- Operating time up to 11 hours

- High-quality pure copper motor ensures reliable operation
- The use of gas as a fuel produces fewer pollutants
- Tank capacity 15L
- Durable steel frame extends engine life
- Single-cylinder, 4-stroke, air-cooled engine
- Manual launch system
- 1 phase

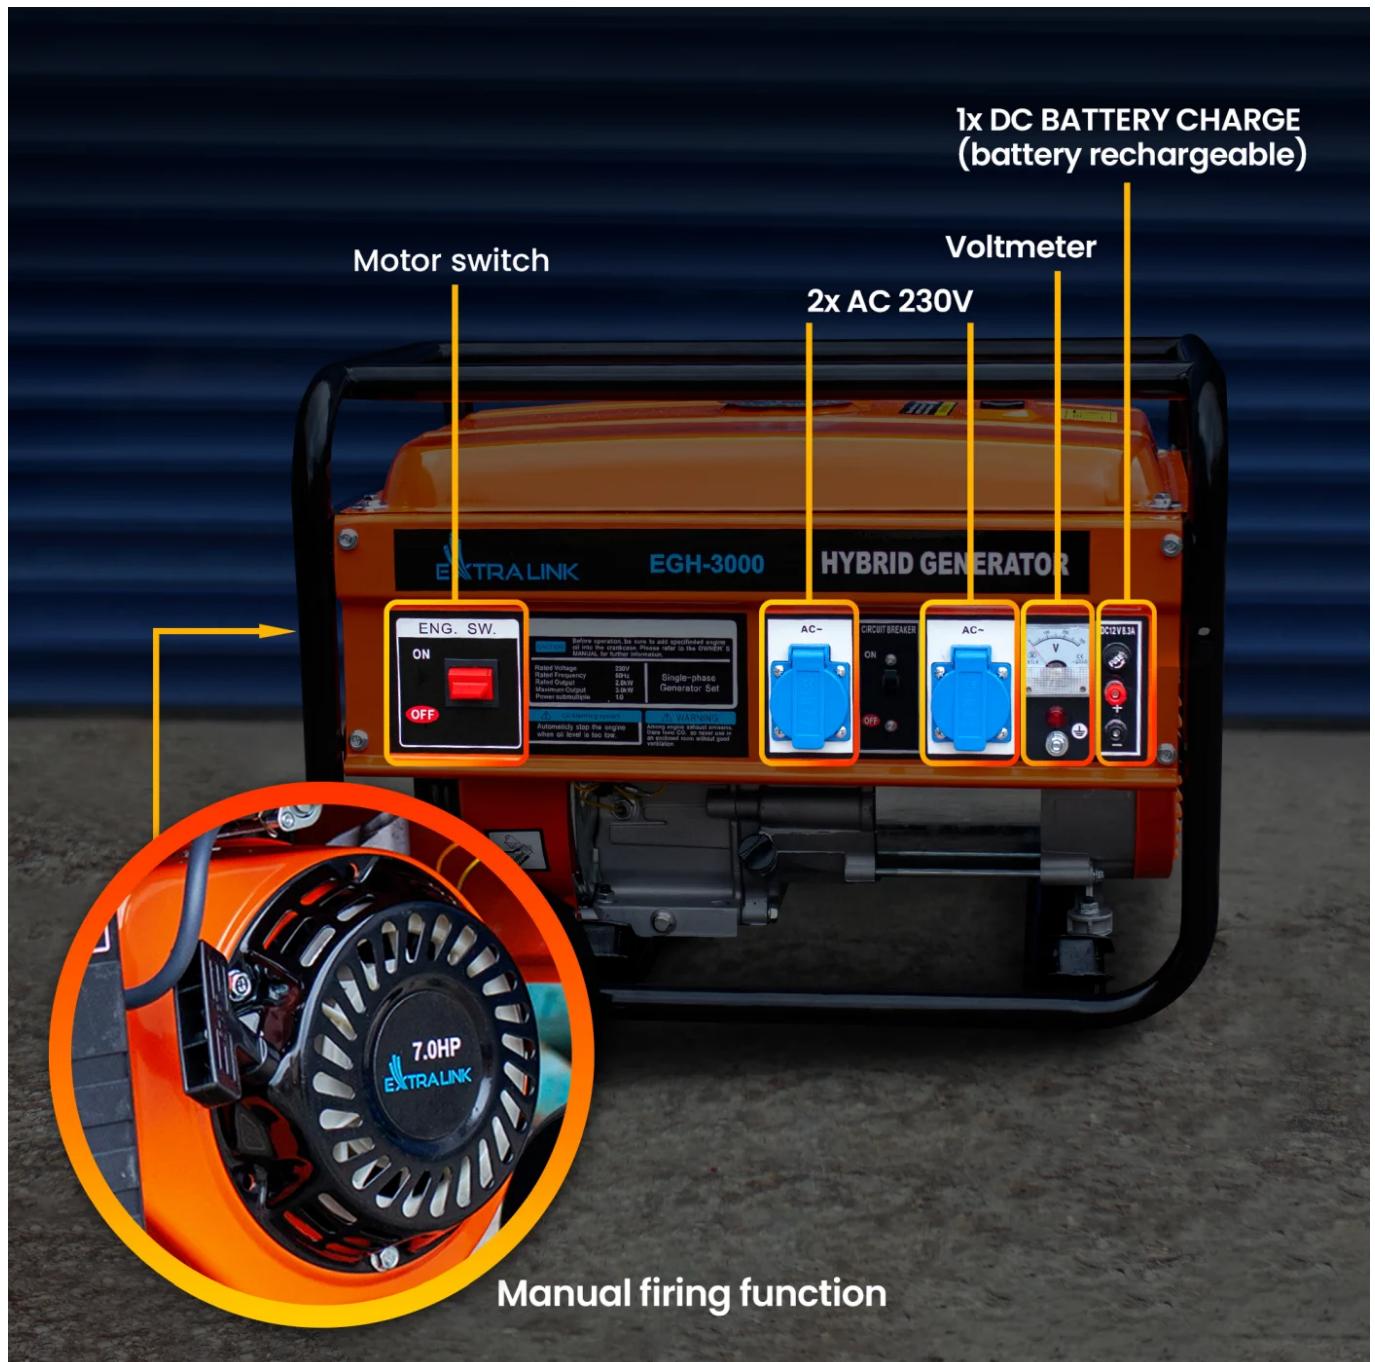

## Generator with 4-stroke gasoline engine

The **Extralink EGH-3000 hybrid generator set (gasoline, LPG, CNG)** is equipped with a compact **4-stroke OHV engine** with a capacity of 210 cm<sup>3</sup>. There are **two standard 230-volt outlets** on the control panel. The easy start system allows the engine to start quickly and with little effort.

# GENERATOR EGH-3000



Maximum power  
**3000W**



Rated output  
**2800W**



Good quality  
**AVR**



Operating time  
**11h**



**100%**  
copper generator



Single-cylinder  
4-stroke engine



## Larger fuel tank for extended run time

Extralink hybrid generators are equipped with an enlarged steel fuel tank, which increases the operating time of the generators without refueling. The **genset is capable of continuous operation for up to 11 hours**. The lower the power, the longer the continuous operation time of the genset will be.

## Robust design and easy transportation

The **hybrid engine generator** is equipped with a sturdy steel frame, which serves to protect the generator from various types of damage. Sturdy wheels and sturdy handles make it easy to transport the Extralink gasoline generator.



## Fail-safe features

The **Extralink EGH-3000 hybrid** generator is equipped with a protection system that will prevent failures and stop the hybrid generator in case of overload. In addition, the protection system will not allow the engine to start when the oil level drops

# PROTECTION AGAINST FAILURES

The Extralink EGH-3000 hybrid generator is equipped with a protection system that will prevent failures and stop the hybrid generator in the event of an overload. In addition, the protection system will not allow the engine to start if the oil level drops



## Start-up procedure (hybrid generator)

### Advantages of using gas as a fuel

- The biggest advantage of gas as a fuel is lower operating costs (cylinder gas is currently cheaper than gasoline). As the price of gasoline rises, it becomes a less attractive fuel.
- You have more flexibility to extend your working time, simply use a larger cylinder if you need more working time; you are no longer limited by the internal fuel tank
- Lower emissions of harmful exhaust fumes into the atmosphere allow use in situations where gasoline is not suitable, such as near food or in areas where gasoline is prohibited due to fire hazards.
- It also has no storage problems, unlike gasoline, which loses quality and has a very strong odor.
- Reduced maintenance costs due to cleaner operation; gasoline degrades over time and can clog the carburetor or interfere with its operation.
- Much easier refueling of the generator, just connect a new cylinder.
- As more and more places, especially campgrounds, ban gasoline and diesel, demand for LPG generators will only increase in the future.

|                                | Benzynowe                                                                         |                                                                                   | Hybrydowe (LPG, CNG, Benzyna)                                                      |                                                                                     |                                                                                     |
|--------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Kod produktu                   | EGP-3000                                                                          | EGP-5500                                                                          | EGH-3000                                                                           | EGH-5500                                                                            | EGH-7000                                                                            |
| EAN                            | 5905090330349                                                                     | 5905090330356                                                                     | 5905090330363                                                                      | 5905090330370                                                                       | 5905090330714                                                                       |
| Kod 1                          | EX.30349                                                                          | EX.30356                                                                          | EX.30363                                                                           | EX.30370                                                                            | EX.30714                                                                            |
| Zdjęcie poglądowe              |  |  |  |  |  |
| Model generatora:              | Benzynowe                                                                         | Benzynowe                                                                         | Hybrid(CNG/LPG/benzyna)                                                            | Hybrid(CNG/LPG/benzyna)                                                             | Hybrid(CNG/LPG/benzyna)                                                             |
| Znamionowa moc wyjściowa:      | 2.8KW                                                                             | 5.0KW                                                                             | 2.8KW                                                                              | 5.0KW                                                                               | 7.0KW                                                                               |
| Maksymalna moc wyjściowa:      | 3.0KW                                                                             | 5.5KW                                                                             | 3.0KW                                                                              | 5.5KW                                                                               | 7.5KW                                                                               |
| Znamionowe napięcie wyjściowe: | 220V~                                                                             | 220V~                                                                             | 220V~                                                                              | 220V~                                                                               | 220V~                                                                               |
| Częstotliwość:                 | 50Hz                                                                              | 50Hz                                                                              | 50Hz                                                                               | 50Hz                                                                                | 50Hz                                                                                |
| Faza:                          | 1 faza                                                                            | 3 fazy                                                                            | 1 faza                                                                             | 3 fazy                                                                              | 3 fazy                                                                              |
| Silnik:                        | 170F                                                                              | 188F                                                                              | 170F                                                                               | 188F                                                                                | 192F                                                                                |
| Rozmiar uzwojenia:             | 160*120mm                                                                         | 190*140mm                                                                         | 160*120mm                                                                          | 190*140mm                                                                           |                                                                                     |
| Typ silnika:                   | 1-cylinder,<br>4-suw,<br>chłodzony powietrzem                                     | 1-cylinder,<br>4-suw,<br>chłodzony powietrzem                                     | 1-cylinder,<br>4-suw,<br>chłodzony powietrzem                                      | 1-cylinder,<br>4-suw,<br>chłodzony powietrzem                                       | 1-cylinder,<br>4-suw,<br>chłodzony powietrzem                                       |
| Przemieszczenie:               | 210CC                                                                             | 389CC                                                                             | 210CC                                                                              | 389CC                                                                               | 459CC                                                                               |
| Maksymalna wydajność:          | 7HP/3000obr/min                                                                   | 13HP/3000obr/min                                                                  | 7HP/3000obr/min                                                                    | 13HP/3000obr/min                                                                    | 18HP/3000obr/min                                                                    |
| Średnica x skok:               | 70x54mm                                                                           | 88x64mm                                                                           | 70x54mm                                                                            | 88x64mm                                                                             | 92x69mm                                                                             |
| Sytem zapłonu:                 | TCI                                                                               | TCI                                                                               | TCI                                                                                | TCI                                                                                 | CDI                                                                                 |
| Pojemność baku:                | 15L                                                                               | 25L                                                                               | 15L                                                                                | 25L                                                                                 | 25L                                                                                 |
| Zużycie paliwa:                | 395 g/kW.H                                                                        | 374 g/kW.H                                                                        | 395 g/kW.H                                                                         | 374 g/kW.H                                                                          | 2L/H                                                                                |
| Ciągła godzina pracy:          | 11 godzin                                                                         | 11 godzin                                                                         | 11 godzin                                                                          | 11 godzin                                                                           | 11 godzin                                                                           |
| Pojemność oleju:               | 0,6L                                                                              | 1,1L                                                                              | 0,6L                                                                               | 1,1L                                                                                | 1,1L                                                                                |
| Hałas (7 metrów)               | 95dB                                                                              | 97dB                                                                              | 95dB                                                                               | 97dB                                                                                | 97dB                                                                                |
| NW/GW                          | 45/48KG                                                                           | 81/83KG                                                                           | 45/48KG                                                                            | 81/83KG                                                                             | 92KG                                                                                |
| Wymiar pakowania:              | 605x440x440mm                                                                     | 690x525x550mm                                                                     | 605x440x440mm                                                                      | 690x525x550mm                                                                       | 710x555x565mm                                                                       |
| System startowy:               | ręczny                                                                            | ręczny/elektryczny                                                                | ręczny                                                                             | ręczny/elektryczny                                                                  | ręczny/elektryczny                                                                  |