



Extralink EGP-3000 | Power generator | petrol, 3kW 1F



link to the product:

<https://www.batna24.com/gb/p/generators/extralink-egp-3000-power-generator-petrol-3kw-1f>

Price: **1,999.00 zł** gross / 1,625.20 zł net

Manufacturer: EXTRALINK



Referention number: DNXGGJORDRMMKL

Product features

Rated current	8.3 A
Number of strokes	4
Number of cylinders	1
Frame material	Metal
Rated power	2800 W
Rated frequency	50 Hz
Engine power	7 hp
Package weight	48000 g
Cooling type	Air
Package depth	440 mm
Package height	440 mm
Package width	605 mm
Maximum power	3000 W
Castor wheels	Yes
Rated voltage	220 V
Fuel tank material	Steel
Number of batteries supported	1
Fuel consumption	1.2 l/h
Product colour	Black
Fuel type	Petrol

Ignition system	Manual
Rated DC voltage	12 V
Inverter technology	Yes
Product weight	45000 g

Full product description

Your reliable power source in the event of a power outage

Specially designed to be one of the most valuable tools at home or work. **With a power output of 3kW, lack of electricity will no longer be a problem.** Gasoline generators are ideal for powering all kinds of equipment, at the campsite or at home. This generator with a maximum power of 3000W and a rated power of 2800W **works up to 11 hours** at 100% load! **The Extralink EGP-3000 gasoline generator** will become your reliable source of power in case of power failure.



FUEL TYPE: BENZINE

Tank capacity

15L

Oil tank capacity

0,6L


Fuel consumption

395 g/kW.H

Key features of the Extralink EGP-3000 generator set

- Fuel type: gasoline
- High-quality pure copper motor

- Stable and robust
- Operating time up to 11 hours
- Durable steel frame
- Tank capacity 15L
- Single-cylinder, 4-stroke, air-cooled engine
- Manual launch system
- 1 phase

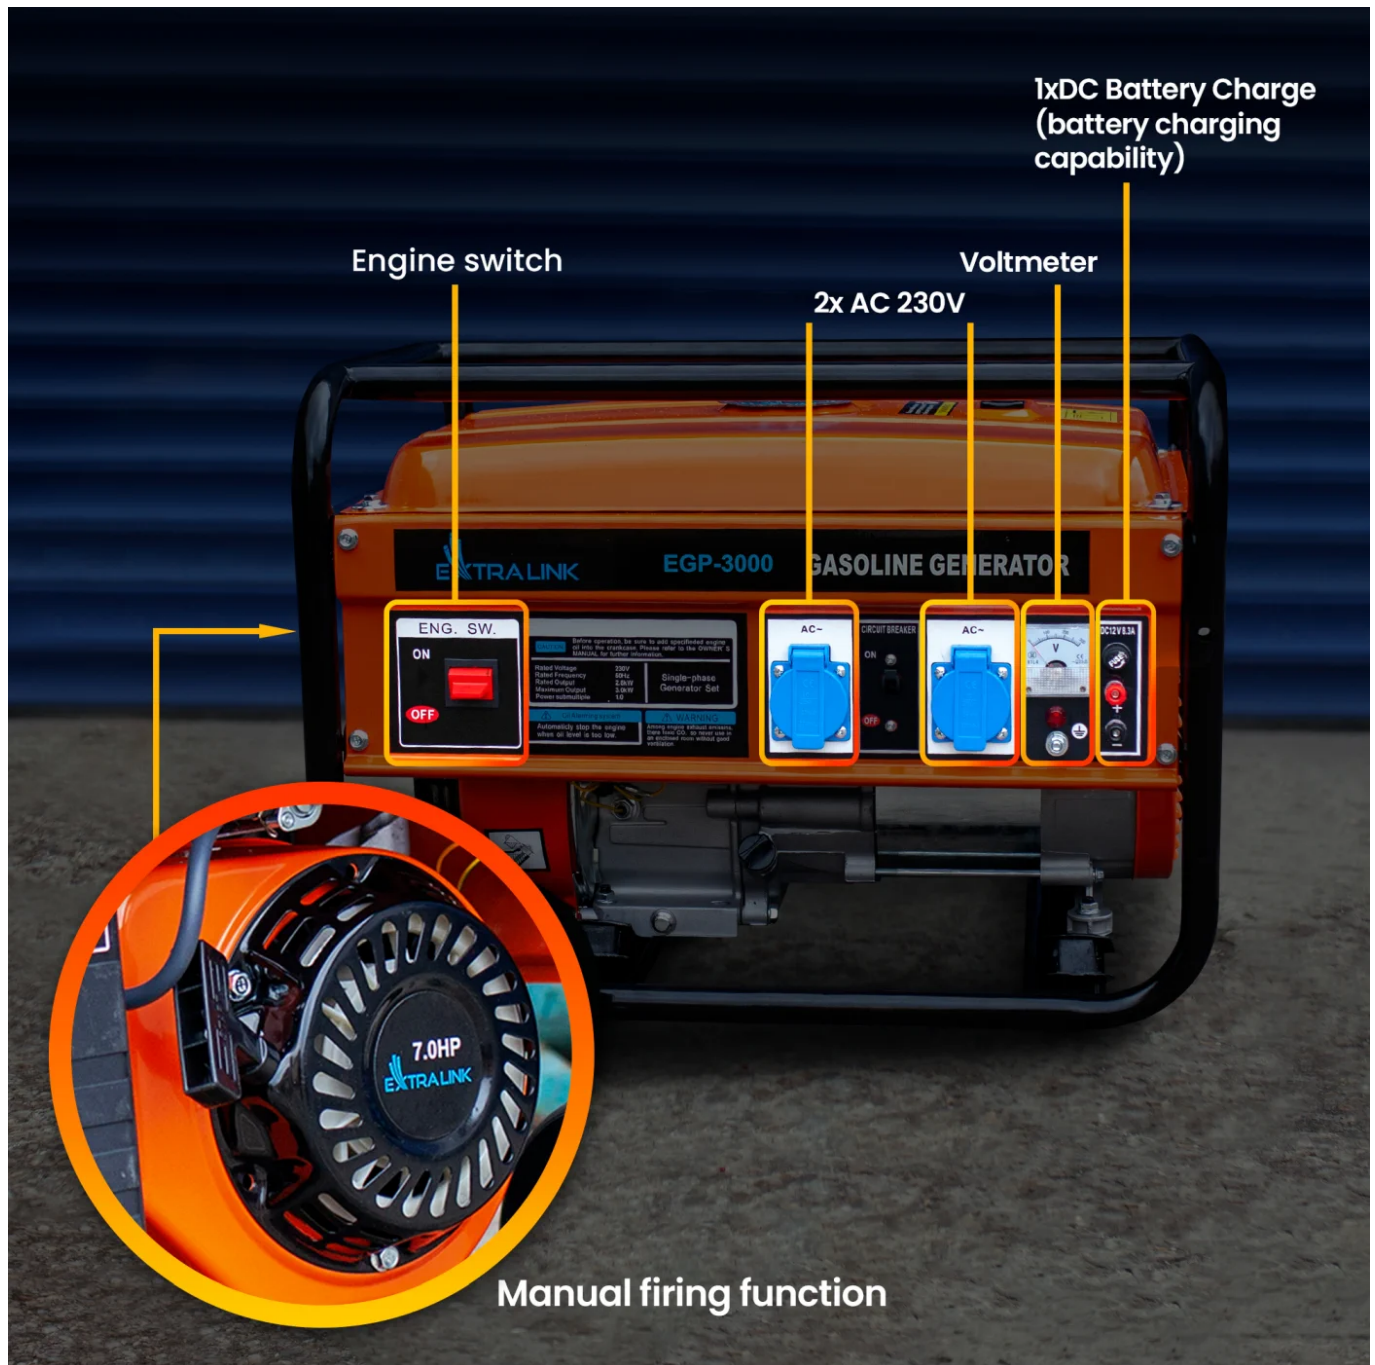

Generator with 4-stroke gasoline engine

The **Extralink EGP-3000 gasoline generator set** is equipped with a compact **4-stroke OHV engine** with a capacity of 210 cm³. There are **two standard 230-volt outlets** on the control panel. The easy start system allows the engine to start quickly and with little effort.

GENERATOR **EGP-3000**



Maximum power
3000W



Rated output
2800W



Good quality
AVR



Operating time
11h



100%
copper generator



Single-cylinder
4-stroke engine



Larger fuel tank for extended run time

Extralink generators are equipped with an enlarged steel fuel tank, which extends the running time of the generators without refueling. The genset **is capable of continuous operation for up to 11 hours**. The lower the power, the longer the continuous operation time of the genset will be.

Robust design and easy transportation

The gasoline generator is equipped with a sturdy steel frame, which serves to protect the generator from various types of damage. Sturdy wheels and sturdy handles make it easy to transport the Extralink gasoline generator.

Generator **EGP-3000**

Robust wheels and sturdy handles allow the generator to be easily transported



Fail-safe features

The **Extralink EGP-3000 gasoline generator** is equipped with a protection system that will prevent malfunctions and stop the gasoline generator in the event of an overload. In addition, the protection system will not allow the engine to start when the oil level drops

PROTECTION AGAINST FAILURES

The Extralink EGP-5500 hybrid generator is equipped with a protection system that will prevent failures and stop the hybrid generator in the event of an overload. In addition, the protection system will not allow the engine to start if the oil level drops



Start-up procedure (hybrid generator)

	Benzynowe		Hybrydowe (LPG, CNG, Benzyna)		
Kod produktu	EGP-3000	EGP-5500	EGH-3000	EGH-5500	EGH-7000
EAN	5905090330349	5905090330356	5905090330363	5905090330370	5905090330714
Kod 1	EX.30349	EX.30356	EX.30363	EX.30370	EX.30714
Zdjęcie poglądowe					
Model generatora:	Benzynowe	Benzynowe	Hybrid(CNG/LPG/benzyna)	Hybrid(CNG/LPG/benzyna)	Hybrid(CNG/LPG/benzyna)
Znamionowa moc wyjściowa:	2.8KW	5.0KW	2.8KW	5.0KW	7.0KW
Maksymalna moc wyjściowa:	3.0KW	5.5KW	3.0KW	5.5KW	7.5KW
Znamionowe napięcie wyjściowe:	220V~	220V~	220V~	220V~	220V~
Częstotliwość:	50Hz	50Hz	50Hz	50Hz	50Hz
Faza:	1 faza	3 fazy	1 faza	3 fazy	3 fazy
Silnik:	170F	188F	170F	188F	192F
Rozmiar uzwojenia:	160*120mm	190*140mm	160*120mm	190*140mm	
Typ silnika:	1-cylinder, 4-suw, chłodzony powietrzem	1-cylinder, 4-suw, chłodzony powietrzem	1-cylinder, 4-suw, chłodzony powietrzem	1-cylinder, 4-suw, chłodzony powietrzem	1-cylinder, 4-suw, chłodzony powietrzem
Przemieszczenie:	210CC	389CC	210CC	389CC	459CC
Maksymalna wydajność:	7HP/3000obr/min	13HP/3000obr/min	7HP/3000obr/min	13HP/3000obr/min	18HP/3000obr/min
Średnica x skok:	70x54mm	88x64mm	70x54mm	88x64mm	92x69mm
Sytem zapłonu:	TCI	TCI	TCI	TCI	CDI
Pojemność baku:	15L	25L	15L	25L	25L
Zużycie paliwa:	395 g/kW.H	374 g/kW.H	395 g/kW.H	374 g/kW.H	2L/H
Ciągła godzina pracy:	11 godzin	11 godzin	11 godzin	11 godzin	11 godzin
Pojemność oleju:	0,6L	1,1L	0,6L	1,1L	1,1L
Hałas (7 metrów)	95dB	97dB	95dB	97dB	97dB
NW/GW	45/48KG	81/83KG	45/48KG	81/83KG	92KG
Wymiar pakowania:	605x440x440mm	690x525x550mm	605x440x440mm	690x525x550mm	710x555x565mm
System startowy:	ręczny	ręczny/elektryczny	ręczny	ręczny/elektryczny	ręczny/elektryczny