

NanoBracket® for NBE-M5-19

BRACKET FOR NANOBEAM®M5-19 AND 5AC-19

NanoBracket for NBE-M5-19 is our 2nd Generation mounting system for 5GHz/19dBi NanoBeam CPE from UBNT. This NanoBracket has a solid base made of die cast aluminum and allows for 140° of smooth and precise adjustment in azimuth, elevation and rotation using our original ball hinge.



Large mounting surface and all stainless steel hardware make the overall robustness of the bracket SOLID.



TECHNICAL DATA

Materials	Bracket - UV stabilized and weather resistant ABS plastic Holder - ADC 12 Hardware - Stainless Steel
Flame Rating	UL 94 HB
Pole Mounting Diameter	50-70 mm
Wall Mounting	Yes
Operating Temp.	-30 to + 60 °C
Wind Survival	120 Km/h
Weight	0.3 Kg / 0.68 lbs – single unit incl. package 16.4 Kg / 36.16 lbs – carton (50 units)
Single Unit	Retail Box: 9 x 9 x 15 cm
50 units	Carton Box: 48 x 34 x 47 cm

PRODUCT DIMENSIONS

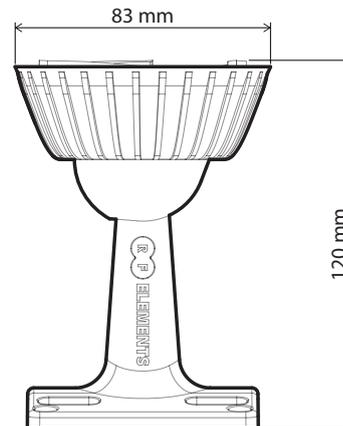

COMPATIBLE WIRELESS PLATFORMS

Ubiquiti Networks™	NanoBeam® 5AC-19 NanoBeam® 5AC-19 Gen2 NanoBeam® M5-19
--------------------	--

PACKAGE CONTENTS

- Bracket Body
- Holder
- Screw 3,5 x 45 mm (4 pcs)
- Wall Plug (4 pcs)
- Hose Clamp (1pc)