


Duct Cable Specification (Tensile -1500N)

Cable Design

Loose Tube Optical Fiber Cable-Dielectric-Dry Core-G.652D Fiber

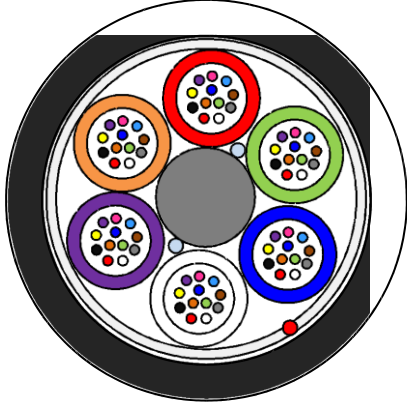

Central Strength Member (CSM): glass fiber reinforced plastic rod (FRP), with PE sheath covering when needed.

Loose Tube: PBT plastic material, containing 12 fibers and filled with a suitable water tightness compound.

Filler Elements: nature PP plastic rods, when needed.

Stranding: loose tubes (and fillers), SZ stranded around the CSM.

Longitudinal Water Tightness: dry core with water swellable elements.

Ripcord(s): 1 polyester ripcord under sheath.

Outer Sheath: Black HDPE.

Cable Specification

Cable Cores		12	24	36	48	72	96	144
No. of Tubes		1	2	3	4	6	8	12
No. of Fillers		5	4	3	2	0		
Fiber Counts in Tube		12						
Tube/Filler- Φ	mm	1.9					1.9	
CSM- Φ	mm	2.0				2.5	3.0	
Coated CSM- Φ	mm	/				3.3	5.8	
Thickness of Outer PE Sheath	mm	1.5					1.5	
Nominal Cable Diameter	mm	9.2				10.1	12.6	
Nominal Cable Weight	Kg/km	71				81	92	
Tensile	N	1500						

Cable Application

Temperature Range		Minimum Bend Radius	
Transportation & Storage	-30~+70°C	Load	20×D
Operation	-30~+70°C	Unload	10×D

Main Mechanical and Environmental Characteristics

Test	Test Standard	Specified Value	Acceptance Criteria
Tensile	IEC 60794-1-2-E1	Tensile, 1min	$\Delta\alpha$ reversible, fiber strain \leq 0.6 %
Crush	IEC 60794-1-2-E3	1200N/10cm, 1min, 3times	$\Delta\alpha$ reversible, no damage
Impact	IEC 60794-1-2-E4	3J, R=10mm, 3impacts	$\Delta\alpha$ reversible, no damage
Repeated Bending	IEC 60794-1-2-E6	R=20D, 100N, 100cycles	$\Delta\alpha$ reversible, no damage
Bending	IEC 60794-1-2-E11	R=10D, 5turns, 5cycles	$\Delta\alpha$ reversible, no damage
Torsion	IEC 60794-1-2-E7	100N, 5cycles, +/-180°	$\Delta\alpha$ reversible, no damage
Temperature Cycling	IEC 60794-1-2-F1	-25~+70°C, 2cycles, 4h	$\Delta\alpha\leq$ 0.05dB/km, no damage
Water Penetration	IEC 60794-1-2-F5	3m sample, 1m height, 24h	No water leakage

Fiber & Tube Color

Color Identification of Fiber

Number	1	2	3	4	5	6	7	8	9	10	11	12
Color	Red	Green	Blue	White	Violet	Orange	Grey	Yellow	Brown	Pink	Black	Aqua

Color Identification of Tube

Number	1	2	3	4	5	6	7	8	9	10	11	12
Color	Red	Green	Blue	White	Violet	Orange	Grey	Yellow	Brown	Pink	Black	Aqua

Cabled Fiber Performance (G.652D)

Characteristics		Acceptance Value
Attenuation	@1310nm	≤ 0.35 dB/km
	@1550nm	≤ 0.21 dB/km
Mode Field Diameter	@1310nm	9.2 ± 0.4 μ m
	@1550nm	10.4 ± 0.5 μ m
Dispersion	@1300 +30/-15nm	≤ 3.5 ps/(nm \cdot km)
	@1550nm	≤ 18.0 ps/(nm \cdot km)
	@1625nm	≤ 22 ps/(nm \cdot km)
Zero-Dispersion wavelength		1300nm ~ 1324nm
Zero-Dispersion slope		≤ 0.092 ps/(nm ² \cdot km)
Cable cutoff wavelength λ_{cc} (nm)		≤ 1260 nm
Cladding diameter		125 ± 1.0 μ m
Cladding non-circularity		$\leq 0.8\%$
Core/cladding concentricity error		≤ 0.6 μ m
Fiber diameter with coating (uncolored)		245 ± 10 μ m
Cladding/coating concentricity error		≤ 12.0 μ m
Proof stress		≥ 0.69 GPa(100kpsi)
Dynamic stress corrosion susceptibility parameter (typical value)		≥ 20

Sheath Marking

The outer sheath is marked in 1 meter intervals as follows:

According to customer's requirement

Delivery Lengths

Standard delivery length will be 4km with -1%/+3% tolerance.